

Version: V1.0.0
Level: Confidential

Shenzhen Concox Information Technology Co., Ltd

GPS Tracker Communication Protocol (GT700, GT710)

Content

I. PROTOCOL PACKET FORMAT.....	3
1.1. Protocol Number.....	3
II. PROTOCOL PACKET.....	4
1. Login packet.....	4
1.1. Login Message Packet -----	4
1.2. Login Packet Response (Server Response) -----	5
2. Heartbeat Packet.....	6
2.1. Heartbeat Packet Sent by Terminal -----	6
2.2. Server Responds The Heartbeat Packet -----	7
3. GPS location packet.....	7
3.1. Location Packet Sent by Terminal -----	8
3.2. Server Location Packet Response -----	10
4. Alarm Packet.....	11
4.1. Alarm Packet Sent by Terminal -----	11
4.2. Alarm Packet Response by Server -----	13
5. GPS Address Request Packet.....	14
5.1. Terminal Address Request Packet -----	14
5.2. Chinese Response of Server Address Request Packet -----	14
5.3. English Response of Server Address Request Packet -----	15
6. LBS Address Request Packet.....	17
6.1. Terminal Address Request Packet -----	18
6.2. Chinese Response of Server Address Request Packet -----	19
6.3. English Response of Server Address Request Packet -----	19
7. Online command.....	20
7.1. Online command sent by server -----	21
7.2. Online command replied by terminal -----	22
8. Time Packet.....	23
8.1. Time Request Sent by Terminal -----	23
8.2. Server Response Time Information -----	24
9. Information transmission packet.....	25
9.1. Information transmission packet sent by terminal -----	25
9.2. Server Response Information Transmission Packet -----	26
III. APPENDIX.....	27
1. CODE FRAGMENT OF THE CRC-ITU LOOKUP TABLE ALGORITHM IMPLEMENTED BASED ON C LANGUAGE.....	27
2. DATA FLOW DIAGRAM.....	28

I. Protocol Packet Format

Format	Length (Byte)	Description
Start Bit	2	0x78 0x78 (packet length : 1bit) or 0x79x79 (packet length 2 bits)
Packet Length	1(2)	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number	1	Transmission packet type (see the following diagram for details)
Information Content	N	The specific contents are determined by the protocol numbers corresponding to different applications.
Information Serial Number	2	The serial number of the first GPRS data (including status packet and data packet such as GPS, LBS) sent after booting is '1', and the serial number of data sent later at each time will be automatically added '1'.
Error Check	2	Serial Number (including "Packet Length" and "Information Serial Number"), are values of CRC-ITU. CRC error occurs when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit	2	Fixed value:0x0D0x0A

1.1 Protocol Number

Login Information	0x01
Positioning Data (UTC)	0x22
Heartbeat Packet	0x23
Online Command Response of Terminal	0x21
Alarm Data (UTC)	0x26
GPS Address Inquiry Packet (UTC)	0x2A
LBS Address Inquiry Packet	0x17
Online Command	0x80
Time Check Packet	0x8A
Information Transmission Packet	0x94

II. Protocol Packet

1. Login packet

Description:

- Login packet is the information packet connecting the terminal and platform, it can send terminal information to platform.
- If a GPRS connection is established successfully, the terminal will send a first login message packet to the server and, within five seconds, if the terminal receives a data packet responded by the server, the connection is considered to be a normal connection; if not, the terminal will send login packet again.
- If no packet returned by server within 5 seconds, then the response of login packet is timeout.
- Terminal reboot automatically after 3 timeouts.

1.1 Login Message Packet

		Length	Description
Start Bit		2	0x78 0x78
Packet Length		1	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number		1	0x01
Information Content	Terminal ID	8	Example: IMEI number is 123456789123456, terminal ID is: 0x01 0x23 0x45 0x67 0x89 0x120x34 0x56
	Model Identification Code	2	Distinguish model of terminal by identification code.
	Time Zone Language	2	See the following chart for details of time zone language mark.
Information Serial Number		2	The serial number of the first GPRS data (including status packet and data packet such as GPS, LBS) sent after booting is '1', and the serial number of data sent later at each time will be automatically added '1'.
Error Check		2	Serial Number (including "Packet Length" and "Information Serial Number"), are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit		2	Fixed value:0x0D 0x0A

Example: 78 78 0D 01 03 53 41 90 33 41 28 36 00 0D 33 51 0D 0A

Time Zone Language

One and a half bits bit15—bit4	15	Time zone value expands 100 times
	14	
	13	
	12	
	11	

	10		
	9		
	8		
	7		
	6		
	5		
	4		
Lower half bit4-bit0	3	GMT	
	2	No definition	
	1	Language Select Bit	1
	0	Language Select Bit	0

Bit3 0-----Eastern time
 1-----Western time

Example: Extended bit: 0x32 0x00 means GMT+8

Calculation method: 8*100=800 converts to HEX: 0X0320

Extended bit: 0x4D 0xD8 means GMT-12:45

Calculation method: 12.45*100=1245 converts to HEX: 0x04 0xDD

Here, to save 4 bytes, calculation result left shifted 4 bits and combined eastern time, western time and language bit.

1.2 Login packet response (server response)

1.	Length	Description
Start Bit	2	0x78 0x78
Packet Length	1	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number	1	0x01
Information Serial Number	2	Serial number of data sent later each time will be automatically added '1'.
Error Check	2	Serial Number (including "Packet Length" and "Information Serial Number"), are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit	2	Fixed value:0x0D 0x0A

Example: 78 78 05 01 00 05 9F F8 0D 0A

2. Heartbeat Packet

Description:

- Heartbeat packet is a data packet to maintain the connection between the terminal and the server.
- If a GPRS connection is established successfully, the terminal will send a first login message packet to the server and, within five seconds, if the terminal receives a data packet responded by the server, the connection is considered to be a normal connection; if not, the terminal will send login packet again.
- If no packet returned by server within 5 seconds, then the response of heartbeat packet is timeout.
- Terminal reboot automatically after 3 timeouts.

2.1. Heartbeat packet sent by terminal

Heartbeat Packet (GW110, GT700, GT710)

		Length (Byte)	Description
Start Bit		2	0x78 0x78
Packet Length		1	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number		1	0x23
Information Content	Terminal Information Content	1	See the following diagram for details
	Voltage Level	2	Transformation method: To divide by 100 after converting hexadecimal into decimal. Example : 0X01,0X9F, 019F converted to decimal is 415. Divide 415 by 100 get 4.15. 4.15 is the terminal's voltage level.(See appendix for voltage-battery correspondence)
	GSM Signal Strength	1	0x00: no signal; 0x01: extremely weak signal; 0x02: weak signal; 0x03: good signal; 0x04: strong signal.
	Language/Extended Port Status	2	latter bit 0x01 Chinese 0x02 English
Serial Number		2	Serial number of data sent later each time will be automatically added '1'.
Error Check		2	Serial Number (including "Packet Length" and "Information Serial Number"), are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit		2	Fixed value: 0x0D 0x0A

Example: 78 78 0B 23 C0 01 22 04 00 01 00 08 18 72 0D 0A

Terminal Information

One byte is consumed defining for various status information of the mobile phone.

Bit		Code Meaning
BYTE	Bit7	1: Oil and electricity disconnected
		0: Oil and electricity connected
	Bit6	1: GPS tracking is on
		0: GPS tracking is off
	Bit3~Bit5	Extended Bit
	Bit2	1: Charge On
		0: Charge Off
	Bit1	1: ACC high
		0: ACC Low
	Bit0	1: Defense Activated
0: Defense Deactivated		

2.2 Server Responds The Heartbeat Packet

	Length (Byte)	Description
Start Bit	2	0x780x78
Packet Length	1	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number	1	0x23
Serial Number	2	Serial number of data sent later at each time will be automatically added '1'.
Error Check	2	Serial Number (including "Packet Length" and "Information Serial Number"), are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit	2	Fixed value: 0x0D 0x0A

Example : 78 78 05 23 01 00 67 0E 0D 0A

3. GPS location packet

Description:

- Data packet used to transmit terminal location
- Upload locating data based on rule after successfully connected and positioned.
- Re-upload locating data after successfully connected.

3.1 Location packet sent by terminal

		Length	Description
Start Bit		2	0x78 0x78
Packet Length		1	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number		1	0x22 (UTC)
Information Content	Date Time	6	Year (1byte) Month (1byte) Day (1byte) Hour (1byte) Min (1byte) Second (1byte) (converted to decimal) (Date Time)
	Quantity of GPS satellites	1	The first character is GPS information length. The second character is positioning satellite number (converted to a decimal)
	Latitude	4	Convert to a decimal and divide 1800000
	Longitude	4	Convert to a decimal and divide 1800000
	Speed	1	Convert to a decimal
	Course, Status	2	Convert to binary number of 16 bits and calculate by bits (see the following diagram)
	MCC	2	Mobile Country Code(MCC) (converted to a decimal)
	MNC	1	Mobile Network Code(MNC)(converted to a decimal)
	LAC	2	Location Area Code (LAC) (converted to a decimal)
	Cell ID	3	Cell Tower ID(Cell ID)(converted to a decimal)
	ACC	1	ACC Status ACC low: 00, ACC high: 01 (not available for 06)
	Data Upload Mode	1	GPS data upload mode (06 series are excluded) 0x00 Upload by time interval 0x01 Upload by distance interval 0x02 Inflection point upload 0x03 ACC status upload 0x04 Re-upload the last GPS point when back to static. 0x05 Upload the last effective point when network recovers.
GPS Real-Time Re-upload	1	0x00 Real time upload 0x01 Re-upload (06 series are excluded)	

	Mileage	4	Divided by 100 after turn HEX into decimal. (Only available for devices with this function)
	Serial Number	2	Serial number of data sent later at each time will be automatically added '1'.
	Error Check	2	Serial Number (including "Packet Length" and "Information Serial Number") , are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
	Stop Bit	2	Fixed value:0x0D 0x0A

Example: 78 78 22 22 0F 0C 1D 02 33 05 C9 02 7A C8 18 0C 46 58 60 00 14 00 01 CC 00 28 7D 00 1F 71 00 00 01 00 08 20 86 0D 0A

i. Course & Status

Two bytes are consumed, defining the running direction of GPS. The value ranges from 0° to 360° measured clockwise from north of 0°.

BYTE_1	Bit7	0
	Bit6	0
	Bit5	GPS real-time/differential positioning
	Bit4	GPS having been positioning or not
	Bit3	East Longitude, West Longitude
	Bit2	South Latitude, North Latitude
	Bit1	Course
Bit0		
BYTE_2	Bit7	
	Bit6	
	Bit5	
	Bit4	
	Bit3	
	Bit2	
	Bit1	
	Bit0	

For example: the value is 0x15 0x4C, the corresponding binary is 00010101 01001100,

- BYTE_1 Bit7 0
- BYTE_1 Bit6 0
- BYTE_1 Bit5 0 (real time GPS)
- BYTE_1 Bit4 1 (GPS has been positioned)
- BYTE_1 Bit3 0 (East Longitude)
- BYTE_1 Bit2 1 (North Latitude)
- BYTE_1 Bit1 0
- BYTE_1 Bit0 1

BYTE_2 Bit7	0	
BYTE_2 Bit6	1	
BYTE_2 Bit5	0	→ Course 332° (0101001100 in Binary, or 332 in decimal)
BYTE_2 Bit4	0	
BYTE_2 Bit3	1	
BYTE_2 Bit2	1	
BYTE_2 Bit1	0	
BYTE_2 Bit0	0	_____

which means GPS tracking is on, real time GPS, location at north latitude, east longitude and the course is 332°.

3.2 Server location packet response

Location packet server no response

4 Alarm Packet

Description:

- Transmit alarm content defined by terminal
- Server response and parse longitude and latitude into address and re-upload to terminal after receiving the alarm content
- Terminal send address to pre-set SOS number of device.

4.1 Alarm packet sent by terminal

Alarm packet

		Length	Description
Start Bit		2	0x78 0x78
Packet Length		1	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number		1	0x26 (UTC)
Information Content	Date Time	6	Year (1byte) Month (1byte) Day (1byte) Hour (1byte) Min (1byte) Second (1byte) (converted to a decimal) (Date Time)
	Quantity of GPS information satellites	1	The first character is GPS information length, The second character is positioning satellite number (converted to a decimal)
	Latitude	4	Convert to a decimal and divide 1800000
	Longitude	4	Convert to a decimal and divide 1800000
	Speed	1	Convert to a decimal
	Course, Status	2	Convert to binary number of 16 bits and calculate by bits (see the following diagram) (same as GPS packet, see GPS packet for details)
	MCC	2	Mobile Country Code(MCC) (converted to a decimal)
	MNC	1	Mobile Network Code(MNC)(converted to a decimal)
	LAC	2	Location Area Code (LAC) (converted to a decimal)
	Cell ID	3	Cell Tower ID(Cell ID)(converted to a decimal)
	Terminal Information	1	See the following diagram
	Voltage Level	1	0x00: No Power (shutdown) 0x01: Extremely Low Battery (not enough for calling or sending text messages, etc.) 0x02: Very Low Battery (Low Battery Alarm) 0x03: Low Battery (can be used normally) 0x04: Medium 0x05: High 0x06: Very High
	GSM Signal Strength	1	0x00: no signal; 0x01: extremely weak signal; 0x02: weak signal;

			0x03: good signal; 0x04: strong signal.
	Alarm/Language	2	See the following diagram
Serial Number		2	Serial number of data sent later at each time will be automatically added '1'.
Error Check		2	Serial Number (including "Packet Length" and "Information Serial Number") , are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit		2	Fixed value:0x0D 0x0A

Example: 78 78 25 26 0F 0C 1D 03 0B 26 C9 02 7A C8 18 0C 46 58 60 00 04 00 09 01 CC 00 28 7D 00 1F 71 80 04 04 13 02 00 0C 47 2A 0D 0A

i. Terminal Information

Bit		Code Meaning
BYTE	Bit7	1:Oil and electricity disconnected
		0: Oil and electricity connected
	Bit6	1: GPS tracking is on
		0: GPS tracking is off
	Bit3~Bit5	100: SOS
		011: Low Battery Alarm
		010: Power Cut Alarm
		001:Vibration Alarm
	Bit2	000: Normal
		1: Charging
	Bit1	0: Not Charge
		1: ACC high
	Bit0	0: ACC Low
		1: Defense Activated
	0: Defense Deactivated	

i. Alarm language

Byte 1	0x00: normal
	0x01: SOS
	0x02: Power cut alarm
	0x03: Vibration alarm
	0x04: Enter fence alarm
	0x05: Exit fence alarm
	0x06 Over speed alarm
	0x09 Vibration alarm
	0x0A Enter GPS dead zone alarm

	0x0B	Exit GPS dead zone alarm
	0x0C	Power on alarm
	0x0D	GPS First fix notice
	0x0E	Low battery alarm
	0x0F	Low battery protection alarm
	0x10	SIM change notice
	0x11	Power off alarm
	0x12	Airplane mode alarm
	0x13	Disassemble alarm
Byte 2	0x01	Chinese
	0x02	English

4.2 Alarm packet response of server

	Length	Description
Start Bit	2	0x78 0x78
Packet Length	1	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number	1	0x26 (UTC)
Information Serial Number	2	Serial number of data sent later at each time will be automatically added '1'.
Error Check	2	Serial Number (including "Packet Length" and "Information Serial Number"), are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit	2	Fixed value: 0x0D 0x0A

Example: 78 78 05 26 00 1C 9D 86 0D 0A

5 GPS Address Request Packet

Description:

- a) Users send address request command to terminal first, then terminal will send address request packet to server for address resolution.
- b) Terminal forwards the resolved address to user.

5.1 Terminal Address Request Packet

Format	Length (Byte)	Example
Start Bit	2	0x78 0x78
Packet Length	1	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number	1	0x2A
Information Content	Date Time	6 Year (1byte) Month (1byte) Day (1byte) Hour (1byte) Min (1byte) Second (1byte) (converted to a decimal)
	Quantity of GPS information satellites	1 The first character is GPS information length, The second character is positioning satellite number (converted to a decimal)
	Latitude	4 Convert to a decimal and divide 1800000
	Longitude	4 Convert to a decimal and divide 1800000
	Speed	1 Convert to a decimal
	Course, Status	2 Convert to binary number of 16 bits and calculate by bits (see the following diagram)
	Phone Number	21 Phone Number
	Alarm/Language	2 latter bit 0x01 Chinese 0x02 English
Serial Number	2	Serial number of data sent later at each time will be automatically added '1'.
Error Check	2	Serial Number (including "Packet Length" and "Information Serial Number"), are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit	2	Fixed value: 0x0D0x0A

Example: 78 78 2E 2A 0F 0C 1D 07 11 39 CA 02 7A C8 00 0C 46 58 00 00 14 D8 31 32 35 32 30 31 33 35 33 32 31 37 37 30 37 39 00 00 00 00 00 00 01 00 2A 6E CE 0D 0A

5.2 Chinese response of server address request packet

	Length	Description	
Start Bit	2	0x78 0x78	
Length of data bit	1	Length = Protocol Number + Information Content + Information Serial Number + Error Check	
Protocol Number	1	0x17	
Information Content	Length of Command	1	Server Flag Bit + Length of Command Content
	Server Flag Bit	4	It is reserved to the identification of the server.
	ADDRESS	8	Address request code mark (ASCII)
	&&	2	Separator (ASCII)
	Address Content	M	Address resolved by server (UNICODE)
	&&	2	Separator (ASCII)
	Phone Number	21	Request packet number by transmitted by server (ASCII)
	##	2	Separator (ASCII)
Information Serial Number	2	Serial number of data sent later at each time will be automatically added '1'.	
Check Bit	2	Serial Number (including "Packet Length" and "Information Serial Number"), are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)	
Stop Bit	2	Fixed value:0x0D 0x0A	

Example: 78 78 6E 17 68 00 00 00 01 41 44 44 52 45 53 53 26 26 4F 4D 7F 6E 00 3A 5E 7F 4E 1C 77 01 00 2E 60 E0 5D DE 5E 02 00 2E 60 E0 57 CE 53 3A 00 2E 4E 91 5C 71 89 7F 8D EF 00 2E 79 BB 60 E0 5D DE 5E 02 5B 66 59 27 65 59 80 B2 7E A6 00 32 00 35 7C 73 00 2E 26 26 38 36 31 33 34 32 31 36 33 32 36 39 39 00 00 00 00 00 00 00 00 23 23 00 16 C1 EC 0D 0A

5.3 English response of server address request packet

	Length	Description	
Start Bit	2	0x79 0x79	
Length of data bit	2	Length = Protocol Number + Information Content + Information Serial Number + Error Check	
Protocol Number	1	0x97	
Information Content	Length of Command	1	Server Flag Bit + Length of Command Content
	Server Flag Bit	4	Leave for server identification.
	ADDRESS	8	Address request code mark (ASCII)
	&&	2	Separator (ASCII)

	Address Content	M	Address resolved by server (UNICODE)
	&&	2	Separator (ASCII)
	Phone Number	21	Request packet number by transmitted by server ((ASCII)
	##	2	Separator (ASCII)
Serial Number		2	Serial number of data sent later at each time will be automatically added '1'.
Error Check		2	Serial Number (including "Packet Length" and "Information Serial Number"), are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit		2	Fixed value: 0x0D0x0A

Example: 79 79 00 BB 97 00 B5 00 00 00 01 41 44 44 52 45 53 53 26 26 00 4A 00 4D 00 30 00 31 00 2D 00 38 00 39 00 37 00 33 00 31 00 3A 00 53 00 4F 00 53 00 20 00 61 00 6C 00 61 00 72 00 6D 00 2E 00 68 00 74 00 74 00 70 00 3A 00 2F 00 2F 00 6D 00 61 00 70 00 73 00 2E 00 67 00 6F 00 6F 00 67 00 6C 00 65 00 2E 00 63 00 6F 00 6D 00 2F 00 6D 00 61 00 70 00 73 00 3F 00 71 00 3D 00 4E 00 32 00 32 00 2E 00 35 00 37 00 33 00 35 00 36 00 2C 00 45 00 31 00 31 00 33 00 2E 00 39 00 32 00 31 00 37 00 31 26 26 38 36 31 33 34 32 31 36 33 32 36 39 39 00 00 00 00 00 00 00 00 23 23 00 16 8E A5 0D 0A

6 LBS Address Request Packet

Description:

- a) Users send address request command to terminal first, then terminal will send address request packet to server for address resolution.
- b) Terminal forwards the resolved address to user.

6.1 Terminal Address Request Packet

		Length	Description
Start Bit		2	0x78 0x78
Packet Length		1	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number		1	0x17
Information Content	MCC	6	Year (1byte) Month (1byte) Day (1byte) Hour (1byte) Min (1byte) Second (1byte) (converted to a decimal) (Date Time)
	MNC	2	Mobile Country Code
	LAC	1	Mobile Network Code(MNC)
	Cell ID	2	Mobile Network Code(MNC)
	Phone Number	3	Cell Tower ID(Cell ID)
	Alarm/Language	2	latter bit 0x01 Chinese 0x02 English
Serial Number		2	Serial number of data sent later at each time will be automatically added '1'.
Error Check		2	Serial Number (including "Packet Length" and "Information Serial Number") , are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit		2	Fixed value:0x0D 0x0A

Example: 78 78 24 17 01 CC 00 28 7D 00 1F 71 31 32 35 32 30 31 33 35 33 32 31 37 37 30 37 39 00 00 00 00 00 01 00 2A 7D D6 0D 0A

6.2 Chinese response of server address request packet

		Length	Description
Start Bit		2	0x78 0x78
Packet Length		1	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number		1	0x17
Information Content	Length of Command	1	Server Flag Bit + Length of Command Content
	Server Flag Bit	4	It is reserved to the identification of the server.
	ADDRESS	8	Address request code mark (ASCII)
	&&	2	Separator (ASCII)
	Address	M	Address resolved by server (UNICODE)

	Content		
	&&	2	Separator (ASCII)
	Phone Number	21	Request packet number by transmitted by server (ASCII)
	##	2	Separator (ASCII)
Serial Number		2	Serial number of data sent later at each time will be automatically added '1'.
Error Check		2	Serial Number (including "Packet Length" and "Information Serial Number"), are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit		2	Fixed value: 0x0D0x0A

Example: 78 78 6E 17 68 00 00 00 01 41 44 44 52 45 53 53 26 26 4F 4D 7F 6E 00 3A 5E 7F 4E 1C 77 01 00 2E 60 E0 5D DE 5E 02 00 2E 60 E0 57 CE 53 3A 00 2E 4E 91 5C 71 89 7F 8D EF 00 2E 79 BB 60 E0 5D DE 5E 02 5B 66 59 27 65 59 80 B2 7E A6 00 32 00 35 7C 73 00 2E 26 26 38 36 31 33 34 32 31 36 33 32 36 39 39 00 00 00 00 00 00 00 00 23 23 00 16 C1 EC 0D 0A

6.3 English response of server address request packet.

	Length	Description	
Start Bit	2	0x79 0x79	
Length of data bit	2	Length = Protocol Number + Information Content + Information Serial Number + Error Check	
Protocol Number	1	0x97	
Information Content	Length of Command	1	Server Flag Bit + Length of Command Content
	Server Flag Bit	4	Leave for server identification.
	ADDRESS	8	Address request code mark (ASCII)
	&&	2	Separator (ASCII)
	Address Content	M	Address resolved by server (UNICODE)
	&&	2	Separator (ASCII)
	Phone Number	21	Request packet number by transmitted by server (ASCII)
	##	2	Separator (ASCII)
Information Serial Number	2	Serial number of data sent later at each time will be automatically added '1'.	
Check Bit	2	Serial Number (including "Packet Length" and "Information Serial Number"), are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)	
Stop Bit	2	Fixed value:0x0D 0x0A	

Example: 79 79 00 BB 97 00 B5 00 00 00 01 41 44 44 52 45 53 53 26 26 00 4A 00 4D 00 30 00 31 00 2D 00 38 00 39 00 37 00 33 00 31 00 3A 00 53 00 4F 00 53 00 20 00 61 00 6C 00 61 00 72 00 6D 00 2E 00 68 00 74

00 74 00 70 00 3A 00 2F 00 2F 00 6D 00 61 00 70 00 73 00 2E 00 67 00 6F 00 6F 00 67 00 6C 00 65 00 2E 00
63 00 6F 00 6D 00 2F 00 6D 00 61 00 70 00 73 00 3F 00 71 00 3D 00 4E 00 32 00 32 00 2E 00 35 00 37 00 33
00 35 00 36 00 2C 00 45 00 31 00 31 00 33 00 2E 00 39 00 32 00 31 00 37 00 31 26 26 38 36 31 33 34 32 31
36 33 32 36 39 39 00 00 00 00 00 00 23 23 00 16 8E A5 0D 0A

CONCOX

7 Online command

Description:

- a) Use server online command to control terminal to execute task.
- b) Terminal response results to server.

7.1 Online command sent by server

		Length	Description
Start Bit		2	0x78 0x78
Length of data bit		1	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number		1	0x80
Information Content	Length of Command	1	Server flag bit + command content length + language
	Server Flag Bit	4	Leave for server identification. Terminal receives the original data in Binary in response packet
	Command Content	M	Character string replied in ASCII coding. Command content is compatible with SMS command.
Information Serial Number		2	latter bit 0x01 Chinese 0x02 English
Check Bit		2	Serial Number (including “Packet Length” and “Information Serial Number”) , are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit		2	Fixed value:0x0D 0x0A

Example : 78 78 0E 80 08 00 00 00 00 73 6F 73 23 00 01 6D 6A 0D 0A

7.2 Online command replied by terminal (0x21)

Terminal reply (general command)

		Length	Description
Start Bit		2	0x78 0x78
Length of data bit		1	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number		1	0x21
Information Content	Server Flag Bit	4	Leave for server identification. Terminal receives the original data in Binary in response packet
	Content Code	1	0x01 ASCIIcode 0x02 UTF16-BE code.
	Content	M	Data needed to be sent (according to content code format)
Information Serial Number		2	Serial number of data sent later at each time will be automatically added ‘1’.
Check Bit		2	Serial Number (including “Packet Length” and “Information Serial Number”) , are values of CRC-ITU. CRC error occur when the

		received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit	2	Fixed value:0x0D 0x0A

Example: 79 79 00 9D 21 00 00 00 00 01 42 61 74 74 65 72 79 3A 34 2E 31 36 56 2C 4E 4F 52 4D 41 4C 3B 20 47 50 52 53 3A 4C 69 6E 6B 20 55 70 3B 20 47 53 4D 20 53 69 67 6E 61 6C 20 4C 65 76 65 6C 3A 53 74 72 6F 6E 67 3B 20 47 50 53 3A 53 65 61 72 63 68 69 6E 67 20 73 61 74 65 6C 6C 69 74 65 2C 20 53 56 53 20 55 73 65 64 20 69 6E 20 66 69 78 3A 30 28 30 29 2C 20 47 50 53 20 53 69 67 6E 61 6C 20 4C 65 76 65 6C 3A 3B 20 41 43 43 3A 4F 46 46 3B 20 44 65 66 65 6E 73 65 3A 4F 46 46 00 2E 26 DF 0D 0A

CONCOX

8 Time Packet

Description:

8.1.1.1 Used for checking time request sent by terminal to server, avoiding wrong time.

8.1.1.2 Server response right time and format. Time is UTC time.

8.2 Time request sent by terminal

	Length (Byte)	Description
Start Bit	2	0x78 0x78
Packet Length	1	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number	1	0x8A
Serial Number	2	Serial number of data sent later at each time will be automatically added '1'.
Error Check	2	Serial Number (including "Packet Length" and "Information Serial Number"), are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit	2	Fixed value: 0x0D0x0A

Example: 78 78 05 8A 00 06 88 29 0D 0A

8.3 Server response time information

	Length	Description
Start Bit	2	0x78 0x78
Packet Length	1	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number	1	0x8A (UTC)
Information Content Date Time	6	Year (1byte) Month (1byte) Day (1byte) Hour (1byte) Min (1byte) Second (1byte) (converted to a decimal) (Date Time)
Serial Number	2	Serial number of data sent later at each time will be automatically added '1'.
Error Check	2	Serial Number (including "Packet Length" and "Information Serial Number"), are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit	2	Fixed value: 0x0D0x0A

Example: 78 78 0B 8A 0F 0C 1D 00 00 15 00 06 F0 86 0D 0A

9 Information transmission packet

Description:

9.1.1.1 Terminal transmits all types of non-position data.

9.2 Information transmission packet sent by terminal

		Length	Description
Start Bit		2	0x79 0x79
Length of data bit		2	Length = Protocol Number + Information Content + Information Serial Number + Error Check
Protocol Number		1	0x94
Information Content	Information Type (Sub-protocol Number)	1	00 External power voltage 01~03 (custom) 04 terminal status synchronization 05 door statusto add
	Data Content	N	Different information type results in different transmission content. See the following for details.
Information Serial Number		2	Serial number of data sent later at each time will be automatically added '1'.
Check Bit		2	Serial Number (including "Packet Length" and "Information Serial Number"), are values of CRC-ITU. CRC error occur when the received information is calculated, the receiver will ignore and discard the data packet. (See Appendix 1)
Stop Bit		2	Fixed value:0x0D0x0A

Example: 79 79 00 7F 94 04 41 4C 4D 31 3D 43 34 3B 41 4C 4D 32 3D 43 43 3B 41 4C 4D 33 3D 34 43 3B 53 54 41 31 3D 43 30 3B 44 59 44 3D 30 31 3B 53 4F 53 3D 2C 2C 3B 43 45 4E 54 45 52 3D 3B 46 45 4E 43 45 3D 46 65 6E 63 65 2C 4F 4E 2C 30 2C 32 33 2E 31 31 31 38 30 39 2C 31 31 34 2E 34 30 39 32 36 34 2C 34 30 30 2C 49 4E 20 6F 72 20 4F 55 54 2C 30 3B 4D 49 46 49 3D 4D 49 46 49 2C 4F 46 46 00 0A 06 1E 0D 0A

Transmitted information content

When type is 00, the bit transmit external battery. This bit is two-digit hexadecimal value. Hexadecimal value converted to decimal value and divide 100

Example: 0X04,0X9F, 049F converted to decimal is 101183, then divide 100 is 11.83, which means external voltage is 11.83V

When type is 04, the bit transmits information of terminal status synchronization. The bit length extended. Transmission is ASCII code.

Definition of content identifier

Definition	Identifier
Alarm Bit1	ALM1
Alarm Bit 2	ALM2
Alarm Bit 3	ALM3
Status Bit 1	STA1
SOS Number	SOS
Centre Number	CENTER
Fence	FENCE
Fuel/Electricity Cutoff Status	DYD
Mode	MODE

✦ ALM1 Definition (Status)

Bit	Definition	Mark
bit7	Vibration Alarm	1 ON 0 OFF
bit6	Network Alarm	1 ON 0 OFF
bit5	Phone Alarm	1 ON 0 OFF
bit4	SMS Alarm	1 ON 0 OFF
bit3	Displacement Alarm	1 ON 0 OFF
bit2	Network Alarm	1 ON 0 OFF
bit1	Phone Alarm	1 ON 0 OFF
bit0	SMS Alarm	1 ON 0 OFF

✦ ALM2 Definition (Status)

Bit	Definition	Mark
bit7	Low Battery Alarm	1 ON 0 OFF
bit6	Network Alarm	1 ON 0 OFF
bit5	Phone Alarm	1 ON 0 OFF
bit4	SMS Alarm	1 ON 0 OFF
bit3	Low Battery Alarm	1 ON 0 OFF
bit2	Network Alarm	1 ON 0 OFF
bit1	Phone Alarm	1 ON 0 OFF
bit0	SMS Alarm	1 ON 0 OFF

✦ ALM3 Definition (Status)

Bit	Definition	Mark
bit7	Overspeed Alarm	1 ON 0 OFF
bit6	Network Alarm	1 ON 0 OFF
bit5	Phone Alarm	1 ON 0 OFF
bit4	SMS Alarm	1 ON 0 OFF
bit3	Power Off Alarm	1 ON 0 OFF

bit2	Network Alarm	1 ON 0 OFF
bit1	Phone Alarm	1 ON 0 OFF
bit0	SMS Alarm	1 ON 0 OFF

✧ STA1 Definition (Status)

Bit	Definition	Mark
bit7	Arm Status	1 Arm0 Disarm
bit6	Automatically Arm	1 ON 0 OFF
bit5	Manually Arm	1 ON 0 OFF
bit4	Remotely Disarm	1 ON 0 OFF
bit3	To Be Defined	
bit2	To Be Defined	
bit1	Disassembly OFF	1 ON 0 OFF
bit0	Disassembly Alarm Status	1 ON 0 OFF

✧ Fuel/Electricity Status Definition

Bit	Definition	Mark
bit7	Undefined	
bit6	Undefined	
bit5	Undefined	
bit4	Undefined	
bit3	Deferred execution caused by overspeed	1Valid bit 0 Invalid bit
bit2	Deferred execution caused by GPS unlocated	1Valid bit 0 Invalid bit
bit1	Oil/Electricity cutoff	1Valid bit 0 Invalid bit
bit0	Oil/Electricity connection	1Valid bit 0 Invalid bit

- ✧ SOS definition: adopt ASCII to transmit (use “,” to separate if multiple SOS numbers)
- ✧ Center number definition: adopt ASCII to transmit
- ✧ Fence definition: adopt ASCII to transmit
- ✧ Mode: adopt ASCII to transmit(separate parameters by “, ”)

Example : ALM1=FF;ALM2=FF;ALM3=FF;STA1=CO ; DYD=01 ; SOS=12345 , 2345 , 5678 ; CENTER=987654;FENCE=FENCE,ON,0,-22.277120,-113.516763,5,IN,1; MODE=MODE,1,20,500

Notice: Not all contents are transmitted and please parse based on bits. Different products upload different contents.

When type is 05, this bit transmit external IO detection(door checking). Transmission is hexadecimal.

Bit	Definition	Mark
bit7	To Be Defined	
bit6	To Be Defined	
bit5	To Be Defined	
bit4	To Be Defined	
bit3	To Be Defined	

bit2	IO Status	1 High 0 Low
bit1	Triggering Status	1High triggering 0 Low triggering
bit0	Door Status	1 ON 0 OFF

9.3 Server Response Information Transmission Packet

Server no Response

CONCOX


iii. Appendix

- code fragment of the CRC-ITU lookup table algorithm implemented based on C language

```
static constU16crctab16[]=
{
0X0000,0X1189,0X2312,0X329B,0X4624,0X57AD,0X6536,0X74BF,
0X8C48,0X9DC1,0XAF5A,0XBED3,0XCA6C,0XD8E5,0XE97E,0XF8F7,
0X1081,0X0108,0X3393,0X221A,0X56A5,0X472C,0X75B7,0X643E,
0X9CC9,0X8D40,0XBFDB,0XAE52,0XDAED,0XCB64,0XF9FF,0XE876,
0X2102,0X308B,0X0210,0X1399,0X6726,0X76AF,0X4434,0X55BD,
0XAD4A,0XBCC3,0X8E58,0X9FD1,0XEB6E,0XFAE7,0XC87C,0XD9F5,
0X3183,0X200A,0X1291,0X0318,0X77A7,0X662E,0X54B5,0X453C,
0XBDCB,0XAC42,0X9ED9,0X8F50,0XFBF7,0XEA66,0XD8FD,0XC974,
0X4204,0X538D,0X6116,0X709F,0X0420,0X15A9,0X2732,0X36BB,
0XCE4C,0XDFC5,0XED5E,0XFCDF,0X8868,0X99E1,0XAB7A,0XBAF3,
0X5285,0X430C,0X7197,0X601E,0X14A1,0X0528,0X37B3,0X263A,
0XDECD,0XCF44,0XFDDF,0XEC56,0X98E9,0X8960,0XBBFB,0XAA72,
0X6306,0X728F,0X4014,0X519D,0X2522,0X34AB,0X0630,0X17B9,
0XEF4E,0XFEC7,0XCC5C,0XDDD5,0XA96A,0XB8E3,0X8A78,0X9BF1,
0X7387,0X620E,0X5095,0X411C,0X35A3,0X242A,0X16B1,0X0738,
0XFFCF,0XEE46,0XDCDD,0XCD54,0XB9EB,0XA862,0X9AF9,0X8B70,
0X8408,0X9581,0XA71A,0XB693,0XC22C,0XD3A5,0XE13E,0XF0B7,
0X0840,0X19C9,0X2B52,0X3ADB,0X4E64,0X5FED,0X6D76,0X7CFF,
0X9489,0X8500,0XB79B,0XA612,0XD2AD,0XC324,0XF1BF,0XE036,
0X18C1,0X0948,0X3BD3,0X2A5A,0X5EE5,0X4F6C,0X7DF7,0X6C7E,
0XA50A,0XB483,0X8618,0X9791,0XE32E,0XF2A7,0XC03C,0XD1B5,
0X2942,0X38CB,0X0A50,0X1BD9,0X6F66,0X7EEF,0X4C74,0X5DFD,
0XB58B,0XA402,0X9699,0X8710,0XF3AF,0XE226,0XD0BD,0XC134,
0X39C3,0X284A,0X1AD1,0X0B58,0X7FE7,0X6E6E,0X5CF5,0X4D7C,
0XC60C,0XD785,0XE51E,0XF497,0X8028,0X91A1,0XA33A,0XB2B3,
0X4A44,0X5BCD,0X6956,0X78DF,0X0C60,0X1DE9,0X2F72,0X3EFB,
0XD68D,0XC704,0XF59F,0XE416,0X90A9,0X8120,0XB3BB,0XA232,
0X5AC5,0X4B4C,0X79D7,0X685E,0X1CE1,0X0D68,0X3FF3,0X2E7A,
0XE70E,0XF687,0XC41C,0XD595,0XA12A,0XB0A3,0X8238,0X93B1,
0X6B46,0X7ACF,0X4854,0X59DD,0X2D62,0X3CEB,0X0E70,0X1FF9,
0XF78F,0XE606,0XD49D,0XC514,0XB1AB,0XA022,0X92B9,0X8330,
0X7BC7,0X6A4E,0X58D5,0X495C,0X3DE3,0X2C6A,0X1EF1,0X0F78,
};

//calculate the 16-bit CRC of data with predetermined length.
U16GetCrc16(constU8*pData,intnLength)
{
U16fcs=0xffff;//initialization
while(nLength>0){
fcs=(fcs>>8)^crctab16[(fcs^*pData)&0xff];
nLength--;
pData++;
}
return~fcs;//negated
}
```

2. Data Flow Diagram

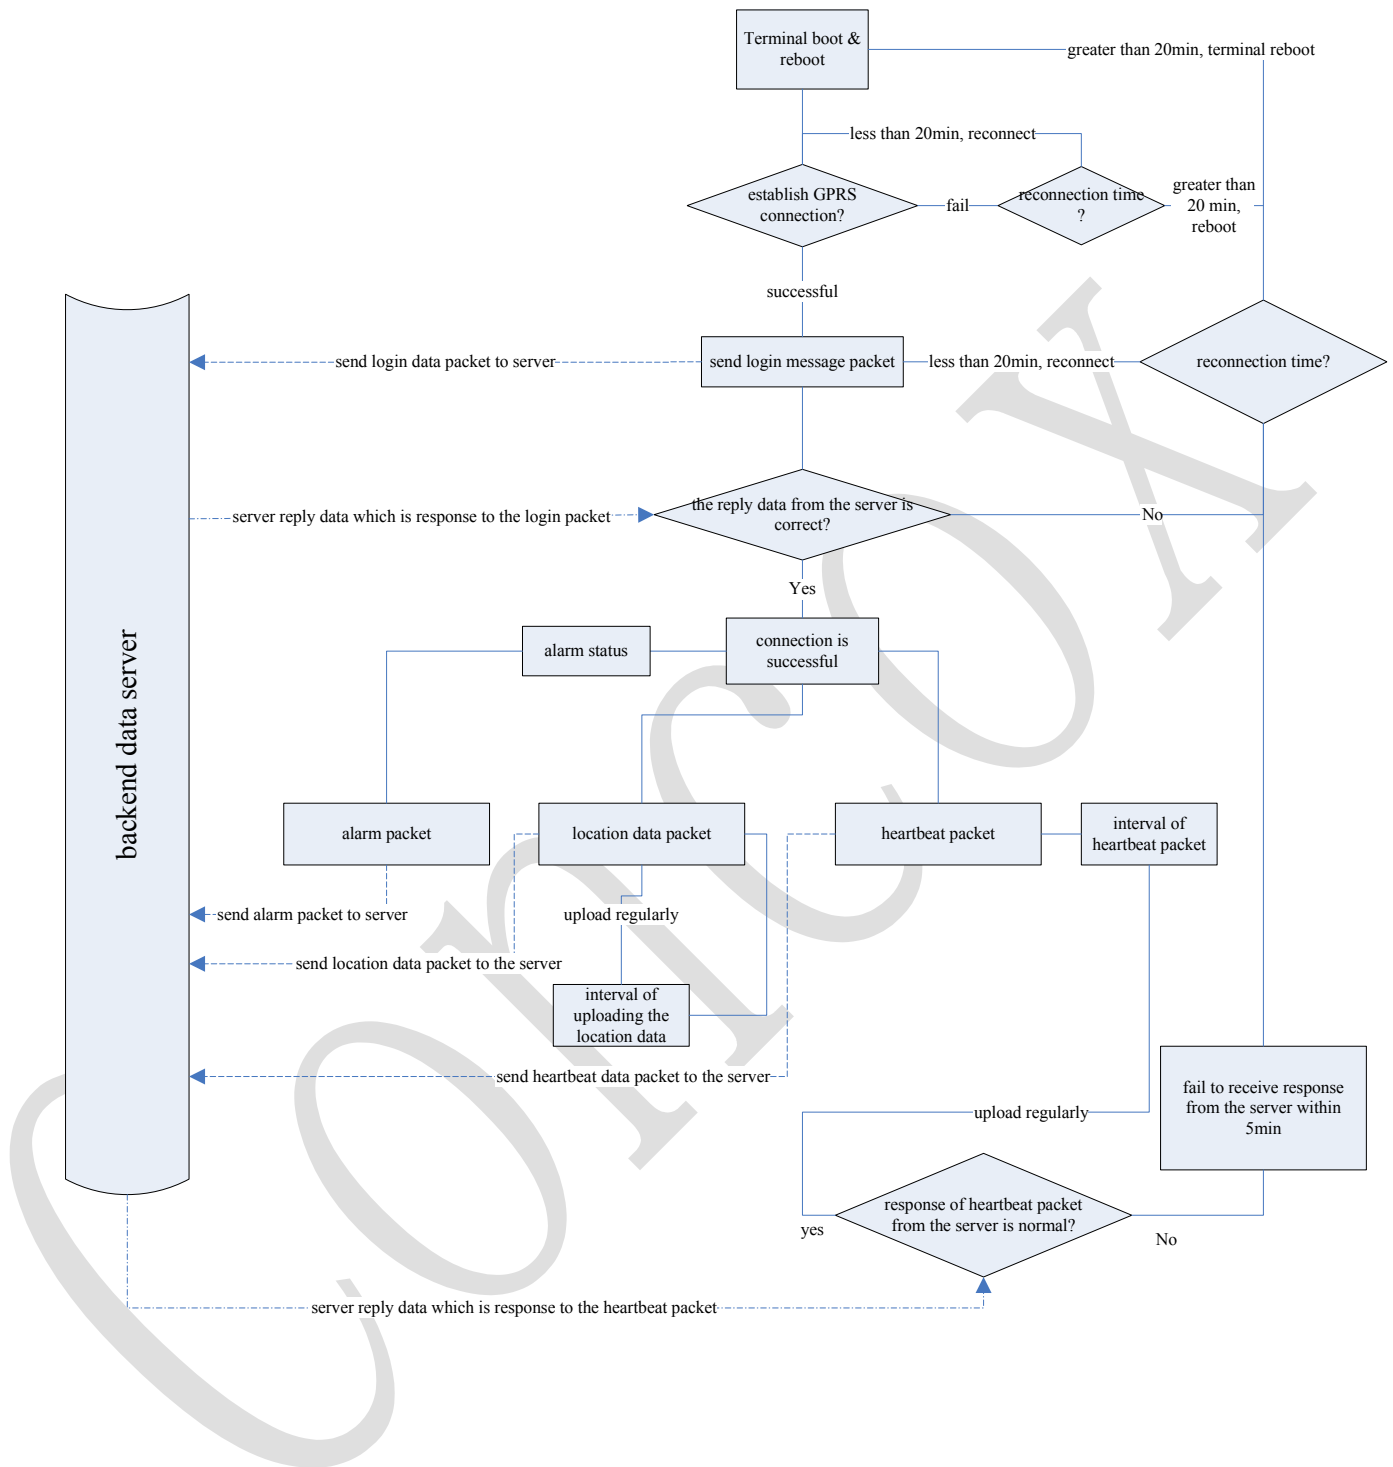

3. Voltage-Battery Correspondence of Heartbeat Packet (GT710、GT700)

Battery Percentage (/%)	
100%	More than 2.95
95%	2.93
85%	2.92
75%	2.91
65%	2.90
55%	2.89
45%	2.88
40%	2.86
35%	2.84
30%	2.81
25%	2.78
20%	2.74
15%	2.69
10%	2.62
5%	2.52
0%	Below 2.06