

Technical Bulletin

Date

26/8/2011

Reference Number

235

- Urgent
 Recommended
 Information Only



MUSIC Group Research UK Limited,
Klark Industrial Park,
Walter Nash Road,
Kidderminster.
Worcestershire,
DY11 7HJ.
England.

Switchboard: +44 1562 741515
Fax: +44 1562 745371

www.midasconsoles.com | www.klarktechnik.com | www.ktsquareone.com

Brand	Product	Serial Number
Midas	VeniceF	N/A

Assembly

Mono Input Main Board

Subject

Modification of the Direct Output of the VeniceF Mono Input Channels from Post EQ Pre Fader to Post Fader

This modification must be carried out by an authorised service centre failure to do so may invalidate the warranty.

As default the Mono channel direct output source can be selected as follows via the front panel switch:

- 1 - Pre EQ
- 2- Post EQ Pre Fader

Option 2 can be changed to Post EQ - Post Fader by de-soldering an internal resistor link and re-soldering a new link into the new component positions shown below

Input Channel	Post EQ - Pre Fader Resistor Link	Post Fader Resistor Link
CH1	R1143 (fitted as Default)	R1144
CH2	R2143 (fitted as Default)	R2144
CH3	R3143 (fitted as Default)	R3144
CH4	R4143 (fitted as Default)	R4144
CH5	R5143 (fitted as Default)	R5144
CH6	R6143 (fitted as Default)	R6144
CH7	R7143 (fitted as Default)	R7144
CH8	R8143 (fitted as Default)	R8144

Distributed To:

All Distributors

Date


26/08/2011

Fit security label here.



REV 1 VN201A MONO INPUT PCX-VN201A-B

- ICT
- FT
- FP

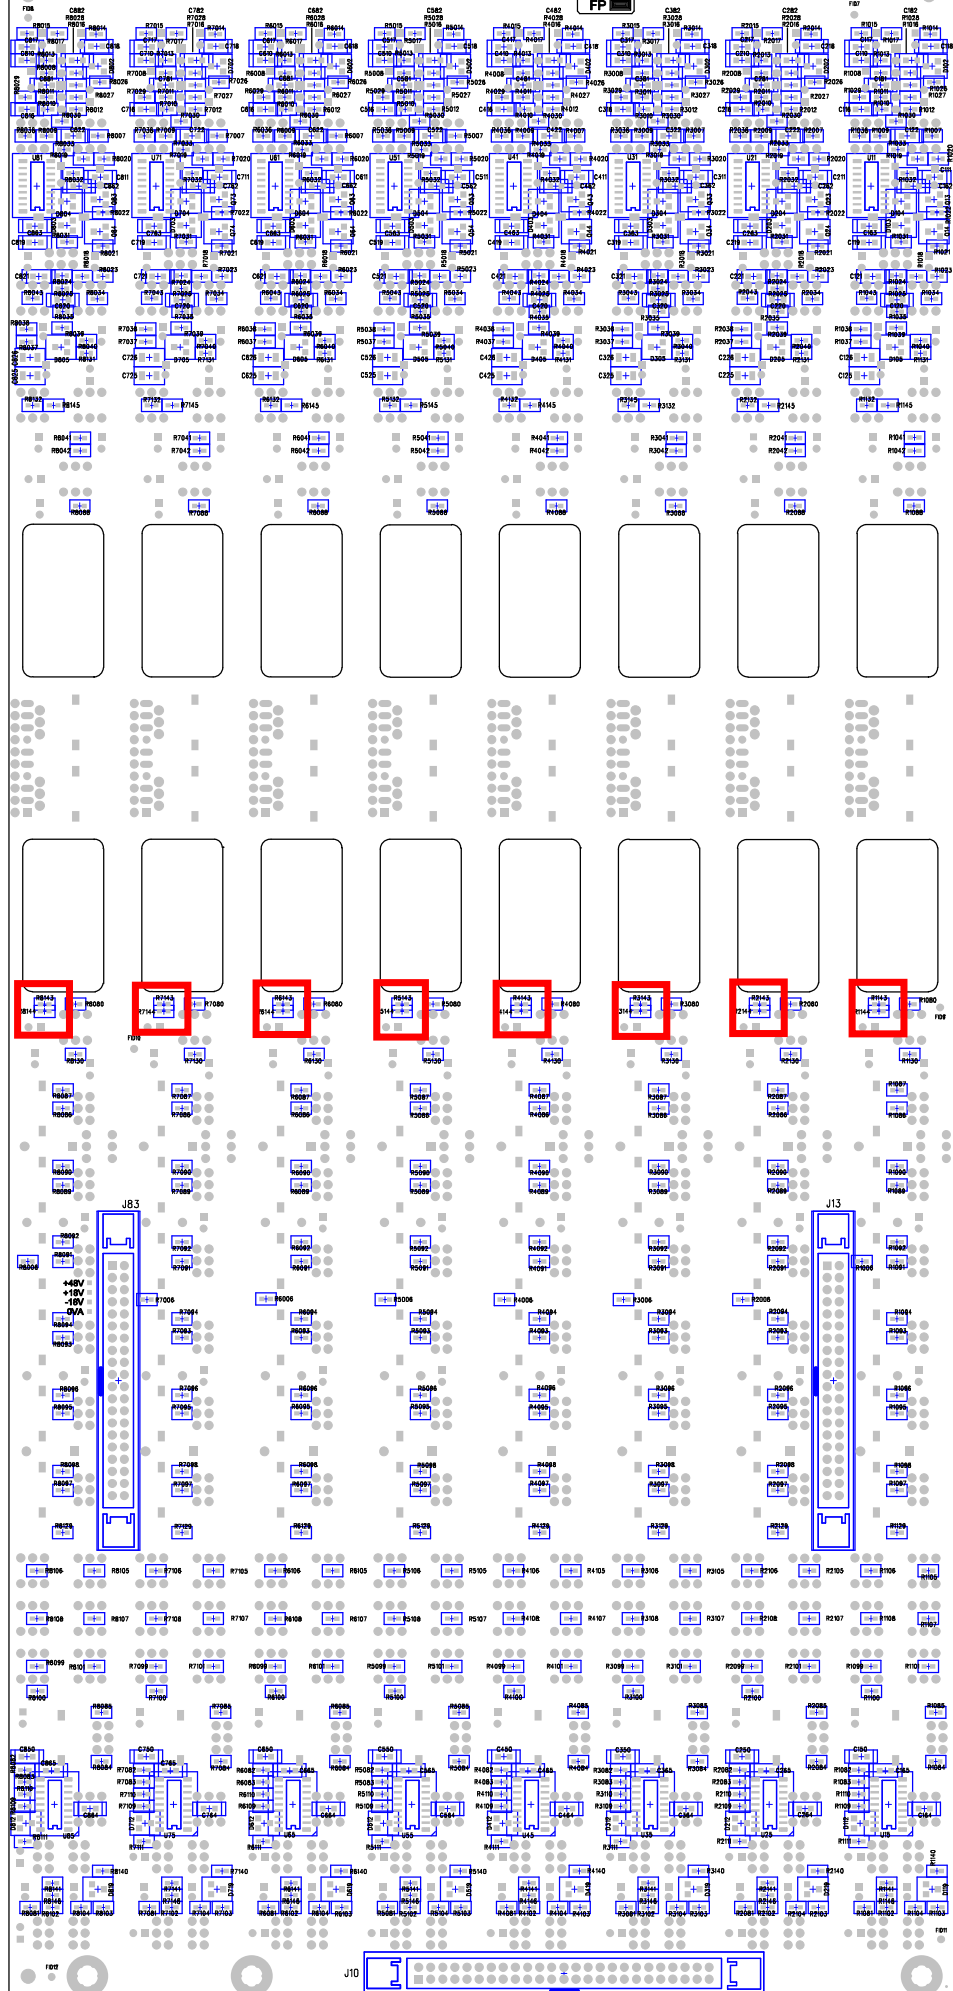

Fit security label here.



VN213A STEREO INPUT / MASTER
PCX-VN213A-D

MIDAS