





# THE NEW SUPERIOR PENTHEON SERIES UNRESTRAINED PERFORMANCE FOR YOUR MISSION.

All around the world first responders work in the most extreme conditions to save people's lives. They are faced with different challenges every day, all requiring quick decision making and solid teamwork. Working under pressure, in a race against the clock, first responders need equipment they can fully rely on. It is for these men and women that we have developed our new Pentheon Series: High-tech rescue tools that are miles ahead of all other equipment on the market, cordless and hose tools alike.

Only the Holmatro Pentheon Series offers you the unrestrained performance, unparalleled speed and ultimate control you've never experienced before!




- CUTTER PCU50 -

- TELESCOPIC RAM PTR50 -

- COMBI TOOL PCT50 -

- SPREADER PSP40 -









Pentheon tools are the fastest rescue tools on the market. A revolutionary mechatronic system inside the tools continuously optimizes the motor and pump settings, to deliver a maximized oil flow over the full pressure range. This provides you, as a rescuer, with unparalleled tool speed at any load.

Where all other rescue tools show a significant decrease in speed when switching to another stage to deal with higher loads, Holmatro Pentheon tools stick to the ideal stepless speed curve.



**UNPARALLELED TOOL SPEED AT ANY LOAD** 







## MAXIMUM ENDURANCE EXTENDED WORKING TIME

Holmatro Pentheon tools help you get more work done without swapping batteries. These are the reasons why.

### PURPOSE-BUILT BATTERY WITH INCREASED CAPACITY

Specially developed to power our high-performance Pentheon tools, this battery contains extra large and powerful cells. Thanks to the bigger cell volume, it heats up much slower than regular batteries. This means you can complete more work, while using its maximum power.

### **ENERGY EFFICIENT DRIVE TECHNOLOGY**

The patented mechatronic system that controls the motor and pump settings of our Pentheon tools is extremely energy efficient. Especially when compared to the drive technology used in other cordless rescue tools. All with the aim to extend your working time.

### AUTO START/STOP FUNCTION: NO ENERGY WASTE

When the tool is not operated or has reached its maximum pressure, the motor stops automatically. This saves valuable battery capacity. Simply turn the control handle to restart the tool.





## USER CENTERED DESIGN BATTERY MANAGEMENT **MADE EASY**

What if battery management could be made as simple as just plugging it in? Well, that's exactly what we have done!

### **ON-TOOL CHARGING**

Stop swapping batteries! From now on you can charge the battery while it's still on the tool. Simply connect the tool to the charger and the whole charging process will regulate itself. The battery on the tool always has priority over the one on the charger, which will resume charging when the battery on the tool is 100% full. You can connect up to 3 chargers to be powered from a single outlet. This allows you to charge 6 batteries without any management.

### MAGNETIC CONNECTOR

Easy connection and no disconnection required: Our On-Tool Charging Cord allows you to grab a tool and walk away with it. Thanks to the cord's magnetic connector the tool releases itself.



### REALTIME DIAGNOSTICS

LED indicators on the battery and the charger give you instant feedback on the battery's temperature, state of charge and state of health. For more detailed battery information you can use our diagnostics software. A more extensive version of this software is available for authorized Holmatro (Dealer) Service Technicians. It combines in-depth tool diagnostics with integrated inspection procedures, to provide the best service for your Pentheon tools. Holmatro has special accessories available to connect the Pentheon tools and batteries to your laptop or pc.



## USER CENTERED DESIGN COMPACT & INLINE TOOL DESIGN

Compact rescue tools are easier to handle and save space in your rescue truck. This is how we have managed to limit the dimensions of our high-performance Pentheon tools.

holmatro †


### COMPACT INTEGRATED MOTOR & PUMP

Inside the tools the electric motor and the hydraulic pump share the same shaft. This saves a lot of space.



### BATTERY INTEGRATED IN TOOL DESIGN

The battery has a semi-circle shape which makes it fit around the tool like a bracelet. This also contributes to the slim design of our Pentheon tools.



# USER CENTERED DESIGN EASE OF USE

At Holmatro we design rescue tools with the end user in the first, second and third place. Some examples:

### LED LIGHTS POWERED FROM MAIN BATTERY

Six high-output LED lights in the carrying handle illuminate your working area at night and neutralize annoying shadows during the day. They are powered from the main battery, which means they automatically switch on and off together with the tool. If desired, the lights can be switched off separately by pressing a button on the tool. But don't bother: their power consumption is next to nothing!





### 360° CARRYING HANDLE

With a carrying handle that goes all around the tool, you can hold the tool in any position. It also includes a suitcase grip for easy and well-balanced carrying. The handle is made of a damage-proof high-grade synthetic polymer. This extremely tough and elastic material has the unique property of always returning to its original shape.



Centrally positioned on the back of the tool, our control handle is always within reach. This allows for easy tool operation at all sides of the car and in any position.











## **ADDITIONAL FEATURES CUTTER**

### 30° INCLINED BLADES

The angled jaw of our Pentheon Inclined Cutter offers you improved ergonomics when cutting high or low on the car. It allows you to operate the tool from a comfortable waist height. The inclined blade design also results in more space between the tool and the car, where your patient is located. For you, as a rescuer, this means easier and safer cutting.

### NEW CAR TECHNOLOGY BLADE DESIGN


These U-shaped blades pull even the strongest car materials into the cutting recess, close to the central bolt, where they are cut at the highest possible force. For a superior cutting performance on the latest vehicle models.

### OPTIMIZED CUTTING EDGE

Designed to withstand wear and damage even better. For a longer blade life and a superior cutting performance.

### I-BOLT

The i-Bolt has a flat central bolt design without a blade holder in between. It presses the blades together directly and more firmly. This minimizes blade separation and maximizes cutting performance. The flat design also allows for better access into narrow spaces.

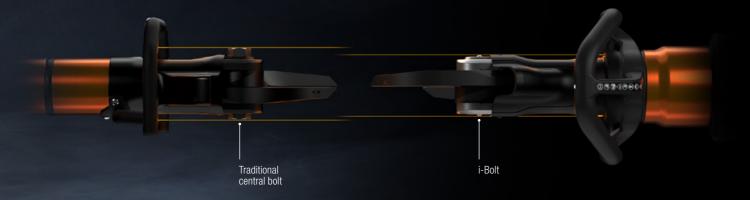



# SPECIFICATIONS CUTTER PCU50



Article number	151.000.684
Battery included	no
Max. cutting opening	182 mm
Theoretical cutting force	1389 / 141.6 (kN/t)
Round bar (S235 acc. to EN 13204)	41 mm
Protection rate	IP57
Weight excl. battery	20 kg
Weight, ready for use (incl. battery)	21.5 kg
Dimensions (L x W x H)	892 x 270 x 274 mm
EN 13204 classification	BC165K-21.5
EN 13204, cutting capacity	1K 2K 3K 4K 5K
NFPA 1936, cutting capacity	A8 B8 C7 D9 E9





## ADDITIONAL FEATURES SPREADER

### **NEW EXTREME GRIP SPREADER TIPS**

Unique design with pointed teeth at both sides that bite into the material. The middle row of teeth on the inside of the tips is taller and offers instant grip. The teeth on the outside alternately point in the opposite direction, to prevent the spreader from slipping away. This allows for a superior grip over the full spreading range. Finally, the interlocking profile results in smaller insertion dimensions.







# **SPECIFICATIONS SPREADER PSP40**



Article number	151.000.685
Battery included	no
Spreading distance	725 mm
Min. spreading force (EN 13204)	43 / 4.4 (kN/t)
Max. spreading force	280 / 28.6 (kN/t)
Max. pulling force	51.7 / 5.3 (kN/t)
Max. squeezing force	59 / 6 (kN/t)
Protection rate	IP57
Weight excl. battery	17.9 kg
Weight, ready for use (incl. battery)	19.4 kg
Dimensions (L x W x H)	956 x 270 x 276 mm
EN 13204 classification	AS43/725-19.4
NFPA 1936, HPF	51.7 / 5.3 (kN/t)
NFPA 1936, HSF	69.2 / 7.1 (kN/t)
NFPA 1936, LPF	27 / 2.8 (kN/t)
NFPA 1936, LSF	39.1 / 4 (kN/t)





# **TELESCOPIC SMART RAM EXTENSION** Now you only need one compact ram for all applications, including cross

ramming from one side of the car to the other. Simply connect the optional extension pipe to bridge a gap of up to 1804 mm / 71 inches. The ram will automatically adapt its force to the new maximum length that can be achieved. All to make sure you can keep working safely.









Integrated in the ram head, the laser pointer marks the exact spot where the ram will touch the car construction. It helps you position the tool first time right, which saves time and is safer for the patient. If you would need to retract the ram to reposition it, the car construction could spring back and re-entrap your patient. The laser pointer can help you avoid this risk.



### **DOUBLE CARRYING HANDLE**

Our Pentheon ram has a double carrying handle for easy tool placement at both sides of the car. It also makes it easier to hold the ram inside the car, where space is limited. The double handle is made of a damage-proof high-grade synthetic polymer. This extremely tough and elastic material has the unique property of always returning to its original shape.

### CROSS RAM SUPPORT SET (ACCESSORY)

Specially developed to distribute the force of the ram over a larger area, our Cross Ram Support Set provides a solid platform for cross ramming. It prevents the ram from pushing through car interior surfaces, which would make it lose its effectiveness. Equipped with grip teeth for maximum hold.





# **SPECIFICATIONS TELESCOPIC RAM PTR50**



Article number	151.000.678
Battery included	no
Extended length	1365 mm
Extended length incl. optional extension pipe	1804 mm
Retracted length	578 mm
Total spreading stroke	787 mm
Spreading stroke 1st plunger	405 mm
Max. spreading force 1st plunger	136 / 13.9 (kN/t)
Spreading stroke 2nd plunger	382 mm
Max. spreading force 2nd plunger	65 / 6.6 (kN/t)
Protection rate	IP57
Weight excl. battery	18.4 kg
Weight, ready for use (incl. battery)	19.9 kg
Dimensions (L x W x H)	578 x 256 x 443 mm
EN 13204 classification	TR136/405-65/382-19.9
NFPA 1936, HSF	136 / 13.9 (kN/t)
NFPA 1936, LSF	65 / 6.6 (kN/t)












### REMOVABLE TIPS

The combi tool tips, which are specifically designed for spreading and squeezing, can be easily removed by hand. This allows you to cut material without crushing it.

### I-B0LT

Holmatro invented the i-Bolt to minimize blade separation and maximize cutting performance. It presses the blades together directly (no blade holder in between!) and more thightly. This eliminates the need to tighten the central bolt after each tool use. Finally, the i-Bolt has a flat design for better access into narrow spaces.

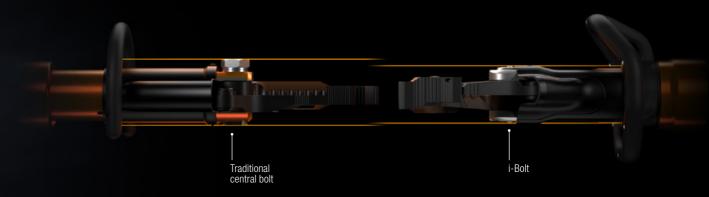

# **SPECIFICATIONS COMBI TOOL PCT50**



Article number	151.000.529
Battery included	no
Spreading distance	380 mm
Min. spreading force (EN 13204)	43 / 4.4 (kN/t)
Max. spreading force	1860 / 189.7 (kN/t)
Max. cutting opening	320 mm
Theoretical cutting force	670 / 68.3 (kN/t)
Round bar (S235 acc. to EN 13204)	36 mm
Max. pulling force	104 / 10.6 (kN/t)
Max. squeezing force	87 / 8.9 (kN/t)
Protection rate	IP57
Weight excl. battery	18.8 kg
Weight, ready for use (incl. battery)	20.3 kg
Dimensions (L x W x H)	898 x 268 x 273 mm
EN 13204 classification	CK43/380J-20.3
EN 13204, cutting capacity	1J 2J 3K 4K 5K
NFPA 1936, cutting capacity	A7 B8 C8 D8 E8
NFPA 1936, HPF	104 / 10.6 (kN/t)
NFPA 1936, LPF	79.7 / 8.1 (kN/t)
NFPA 1936, HSF	42.5 / 4.3 (kN/t)
NFPA 1936, LSF	32.9 / 3.4 (kN/t)





# DENTHEON ACCESSORIES

### FOR ALL MODELS



Battery PBPA287

Battery PBPA287 (for all models)	
Article number	151.000.583
Battery type	Li-lon
Capacity	7 Ah
Energy	176 Wh
Voltage	28 VDC
Protection rate	IP67



Battery Charger PBCH...

Required accessories (for all models)	Article number
Battery Charger PBCH1 (AC-EU)	151.000.629
Battery Charger PBCH2 (AC-US)	151.000.742
Battery Charger PBCH3 (DC)	151.000.632
Battery Charger PBCH4 (AC-JP)	151.000.630
Battery Charger PBCH5 (AC-UK	151.000.631
Battery Charger PBCH6 (AC-KR)	151.001.209
Battery Charger PBCH7 (AC-CN)	151.001.518
Battery Charger PBCH8 (AC-IN)	151.001.519


### FOR ALL MODELS



Mains Power Connector PMC...




On-Tool Charging Cord POTC1






Battery Diagnostic Tool PBDT1

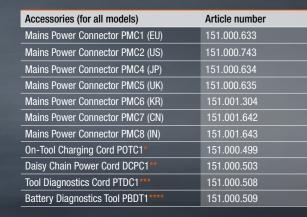

- On-Tool Charging Cord POTC1; Cable to connect a Pentheon tool to the charger for the purpose of on-tool battery charging. The battery on the tool has priority over the battery on the charger.
- Daisy Chain Power Cord DCPC1; Cable to connect 2 battery chargers. Up to 3 chargers can be connected to each other and powered from one outlet.



Daisy Chain Power Cord DCPC1



Tool Diagnostic Cord PTDC1

- \*\*\* Tool Diagnostic Cord PTDC1; Cable to connect a Pentheon tool, or the Battery Diagnostic Tool, to a laptop or pc. Holmatro has developed special software for battery and tool diagnostics.
- \*\*\* Battery Diagnostic Tool PBDT1; To be used with Tool Diagnostic Cord PTDC1.



Accessory Set In Case ACS 02



Pulling Attachment Set PAS 02

Accessories PSP40	Article number
Accessory Set In Case ACS 02	150.182.288
Pulling Attachment Set PAS 02	150.182.274
Cutting Tip Set CTS 01	150.006.474
Spreading Tip Set STS 02	150.006.475
Pulling Chains Set In Case PCS 02	150.582.021
Pulling Chains Set PCS 01	150.582.152



Cutting Tip Set CTS 01



Spreading Tip Set STS 02



Pulling Chains Set In Case PCS 02



Pulling Chains Set PCS 01

### PTR50



Extension Pipe TRE03



Cross Ram Support Set XRS01




Ram Support HRS 22 NCT



Ram Support HRS 22

Accessories PTR50	Article number
Extension Pipe TRE03, length: 439 mm	151.000.804
Cross Ram Support Set XRS01	151.001.164
Ram Support HRS 22 NCT	150.003.105
Ram Support HRS 22	150.181.011





Spreading Tip Set STS 04

Pulling Chains Set PCS 03



Pulling Attachment Set PAS 07



Accessory Set In Case ACS 04




Pulling Chains Set In Case PCS 04



150.582.261

Pulling Chains Set PCS 03







With two high-tech production plants in the Netherlands and the USA, the strictest quality, safety and performance standards in the market and a history of groundbreaking product innovations, Holmatro is the world's leading rescue tool supplier. We are very proud to see that Holmatro tools are the first choice of many fire & rescue professionals around the globe.

## **PLUNGER RAM**

First ram with twin plungers. Designed to double the spreading distance without the risk of a plunger bending.



## **TECHNOLOGY**

The world's first single hose / single coupler system. A turning point in rescue tool technology, making rescue procedures safer, quicker and easier.



First cutter with a 30-degree angled jaw, improving user comfort and maximizing working space.



**INCLINED CUTTING** 

2 2003 2004 <mark>2005</mark> 2006 2007 2008 2009 2010 2011 2012 2013 2014 <mark>2015</mark> 2016 2017 2018 2019 <mark>2020</mark> 2021 2022 <mark>93</mark> 1994 1995 1996 1997 1998 1999 2000 2001 **2** 1968 1969 1970 1971 1972 1973 1974 <mark>1975</mark> 1976 1977 1978 1979 1980 1981 1982 1983 <mark>1984</mark> 1985 1986 1987 1988 1989 1990 1991 1992 <mark>1</mark>8



## **WORKING PRESSURE**

First hydraulic rescue tools operating at a pressure higher than 500 bar. The birth of lighter and more compact rescue equipment.

## **POWER PUMP**

The first lightweight, mobile rescue pump enabling one man to carry a full set of tool, pump and hoses on his own.



### **CUTTERS**

First cutter with U-shaped NCT (New Car Technology) blades, specially designed to cut new car construction.



First high-performance batterypowered rescue tools. Easy to carry and handle thanks to a low weight (< 15 kg incl. battery).



## **SERIES**

Unparalelled speed, ultimate control and the unrestrained performance to keep working in all circumstances. Miles ahead of all





### YOU CAN COUNT ON US, FOR LIFE

### holmatro.com

- f Holmatro Rescue World
- @HolmatroRescue
- o holmatrorescue
- HolmatroRescue

**Disclaimer** - While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete Holmatro B.V. and its affiliated companies (here-after: Holmatro) cannot be held liable in any way for the consequences of activities undertaken based on this printed matter. If you have any doubts about the correctness or completeness of the information, please contact Holmatro (phone number