



永胜粮油机械

Yongsheng machinery



中国·河北
HEBEI · CHINA

定州市永胜粮油机械有限公司
Dingzhou Yongsheng Grain and Oil Machinery Co.,Ltd



定州市永胜粮油机械有限公司
DINGZHOU YONGSHENG GRAIN & OIL MACHINERY CO., LTD



Yongsheng Machinery



不断创新，再创新的辉煌!!



定州市永胜粮油机械有限公司
DINGZHOU YONGSHENG GRAIN & OIL MACHINERY CO., LTD



About Us

企业概况

定州市永胜粮油机械有限公司是一家集科研、设计、生产、销售为一体的专业油脂设备企业。我公司拥有一流的油脂设备生产基地，专业的油脂技术工程师和专家，先进的生产技术和精密的设备。所有的油脂设备以及配件都为自主生产。整套先进的油脂设备，均由我公司与国内科研机构，专业院校共同开发。先进的制油技术适用于各大，中，小型油厂。我司所生产设备，从原料清理，预处理，浸出，精炼以及副产品加工（例如磷脂工程，蛋白质工程）都是设计和生产的先驱，40年来，为广大用户创造出可观的经济和社会价值。

公司近年来的油脂设备，已经在市场投放数百台套，得到了国内与海外的共同认可，我公司拥有数百次的油脂设备成套工程的设计，制作，安装调试经验，并且可根据用户的要求进行设计生产。本着创新生产理念，迅猛发展成为中国粮油机械生产和出口的企业，公司产品已出口到俄罗斯，印度，尼泊尔，印度尼西亚，南非，坦桑尼亚，埃塞俄比亚，乌克兰，哈萨克斯坦，巴基斯坦，伊朗，朝鲜，越南，法国和欧盟等30多个国家。

DingZhou YongSheng Grain and Oil Machinery Co., LTD is a professional company combining research and development design, production and sales as a whole. The company has first-class oil equipment manufacturing base, professional oil technology engineer and professor, possesses advanced production technology and sophisticated equipment, All grease equipment and spare parts are produced independently. The whole set of advanced grease equipment, all by my company and the domestic research institutions, professional colleges and universities to develop. Oil advanced technology is suitable for large and small refineries. Advanced technology, suitable for making all kinds of plant oil. From the raw material of cleaning up, prepressing, leaching, refining and the production processing of by-product (such as Phospholipids engineering, protein engineering), is totally a dragon design and production, has created considerable economic benefit and social benefit for the user and society more than 40 years.

In recent years of oil equipment in the company has in the market put hundreds of sets, has been the common recognition of domestic and overseas, our company have hundreds of oil equipment engineering design, production, installation and debugging experience, and according to the design and production requirements of the users.

YongSheng company with scientific management method, strives for perfection the manufacturing process, innovative manufacturing idea, fast grows and become the grain and oil machinery production and export base in China. Company products are exported to Russia, India, Nepal, Indonesia, South Africa, Tanzania, Ethiopia, Ukraine, kazakhstan, Pakistan, Iran, north Korea, Vietnam, France and the European Union and so on more than 30 countries and area.





定州市永胜粮油机械有限公司
DINGZHOU YONGSHENG GRAIN & OIL MACHINERY CO., LTD

We are professional



Export
packing



Company
Achievement

我们的业绩





定州市永胜粮油机械有限公司
DINGZHOU YONGSHENG GRAIN & OIL MACHINERY CO., LTD

Welcome to our factory .
欢迎新老客户莅临指导我们的工作。





定州市永胜粮油机械有限公司
DINGZHOU YONGSHENG GRAIN & OIL MACHINERY CO., LTD

Oil seed material 油料作物样品展示

SHOW

cottonseed

棉籽



peanut

花生



soybean

大豆



tea seed

油茶



sunflower
seed

油葵



safflower seeds

红花籽



sesame

芝麻



corn germ

玉米



coconut

椰子



palm

棕榈



Hemp seed

麻籽



Cashew nut shell

腰果壳





定州市永胜粮油机械有限公司
DINGZHOU YONGSHENG GRAIN & OIL MACHINERY CO., LTD



Screw oil press machine is a screw-driven oil making machine that used to extract oil from seeds and kernels for edible or biofuel purposes.

Our oil press machines can process a great many plant seed such as peanut, soybean, sunflower seeds, sesame seed, cottonseed, rapeseeds, corn germ, coconut, palm kernel, hemp seed etc.

螺旋榨油机是一种螺杆驱动的榨油机，用于从种子和植物果仁中提取油脂，用于食用或生物燃料用途。

我们的榨油机可以处理大量的植物种子，如花生、大豆、葵花籽、芝麻、棉籽、菜籽、玉米、椰子、棕榈、麻籽等。





剥壳机/脱壳机 Disc decorticator/Hulling Machine

技术参数：
Technical Parameter:

圆盘剥壳机又称牙板剥壳机，使用范围很广，通常用于棉籽的剥壳，也可用于其他油料作物，如花生果、油桐等油料的剥壳，也可用作破碎各种油料和已粗碎后的油饼。圆盘剥壳机是利用粗糙表面的搓碎作用使油料皮壳破碎。其特点是结构简单，调整使用方便。

Disc decorticator, also named tooth plate decorticator, With wider range of application. It is widely used for the husking of cottonseed, also can be used for other oil plants' (oil sunflowers, peanut, soybean) broken work. The principle for this is to make use of the grated effect of the tooth plate's surface, then make the oil material kernel open.

型号	Model BKY · 71	Model BKY · 91	Model BKY · 127	Model BKY · 128
磨片直径 毫米 Cutting disc diameter	710 mm	910 mm	1270 mm	1280 mm
生产能力 吨/天 Production capacity	35 t/d	50-60 t/d	80-150 t/d	100-170 t/d
主轴速度 Speed of main shaft	1200 r/min	910 r/min	840-880 r/min	840-880 r/min
电机功率 Motor power	4Level 18.5 kw	4Level 30 kw	4Level 45 kw	4Level 45 kw
尺寸大小 Dimension	1820×940×1382	2160×1200×1632	2400×1620×1980	2400×1620×1980
重量 Weight	1100 kg	1700 kg	2600 kg	2600 kg






立式振动过滤机 Vertical vibration filter

自动排渣过滤机是把花生油、大豆油、菜籽油等食用油；柴油、汽油、润滑油等工业用油行业生产工艺中用于脱去颜色的白土或活性炭脱色剂分离出来的一款精密高效过滤设备。

Automatic deslagging filter is the edible oil, peanut oil, soybean oil, rapeseed oil, diesel, gasoline, lubricants and industrial oil industry in the production process used to remove color clay or activated carbon decolorizing agent isolated a precise and efficient filtration equipment.

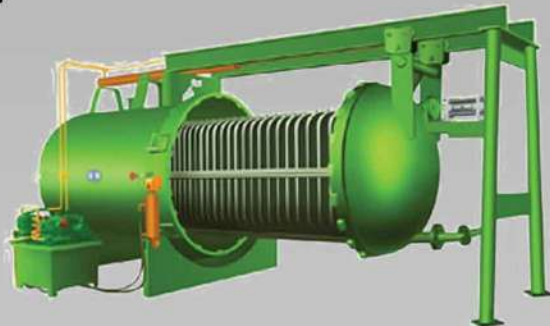

	NYB-12	NYB-15	NYB-20	NYB-25	NYB-30	NYB-36	NYB-45	NYB-52	NYB-60	NYB-80
过滤面积 M2 Filtration area	12	15	20	25	30	36	45	52	60	80
油脂处理能力 参考 Capacity (T/H)	2-4	3-5	4-6	5-7	6-8	7-9	8-11	9-13	10-15	12-19
最大工作压力 Maximum working pressure (Mpa) 0.45										
设计压力 Design pressure (Mpa) 0.50										
工作温度 °C working temperature ≤150										
振动器和蝶阀机构空气压力 The vibrator and the valve mechanism of air pressure 0.40~0.60										
滤渣含油 (吹干后) The residue oil (After dried) ≤20%										
油中含杂质 Impurity in oil ≤0.01%(3)~0.0005%										
外形尺寸 长X宽X高 MM Appearance size length * width * high	1610×1250 ×2500	1710×1350 ×2650	1710×1350 ×2950	1810×1430 ×3020	2030×1550 ×3150	2030×1550 ×3250	2130×1560 ×3350	2230×1650 ×3670	2310×1750 ×3810	3210×2100 ×4500
重量 weight (Kg)	1100	1300	1700	2000	2500	3000	3500	4000	4500	5500



全自动油料轧胚机 Flaking Machine

YS PGY系列轧胚机主要用于植物油料的轧胚，使生胚达到最大的一致性。该机日产量大，工作平稳，液压系统压力稳定可靠等特点。轧辊之间还设有缓冲装置，减少轧辊之间的碰撞，提高轧辊的使用寿命。

PGY YS series machine is mainly used for the embryo of plant oil, so that the maximum consistency of the embryo. The machine has much capacity in working day, the working is stable, the hydraulic pressure system is stable and reliable and so on. A buffering device is arranged between the rollers to reduce the collision between the rollers and to improve the service life of the roller.

处理量 Capacity t/d	配备动力 Power kw	胚片厚度 Embryo thickness mm	净重 Weight (kg)
30-35	18.5	0.25-0.35	5000
35-42	30	0.25-0.35	7500
80-100	30+18.5+1.1+0.55	0.25-0.35	6500
130-150	22×2+1.1+0.55	0.25-0.35	7500
140-160	37+22+0.75+0.55	0.25-0.35	8000
200-250	45+30+0.75+0.55	0.25-0.35	10000
250-300	55+37+0.75+0.55	0.25-0.35	13000
450-500	75+45+0.75+0.55	0.25-0.35	18000





立式蒸炒锅 vertical steaming and stir-frying cauldron

YZCL系列蒸炒锅是油脂加工的主要设备之一，主要用于植物油料坯的蒸炒。将轧坯后的料坯，经过湿润、蒸坯、炒坯，使之转变为熟坯以适应预榨工艺要求和改善油品质量。

YZCL steaming cooker is one of the main equipments of oil processing, mainly used for vegetable oil cooking blank. After the blank is rolled, the material is wetted, evaporated and fired, which is changed into the cooked blank to meet the requirement of the pre pressing process and improve the quality of the oil.



型号参数 size	YZCL150 × 5	YZCL180 × 5	YZCL200 × 5	YZCL210 × 5	YZCL220 × 5	YZCL250 × 5	YZCL300 × 5
生产能力 capacity	1.0-13t/h	1.5-20t/h	2.5-30t/h	2.5-30t/h	3.0-35t/h	4.0-5t/h	5.0-6.5t/h
锅体内容 Inner diameter of pot body	∅ 1500mm	∅ 1800mm	∅ 2000mm	∅ 2100mm	∅ 2200mm	∅ 2500mm	∅ 3000mm
层数 Quantity	5	5	5	5	5	5	5
主轴转速 Spindle speed	33r/min	33r/min	33r/min	33r/min	30.5r/min	24r/min	24r/min
配备工率 Work rate	15kw	18.5kw	22kw	22kw	30kw	37kw	45kw
电机型号 Motor model	Y180L-6	Y200L1-6	Y200L1-6	Y200L1-6	Y225L1-6	Y250M-6	Y280S-6
减速机型号 Reducer type	ZLS-1-30	ZLS-1-30	ZLS-1-30	ZLS-1-30	ZLS-1-30	ZLS-1-40	ZLS-1-40
速比 speed ratio	1:30	1:30	1:30	1:30	1:30	1:30	1:30
加热面积 Heating area	14.6m²	19.7m²	23.6m²	25.6m²	27.6m²	35m²	48m²
最高蒸汽表压 The highest steam gauge	0.7MPa	0.7MPa	0.7MPa	0.7MPa	0.7MPa	0.7MPa	0.7MPa
锅体全高 Body full height	4710mm	4710mm	4710mm	4710mm	4150mm	4850mm	4850mm
机器重量 Machine weight	6000kg	7000kg	7300kg	8000kg	10000kg	13000kg	17000kg



斗式提升机 *Bucket elevator*

斗式提升机主要特点:

HL-ring chain centrifugal bucket elevator main characteristics:

1. 运行平稳, 传动效率高。
smooth operation, high transmission efficiency.
2. 性能优越, 操作简单, 便于维护。
Multi-hopper form, should be preferred.
3. 适应性强、安装维修方便、寿命长。
Strong adaptability, easy installation and maintenance, long life.
4. 整机体积小, 高速度, 确保快速、统一处理工作。
The whole small size, high speed, to ensure rapid and uniform delivery.



双筒圆打筛 *Double cylinder circular screen*



主要用于棉籽等带壳油料作物制油预处理清理工序。棉籽等经剥壳机破壳后, 可以直接进入本机, 将壳仁分离。

本机器操作简便, 通常在安装后不必作任何调整, 用户只需按指定转向接通电动机电源, 即可投入使用。

Mainly used for the pretreatment of cotton seed and other belt shell oil crops. The cottonseed shucking machine after the shell is broken, can be directly into the machine, the shell kernel separation.

This machine is easy to operate, usually do not have to make any adjustment after the installation, the user only need to turn on the motor power supply, you can put into use.



定州市永胜粮油机械有限公司
DINGZHOU YONGSHENG GRAIN & OIL MACHINERY CO., LTD

Small scale oil pressing machine 小型榨油机 YS95 YS100 YS120 YS130 YS160

技术参数: Technical Parameter:

1. 压榨主轴转速: 30-40 转/分钟
Pressing axle rotation speed: 30-40 revolutions/Min
2. 齿轮箱传动比: : 15/40 × 15/55 = 1:9.78
Gear box transmission ratio: 15/40 × 15/55 = 1:9.78
3. 匹配电源功率: 11kw-15kw (1440转/分钟)
Matching power: 11kw-15kw (1440 Revolutions/Min)
4. 尺寸: 长*宽*高度 (毫米) 1640×640×1200
Dimension : Length x Width x Height (mm) 1640×640×1200
5. 重量: ≈700kg
Weight: About 700kg
6. 日产量: 2-8吨
Daily output: 2-8 Ton





定州市永胜粮油机械有限公司
DINGZHOU YONGSHENG GRAIN & OIL MACHINERY CO., LTD

YZY 260 Product Show
YZY 260 实物展示





YZY260螺旋榨油机 YZY260 spiral oil press

YZY260榨油机技术参数:

YZY260 oil press technical parameter:

1. 生产能力:压榨35 - 45吨/天,预榨100 - 150吨。
production capacity: pressing 35-45 Ton/Day, pre-pressing 100-150 ton.
2. 使用蒸汽压力: 3-4kg/cm³。
Using of steam pressure:3-4kg/cm³.
3. 搅拌轴转速:41 转/分钟。
Agitation shaft rotation speed:41 revolutions/Min.
4. 压榨主轴转速: 28-51转/分钟。
Pressing axle rotation speed:28-51 revolutions/Min.
5. 输送轴主机转速: 85 转/分钟。
Feeding axle rotation speed:85 revolutions/Min.
6. 蒸炒温度:60 - 110℃。
Steaming and frying temperature:60-110℃.
7. 匹配电源功率: 75KW。
Matching power:75KW.
8. 尺寸(长*宽*高):
3800×2320×3800mm
Dimension (Length x Width x Height):
3800×2320×3800mm
9. 净重: 9000kg。
Net weight:9000kg





YZY290 全天候榨油机 YZY290 whole-day oil expeller

技术参数: Technical Parameter

日常生产能力:压榨80 - 100吨,预榨180 - 240吨。

Daily production capacity: pressing 80-100 Ton, prepressing 180-240 Ton.

YZY290型号榨油机有两个功能:压榨和预榨,主要性能特点如下:

Model YZY290 preliminary oil press has two functions: pressing and prepressing, under the condition of normal pretreatment, main performance characteristics are as follows:

1. 处理能力大,车间占地面积小,低能耗,机器外观和设计合理。

With a large handling capacity, the workshop covers an area of smaller, low power consumption, reasonable and generous appearance.

2. 预压的油料饼结构松散不分散,有利于溶剂渗透。

The cake structure prepressing loose but not scattered, in favour of to the solvent penetration.

3. 油料饼和水含量,适用于溶剂浸出。

The oil and water content in cake, and is suitable for solvent leaching

4. 螺旋采用轻压勤压,步步增压,压力不断的先进技术及专利,使一次性压榨与预榨饼残油率低。

The barrel screw using light pressure, regular pressure, the pressure step by step and other advanced technology, low residual oil in cake.

5. 蜗轮蜗杆的专利技术,不需要停止机器,容易和快速校准与调整性能。

The cake checking mechanism adopting the worm gear and worm patent technology, no need to stop, easy and quick for calibration and adjustment.

6. 提取笼耳板打开和关闭的设计,易于组装和维护,减少劳动强度。

Extracting cage has the design of ear plate opening and closing, easy to assembly and maintain, reduce labor intensity.

7. 迷宫式密封的端面压螺栓,完美的解决了螺栓连接面和渣滓渗出的问题。

Using labyrinth seal for the end face of pressing bolts, Solve the problem of pressing bolts junction surface and dregs seeping.

8. 高质量的炼油率。

The quality of pressed oil refining rate is high.

9. 机器质量好,产量高。

The machine quality and the yield of extractor fit well.

10. 逐步扭转增压密封状态的油料作物,可以有效地压榨玉米胚芽,可可果仁,油菜籽油等植物。

Pressurize progressively, to reverse material in a pressurized state, can effectively solve the problem like difficult to press of corn germ, dry coconut, rapeseed such oil plants.

电动机: Matching motor: Y315M1-6-132KW(Main motor)

减速器: 7.5KW EWFL87-34.5-Y-7.5/4(Reducer)

减速器3.0KW BLY18-17(Reducer)

减速器2.2KW XWD3-11(Reducer)





定州市永胜粮油机械有限公司
DINGZHOU YONGSHENG GRAIN & OIL MACHINERY CO., LTD

YZY 290 SHOW



YZY 290 实物展示





200型榨油机
200 screw
oil press machine



技术数据 Technology Data

1.生产能力：(籽料处理量) Capacity: (handling amount of seed)

- 1、辅助蒸缸直径Auxiliary Cooker Diameter : $\phi 1220$ mm;
- 2、搅拌轴转数Rotating speed of mixer shaft: 35 rpm;
- 3、榨轴转数RPM of main shaft : 8 rpm;
- 4、喂料轴转数RPM of feeding shaft : 69 rpm;
- 5、使用蒸气压力Steam pressure: 5~6 kg/cm²;
- 6、配用动力Motor power: 18.5 kw;
- 7、外形尺寸Dimension(L×W×H): 2850×1850×3270mm;
- 8、机重Weight: 5000 kg。

说明:

- (1) 实际产量因物料品种和操作条件的不同, 上表中的数字可能会有所增减。
- (2) 压榨米糠另使用专用榨螺。

Note:

- (1) The actual capacity may be more or less according to meal preparation condition and the kind of seed.
- (2) For the pressing of rice bran, special pressing worms should be adopted.

籽坯名称 Seed	处理量 Capacity (k g/24h)	出油率 Oil yield (%)	干饼残油率 Dry cake residual oil rate (%)
菜籽 Rapeseed	9000~10000	33~38	6~7
花生仁 Peanut kernel	9000~10000	38~45	5~6
芝麻 Sesame	6500~7500	42~47	7~7.5
棉仁 Cottonseed kernel	9000~10000	30~33	5~6
黄豆 Soybean	8000~9000	11~14	5~6
葵花籽 Sunflower seed kernel	7000~8000	22~25	8~9.5
米糠 Rice bran	5500~6500	10~14	7~8





204型螺旋预榨机 204 primary expeller oil machine

概要

204型预榨机是一种连续螺旋榨油机，适用于植物油厂预榨—浸出工艺，可处理花生仁、棉籽仁、菜籽、红花籽、蓖麻籽和向日葵仁等含油较多的多种油料。

技术数据

- 1.外形尺寸：2900×1850×4100 mm
- 2.净重：约5800 kg
- 3.电机：主轴：Y225M-6，30 kw；蒸缸搅拌轴：Y132S-4，5.5 kw；
喂料轴：Y100L-4，3.0 kw；220/380V，50 Hz
- 4.处理量：75~80 t/24h（以向日葵仁或菜籽为例）
- 5.饼中残油率：15~18%左右（在正常预处理条件下）

General description

204 screw pre-press is a continuous running screw expeller, specially suitable for the pre-pressing and solvent extraction, it can be used for the pressing of peanut kernel, cottonseed kernel, rapeseed, safflower seed, castor seed and sunflower seed kernel, etc.

Technology Data

1. Capacity: above 75-80T/D (take sunflowerseed or rapeseed pressing as example)
2. Residual oil content in cake: 15-18% (under appropriate preparation)
3. Motor power: main shaft: Y225M-6, 30Kw; Cooker shaft: Y132S-4, 5.5kw;
4. Net weight: approx 5800KG
5. Dimension: 2900×1850×4100mm





202型榨油机 202 expeller oil machine

202型螺旋预榨机是一种连续螺旋榨油机，适用于植物油厂预榨一浸出或两次压榨工艺，处理花生仁、棉籽仁、菜籽和向日葵等含油较多的油料。

技术数据：

- 1.处理45-50T/24小时（以向日葵或菜籽为例）；
- 2.饼中残油率13%左右（在正常预处理条件下）；
- 3.电机Y225M-6,1000转/分，30千瓦，220V/380V，50赫兹；
- 4.净重约5500公斤；
- 5.外形尺寸 2900 x 1850 x 3640毫米。

202-3 type spiral press is a continuous screw press, apply vegetable oil factory in pre-pressing extraction or twice pressing process, kernel of peanut, cottonseed, rapeseed and sunflower oil like these seeds which contents more rate of oil.

Technical data:

- 1.45-50T/24 hours (with sunflower or rapeseed, for example);
- 2.cake residual oil rate in 13% (during normal conditions of pretreatment);
- 3.motor Y225M-6,1000 rpm, 30-kilowatt, 220V/380V,50 Hz;
- 4.net weight of about 5500 kg;
- 5.dimensions 2900 x 1850 x 3640 mm.





定州市永胜粮油机械有限公司
DINGZHOU YONGSHENG GRAIN & OIL MACHINERY CO., LTD



2022 show
2022机器展示





精炼设备

处理量：1-300吨

Refining equipment

Handling capacity: 1-300 Ton

精炼油设备主要用于压榨油的处理工作，使原油达到转储油的标准（可在被装桶放在超市）或国家高级烹调油。植物油是油压榨或浸出的毛油，含有对消费者有害的物质。这些物质中有些是天然存在的，有些是在生产或贮存的过程中产生的。为人们消费，这些物质必须小心地除去，由于它们形成原因不同。根据不同的原油，精炼过程可以分为：脱胶，脱酸，脱色，脱臭，脱胶，脱蜡等步骤。根据不同油品，可以采用几个过程的部分或全部的工序。

Refined oil equipment mainly used for processing work of the oil squeezed out, to make raw material reach the standards of dump oil (can be barreled on the supermarket) or the national senior cooking oil. Plant oil is just the product of oil pressing or leaching, it contains material that's harmful to the consumer. Some of these substances are naturally occurring, some are in the process of production or storage, for people to consumption, these substances must be removed carefully. Due to the different cause of them, the refining work must take steps under different conditions. According to different crude oil, refining process can be divided into: degumming, deacidification, decoloring, deodorization, degumming, dewaxing and other steps, Can adapt a few of them or all of the process on the basis of oil varieties.





浸出车间 Extract workshop

拖链浸出器的优点:

物料在料床上被分成若干个独立的单元，有效防止各级混合油在料层上流窜，可以保证各段喷淋之间的浓度梯度。每个料格内形成浸泡区，可获得更好的浸泡效果。链箱由轨道支撑不与筛面接触，使筛面的寿命更长。采用国际领先的液压马达双轴驱动，均衡受力，运行可靠，维护费用少。更适用于高含油、高粉末度的物料，普通油料浸出效果更佳。

Chain extractor advantages:

The material in the feed bed is divided into several independent units at all levels to effectively prevent the mixing of oil flows on the material layer, it can ensure the concentration gradient between the segments shower. Each cell is formed in the material soaking zone for better immersion effect. Chain box by the rail support is not in contact with the screen surface, so the surface of the sifter can keep a longer life. A leading international biaxial hydraulic motor drive, balanced force, reliable operation and low maintenance costs. More suitable for high content oil seeds, high degree of fine material, ordinary oil leaching better.



成套浸出设备主要由浸出器、蒸脱机、蒸发器、汽提塔、冷凝器等设备组成。利用有机溶剂的萃取原理，经过对油料料胚（大豆）或预榨饼（菜籽、棉籽、葵花籽、花生、米糠、芝麻、茶籽、椰子等）的接触、浸泡或喷淋，使油料中油脂被萃取出来。本工艺采用不锈钢列管冷凝器、铝合金列管冷凝器或板式冷凝器、尾气冷冻回收装置，工艺先进，性能优良。本公司承接10-400T/D成套浸出工程设备。

Complete sets of equipment mainly consists of leaching, leaching DTDC, evaporator, condenser, stripper and other equipment. After embryo (soybean) or pre pressing cake (rapeseed, cottonseed, sunflower seeds, peanuts, rice bran, sesame seed, tea seed, coconut and so on) contact, immersion or spray of oil slurry, so that fuel oil was extracted by organic solvent extraction principle. This process adopts stainless steel tube condenser, aluminum alloy tube condenser or plate condenser, tail gas refrigeration recovery unit, advanced technology, excellent performance. The company to undertake 10-400T/D complete sets of leaching equipment.



定州市永胜粮油机械有限公司
DINGZHOU YONGSHENG GRAIN & OIL MACHINERY CO., LTD

Oil Press workshop line 榨油车间交钥匙工程展示





定州市永胜粮油机械有限公司
DINGZHOU YONGSHENG GRAIN & OIL MACHINERY CO., LTD

extractor equipment workshop line
浸出车间交钥匙工程项目展示





定州市永胜粮油机械有限公司
DINGZHOU YONGSHENG GRAIN & OIL MACHINERY CO., LTD

oil refinery workshop
食用油精炼车间效果展示



filling machine
罐装生产线展示



定州市永胜粮油机械有限公司
DINGZHOU YONGSHENG GRAIN & OIL MACHINERY CO., LTD

machine accessory
榨油机机械配件生产制造



friendship
国外客户签约



我们公司的承诺：质量可靠/供货及时/服务最佳

做油脂设备工程领导者！



Наше обязательство:

надежное качество / своевременная поставка / самое лучшее обслуживание

У лидера оборудования нефтяной проект!

定州市永胜粮油机械有限公司

Dingzhou Yongsheng Grain and Oil Machinery Co.,Ltd

Production factory address:

North town development zone of DingZhou, Hebei province.

Assembly plant address:

Science and Technology Park , DingZhou , Hebei, China.

TEL: +86-312-2727088

FAX: +86-312-2621678

MOB: +86-18631226706

<http://www.oilmillchina.com>

<http://www.oilpresschina.com>

Email: info@oilmillchina.com oilmillchina@yahoo.com

