




Street-legal component approval certificate

for non-original motorcycle exhaust system

501349

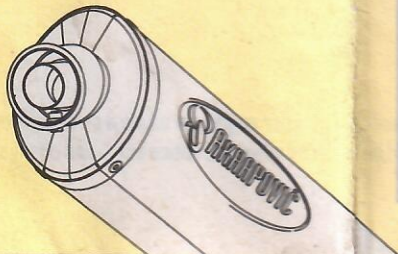

Component approval No.:	e1*97/24*2003/77/9/III*0569*01
Issued by:	Kraftfahrt-Bundesamt, Office building, Fördestraße 16, 24944 Flensburg, Germany
Place & date of type-approval:	Flensburg, 17.05.2006
Report No.:	06-00140-CM-GBM, Ext. 01
Issued by:	TÜV SÜD AUTOMOTIVE GMBH TÜV SÜD Gruppe DE-85748 Garching
Date of issue:	15.05.2006
Approval identification:	e1 0569

Type and version of exhaust:	M-HR001 / M-HR00105C, M-HR00105CL, M-HR00105T, M-HR00105TL, M-HR00106C, M-HR00106CL, M-HR00106T, M-HR00106TL
Technical unit:	Technical unit, consisting out of one silencer according to drawing no. M-HR001, rhombic 110 x 140 mm, length 340 mm without endcaps, absorption-reflection-principle with an outlet pipe \varnothing 28 mm in combination with nonoriginal header system.
Marking:	Engraved by laser / plate fixed with rivets.
Field of application:	

Manufacturer	Commercial description	Vehicle type (and no. of homologation)	Engine type	Year model	Component parts, dimensions in mm	Dimensions of the part in mm or original part / replacement part	Akrapovic part no.	
KTM	990 Superduke	KTM LC8 EFI (e1*0232*)	610 with cat.	05 - 06	Header pipes	Original parts	-	
					Collector	Original parts	-	
					Y-pipe	-	L-KTMS08	
					Silencer left (outlet pipe \varnothing 28 / inlet pipe \varnothing 56)	Hexagonal \varnothing 140 x 110 Length without end caps 340	M-HR00105(CL) or (TL) M-HR00106(CL) or (TL)	
					Silencer right (outlet pipe \varnothing 28 / inlet pipe \varnothing 56)	Hexagonal \varnothing 140 x 110 Length without end caps 340	M-HR00105(C) or (T) M-HR00106(C) or (T)	
					Header pipes	-	H-KTMR16 or H-KTMR16	
					Collector	-	C-KTMR16 or C-KTMR16	
	950 Supermoto	KTM LC8 SM (e1*0249*)	875 with cat.			Catalytic insert	-	P-KAT-004
						Y-pipe	-	L-KTMR16 or L-KTMR16
						Silencer left (outlet pipe \varnothing 28 / inlet pipe \varnothing 56)	Hexagonal \varnothing 140 x 110 Length without end caps 340	M-HR00105(CL) or (TL) M-HR00106(CL) or (TL)
						Silencer right (outlet pipe \varnothing 28 / inlet pipe \varnothing 56)	Hexagonal \varnothing 140 x 110 Length without end caps 340	M-HR00105(C) or (T) M-HR00106(C) or (T)
						Header pipes	-	H-KTMR17 or H-KTMR17
						Collector	-	C-KTMR17 or C-KTMR17
						Y-pipe	-	L-KTMR17 or L-KTMR17



To be filled out by Akrapovič representative:

Date of purchase: _____

Issued by: _____

Stamp & signature:



Muffler repack kit service intervals

The durability of the damping material depends on the type of motorcycle, riding style, mileage etc. Normally, single and twin cylinder engines produce a stronger exhaust gas wave pulse and a higher temperature. Often, riding on a race track requires noise limitation. The insulating material should be replaced when you notice any visual changes on the muffler sleeve material or when the muffler exceeds the noise limit. Please check the muffler visually before every season.

Date: _____

Date: _____

Performed by: _____

Performed by: _____

Stamp & signature: _____

Stamp & signature: _____

Date: _____

Date: _____

Performed by: _____

Performed by: _____

Stamp & signature: _____

Stamp & signature: _____

Date: _____

Date: _____

Performed by: _____

Performed by: _____

Stamp & signature: _____

Stamp & signature: _____

Maintenance

1. Clean titanium muffler outer sleeves with a multi-purpose spray lubricant (WD-40 or equivalent) and carbon-fiber outer sleeves with soft and dry cloth. Do not use aggressive chemical cleaners, because they can damage the sticker. A change in the color of the exhaust system is normal due to the high temperatures.

2. The wearing out of the muffler silencing material depends on the type of engine and riding style. Contact your dealer/serviceman if visible changes appear on the muffler outer sleeve or the noise level is increased.

3. Periodically make sure all the bolts are sufficiently tight.



Exclusion of Certain Liability

1. The manufacturer, importer or dealer shall not be liable for any incidental damage including personal injury or any other damages caused by improper installation or operation of the Akrapovič exhaust system. When installing the Akrapovič exhaust system be careful that the exhaust system does not touch other parts sensitive to high temperature.

2. Akrapovič makes no representation or warranties with regard to damage caused by the improper installation, use and maintenance of the Akrapovič exhaust system. The warranty is limited to defects recognized by our technical department and to normal use, and excludes items subject to normal wear (gaskets and damping wool). The guarantee is void in case of accident, modification, improper or competition use.

3. Do not attempt to install the Akrapovič exhaust system on a motorcycle for which it was not made or tested by Akrapovič.

4. When the exhaust system gets very hot during operation, be careful not to burn yourself on the exhaust system or parts which are in direct contact with it, even when the motor is not running. Also protect other people, especially children, from the injuries mentioned above.

5. In some cases Akrapovič exhaust system kits contain chemical products (ceramic anti-seizing grease). Handle with care, do not inhale or swallow. Avoid excessive contact with skin, eyes or mucous membranes. Keep out of the reach of children.

6. Technical specifications of Akrapovič exhaust systems and related products subject to change without notice.