



Fill out and return to: [products@essenlux.com](mailto:products@essenlux.com) for an estimate of the cost of the lift. All estimates must be verified prior to installation.

Please include photos of the stairway from top and bottom, and top and bottom landings with evaluation form.



Pinnacle SL300 Straight Stair Lift EVALUATION/ORDER FORM



Date, Sales Representative, Dealer, Address, City, State, Zip, Phone, Fax, Email, Opportunity Reference / Project Name, Quote, Order, Account Number, Purchase Order Number, Shipping, Ship To Address, Contact, Phone, Projected Close Date

CONFIGURATION

QTY SL300 Std. 15'6" Rail, QTY SL300COS, w/Chassis Obst. Sensors, 15'6" Rail Straight, QTY SL300FR - LH Folding Rail, Left Hand, 15'6" Rail, QTY SL300FR - RH Folding Rail, Right Hand, 15'6" Rail

TRACK, PARTS & OPTIONS


Track

QTY SL600T3 - 3' Mid Section Assembly w/brackets, QTY SL600T5 - 5' Mid Section Assembly w/brackets, QTY SL600T8 - 8' Mid Section Assembly w/brackets, [ ] SL600C - Custom Cut Ft in length (including overrun) single unit orders only. Must include additional mid-section(s) above if total above 15'6".

Parts & Options

QTY SL305 - Key Lock on Lift (chassis), QTY SL600SB1 - Additional Short Brackets, QTY SL600TB1 - Additional Tall Brackets, QTY SL600CC8 - 8' Charger Cord Extension, QTY SL300RET - Retractable Seat Belt (Dir Install)

HOW TO MEASURE

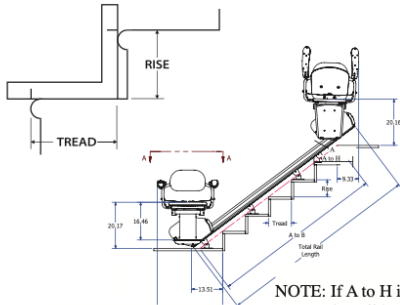

NOTE: If A to H is < 13", must order tall bracket.

Measurements

A to B - Inches from top landing to bottom floor, A to H - Inches from top landing to nearest obstruction - for example, a door

Rise \_\_\_ Inches Tread \_\_\_ Inches Width \_\_\_ Inches

7" Overrun recommended if top landing is clear (This is added to the A to B)

Notes