

HP

河北汇品机械设备有限公司

Hebei Huipin Machinery Co.,LTD

PROFESSIONAL
FOOD OIL MACHINERY MANUFACTURER



HP

河北汇品机械设备有限公司
HEBEI HUIPIN MACHINERY CO.,LTD

地址：河北省定州市西城乡北疃村

Address (legal address): Beiding village, Dingzhou city, Hebei province, China

TEL: +0086-0312-2727088

FAX: +0086-0312-2621678


MOB: +0086-18631226706 +0086-15532236149

Web: www.chinaoilxpeller.com

Email: info@oilmillchina.com oilmillchina@yahoo.com

HP

点滴之间——彰显汇品品质.....

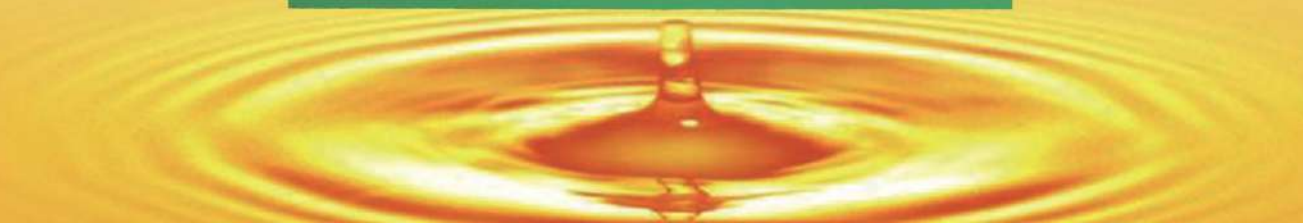

企业简介 ABOUT US

河北汇品机械设备有限公司是一家专业的集科研，设计，生产，销售，项目安装为一体的大型粮油设备企业。下属企业有定州永胜粮油机械有限公司以及万利粮油机械有限公司。

公司经过四十多年的发展，现拥有一流的油脂设备生产基地，专业的油脂技术工程师和专家，以及先进的生产技术和精密的设备。所有的油脂设备以及配件都为自主生产。

我公司整套的油脂生产线设备，原料清理，预处理，浸出，精炼，灌装以及副产品的加工（如磷脂工程，蛋白质工程）均由我公司与国内科研机构院校共同开发，先进的制油技术适用于各种大，中，小型油厂。我公司也会根据客户要求以及今后发展为客户设计方案以及工厂布局，旧厂改造，为客户解决油脂生产中面临的难题。

我方会根据需求为客户制作方案及报价，设备到达后我方工程师负责指导安装调试设备，直至设备运行良好。

欢迎广大客户来厂参观洽谈业务！

Hebei Huipin Machinery Co., Ltd. is a large-scale grain and oil equipment enterprise specialized in scientific research, design, production, sales and project installation. Subordinate enterprises include Dingzhou Yongsheng Grain and Oil Machinery Co., Ltd. and Wanli Grain and Oil Machinery Co., Ltd.

After more than 40 years of development, the company now has a first-class grease equipment production base, professional grease technical engineers and experts, as well as advanced production technology and precision equipment. All grease equipment and accessories are produced independently.

Our company's complete set of oil production line equipment, raw material cleaning, pretreatment, leaching, refining, filling and by-product processing (such as phospholipid engineering, protein engineering) are developed by our company together with domestic scientific research institutions and institutions. Advanced oil production technology is applicable to all kinds of large, medium and small oil plants. Our company will also be based on customer requirements and future development for customer design and factory layout, old plant transformation, to solve the problems faced by customers in oil production.

We will make plans and quotations for customers according to their needs. Our engineers will be responsible for guiding the installation and commissioning of the equipment until it runs well.

Welcome customers to visit and negotiate business!

俄罗斯客商订购100吨葵花籽油生产线设备
Russian customer order 100TPD sunflower seed oil production line



哈萨克斯坦客户来厂考察
Kazakhstan Customer Visit Our Factory



300吨玉米胚芽油生产线
300TPD Corn Germ Oil Production Line



300吨玉米胚芽油生产线
300TPD Corn Germ Oil Production Line



YZY260 Screw Oil Press

YZY260 type is a continuous Spiral Oil Press Machine. It is suitable for large oil plant Prepress - leaching or two pressing process. This Food Oil Making Machine is suitable for peanut, cottonseed, rapeseed, sunflower seed, corn germ oil, coconut and other high oil content oil seeds.

用途范围

YZY260型榨油机是一种连续的螺旋榨油机,适用于大型植物油厂预榨-浸出或两次压榨工艺,加工对象如花生仁、棉籽仁、菜籽、葵花籽仁、玉米胚芽、椰子等含油较多的植物油籽。

Main technical parameters

- Capacity: Press: 35-50TPD (take cottonseed as example)
Prepress: 120-150TPD (take cottonseed as example)
- Motor Power: Y280M-6-75KW (main motor)
5.5KW BLY27-35 (Reduction drive)
2.2KW BLY18-17 (Reduction drive)
- Screw spindle speed: 32rpm or 38rpm
- Main motor current: 120A-130A
- The thickness of the cake: 8 - 20mm
- Cake residual oil rate: 10 - 16%
- Overall Dimensions (L×W×H): 3806×1238×3418mm
- Net weight: 8500 kg.

主要技术参数

- 处理量: 压榨35 - 50吨 / 24小时 (以棉籽为例)
预榨120 - 150吨 / 24小时 (以棉籽为例)
- 配用电机: Y280M-6-75KW (主电机)
5.5KW BLY27-35 (减速机)
2.2KW BLY18-17 (减速机)
- 榨螺主轴转速: 32rpm或38rpm
- 主机电流: 120A-130A
- 出饼厚度: 8 - 20mm
- 干饼残油率: 10 - 16% (以棉籽为例)
- 外形尺寸: 3806×1238×3418
- 净重: 约8500 kg



YZY290 Screw Oil Press

YZY290 type is a continuous spiral prepressing and pressing amphibious oil press. It is suitable for peanut oil plant processing, cottonseed kernels, rapeseed, sunflower seed kernel, corn germ oil seeds such as oilseed plants.

用途范围

YZY290型是一种连续螺旋预压两榨榨油机,适用于花生油料植物加工、棉籽仁、油菜籽、葵花籽仁、玉米胚芽油料种子等油料植物。

Main technical parameters

- Input Capacity: Press 80-100Ton per day; Prepress 180-240 Ton per day
Note: different parts of the fuel, and residual oil production will change.
- Motor: Y355M1-6-160KW or Y315L2-6-132KW (main motor)
7.5KW or 11KW EWFL87-34.5-Y-7.5/4 (Reducer)
3.0KW BLY18-17 (Reducer)
2.2KW XWD3-11 (Reducer)
- Steam Pressure: 3-4kg/cm³
- Pressing Shaft Speed: 28-51rpm
- Feed Shaft Speed: 85rpm
- Steaming and frying Temperature: 60-110°C
- The thickness of the cake: 15-20mm
- Dimension: 5100×2150×3930mm
- Net weight: 14500 kg



model	key index	Maize Germ	Rape-seed	cottonseed		peanut kernel		oil sunflower	cas-tor-oil plant
		pre-press	pe-press	press	pre-press	press	pre-press	pre-press	pre-press
ZY290 spiral oil press	handling capacity T/D (≥)	130—150	180—200	80—100	200—230	80—100	200—230	180—200	150—200
	Residual oil in the cake	15%—18%	14%—16%	5%—7%	13%—16%	5%—7%	10%—14%	14%—18%	13%—16%
	Cake powder degrees (≤)	5%	6%	5%	5%	5%	4%	5%	4%

200A-3 Screw Oil Press

General description

本机适用于榨取菜籽、花生仁、芝麻、棉籽仁、大豆、椰子、茶籽、葵花籽等植物油。
(根据用户需要,可更换榨螺,用于榨取米糠等含油的油料)

This machine is suitable for pressing the rapeseed, peanut, sesame, cottonseed, soybean, coconut, camellia seed, sunflower seeds and other plant oil seed.

(According to user's needs, can replace the screw, for pressing the rice bran and oil seed)



Model	Dimension	Net Weight (KG)	Power (KW)
200A-3	2900×1850×3240mm	5000	18.5KW

籽还名称 (Oil seed)	处理量 公斤/24小时 Capacity (kg/24h)	出油率% Oil Yield	干饼残油率% Residual oil in the cake
菜籽 Rapeseed	9000~10000	33~38	6~7
花生仁 Peanut	9000~10000	38~45	5~6
芝麻 Sesame	6500~7500	42~47	7~7.5
棉仁 Cottonseed	9000~10000	30~33	5~6
黄豆 Soybean	8000~9000	11~14	5~6
动物油 (Animal oil)	8000~9000	11~14	8~12
葵花籽 Sunflower	7000~8000	22~25	6~7

202-3 Screw Oil Press

General description

202-3型系列螺旋预榨机是一种连续性螺旋预榨机,适用于植物油厂预榨—浸出或两次压榨工艺,用于处理油菜籽、花生仁、向日葵籽、柿子仁等含油较多的油料。

202-3 Pre-press expeller is a continuity oil expeller which is suitable for pre-pressing leach or pressing twice in the vegetable oil plant, and used to handle with oily seeds such as rapeseed, peanut, sunflower seed and persimmon seed.

Technical data 技术参数

生产能力 Productive ability40-50(t/d) (棉籽为例)

饼中残油率 Residual oil in cake12-16%

设备质量 Sets weight 5800kg

外形尺寸 Outlook dimension 3000*1856*3680mm

电机功率 Electric machine power (kw) 1. 主电机 Main engine 30KW



Main Technical Data

Model	Capacity	Oil in cake	Power	Overall dimensions(L×W×H)	N.W.
202-3	40-50 t/d	12-16 %	30 kw	2900×1850×3640 mm	5500 kg

ZY204 Screw Oil Press

General description

ZY204 Cooking Oil Pre-press Expeller Machine is a continuous Edible Oil Expeller which is suitable for pre-pressing leach or pressing twice in the vegetable oil plant, and used to handle with oil seeds with more oil such as rapeseed, peanut, sunflower seed and persimmon seed.

介绍

ZY204型食用油预榨榨油机是一种适用于植物油厂一次榨油或两次榨油的连续式食用油榨油机，用于处理油菜籽、花生、葵花籽、柿子籽等含油量较大的油料种子。

Technical data 技术参数

生产能力65-80(t/d) (棉籽为例)

饼中残油率14-16%

设备质量 5800kg

外形尺寸 3000*1856*3680mm

电机功率 (kw)

1. 主电机 30KW

2. 蒸缸 5-5KW

3. 喂料 1-5KW

Productive ability - 75-80(t/d) (According to cottonseed)

Residual oil in cake - 14-16%

Sets weight - 5800kg

Outlook dimension - 3000*1856*3680mm

Power (KW) -

Main engine: 30KW

Cooker : 5-5KW

Cylinder : 1-5KW



Model 100-160

Screw oil press model	Capacity	Power(kw)	Packing Size(mm)	Net weight (kg)
YS-68	1ton/24h	5.5kw	920*390*750	130
YS-80	3tons/24h	5.5kw	1540*510*680	330
YS-100	5tons/24h	7.5kw	1920*550*765	480
YS-120	6tons/24h	15kw	2100*610*785	600
YS-130	8-12tons/24h	18.5kw	2240*610*815	730
YS-160	13-18tons/24h	18.5kw	2020*700*1480	960
YS-165	15-20tons/24h	22-30kw	2290*750*1020 880*750*760	1500

Model 100A-160A

Screw oil press model	Capacity	Power(kw)	Packing Size(mm)	Net weight (kg)
6YL-80A	3-4T/24H	1.5-5.5kw	1480*630*1570 1060*575*620	700
6YL-90A	3-4T/24H	1.5-5.5kw	1480*630*1570 1060*575*620	700
6YL-100A	5T/24H	1.5-7.5kw	2250*890*1820 1230*640*570	900
6YL-120A	6T/24H	1.5-7.5kw	2280*890*1770 1350*700*570	1000
6YL-130A	8-10T/24H	1.5-15kw	2250*840*1850 1350*700*570	1500



LZY-126 Screw Oil Press

Application 适用范围

This machine can be used for corn germs, tea seeds, safflowers seeds, flax seeds, sunflower seeds, peanuts, soybeans, rapeseeds and other oilseeds.

本机适用于榨取玉米胚芽、油菜籽、红花籽、亚麻籽、葵花籽、花生仁、大豆、菜籽等植物油籽。

Model Features 适用范围

1. Two spirals gear together, strong conveying ability, high crushing rate, high pressure, suitable for high and low one-time press of oil seeds, very low residual oil rate.
2. High strength design, high-quality steel manufacturing, durable, simple operation, low failure rate.
3. Tail out of the cake, the advanced new bread institutions in the school, the school fast and convenient.
4. Press cage around the shell stand close, to avoid the press cage used slag, the outlet flow. Equipped with principle axis, open and close easily.



The main technical parameters see below 主要技术参数见下表

关键指标 Key indicators	油料品种 Oilseeds varieties						
	玉米胚芽 corn germ	茶籽 Tea seed	红花籽 Safflower	亚麻籽 Flax seed	油菜籽 sunflower	大豆 soybean	菜籽 Rapeseed
工艺process	压榨press	压榨press	压榨press	压榨press	压榨press	压榨press	压榨press
处理量T/D handling capacity/T/D	5-7	5-7	5-7	5-7	6-8	5-7	6-8
饼中残油(≤) Residual oil rate (≤)	8%-9%	4%-5%	5%-6%	5%-6%	5%-6%	5%-6%	5%-6%

2. 榨油转速 Pressing worm speed: 10-16转/分
3. 喂料轴转速 Feed shaft speed: 60-80转/分
4. 配备动力 Power demand: 15-18.5KW
5. 外形尺寸(长×宽×高) Overall dimensions: 3400×800×2000mm
6. 净重 Net weight: 约3500kg

LZY-206 Screw Oil Press

本机用途适用于植物油料的榨取，既能适用于高温蒸炒油料的压榨(热榨)又能适合常温未经蒸炒的油料压榨(冷榨)。This machine USES suitable for plant extract oil, it is not only suitable for high temperature steaming and frying oil press (hot press) but also suitable for room temperature without steaming and frying oil press (cold pressed).

同时亦能适宜油料的低温压榨；尤其适宜于植物油料脱皮或脱壳后的常温和低温压榨，如：油茶籽、茶叶籽、玉米胚芽、油菜籽、油菜籽、红花籽、牡丹籽、花生仁、棉籽仁、等特种油料亚麻籽、橡胶籽、火麻子和花椒籽等常温或低温压榨。

At the same time also can suitable for cold pressing of oil; Especially suitable for oil seed peeling after shelling or room temperature and low temperature crushing, such as: camellia seed, tea seed, corn germ, rapeseed, canopy seed, safflower, peony seed, special oil such as peanut kernels, cottonseed kernels, flax seed, rubber seed, fire is pitted and prickly ash seed room temperature or cold pressing.



The main technical parameters see below 主要技术参数见下表:

榨机型号Model	L--126	L--206
日生产处理量(capacity per day)Ton/24hours	4—10	20—40
榨螺轴转速(speed of spindle) r/min	10—16	10—16
主电机功率Main power(KW)	15	45
垂直压料轴转速 (Round speed of vertical pressing shaft)r/min	60—80	60—80
垂直压料电机功率(Vertical swage power)KW	1.1	3.0
水平绞笼电机功率(horizontal scraper power)KW	0.75 (frequency control)	1.5 (frequency control)
整机外形尺寸overall dimension (mm)	3300x1700x1500	4365x2300x1500

Spare Parts of Oil Expeller 榨油机配件



YZCL系列蒸炒锅
YZCL Series Cooker

YZCL. 150-300 x 5 Cooker

YZCL.150-300 *5 layer series vertical steaming and frying pan is one of the main auxiliary equipment of oil production equipment, it is in the YZCL.180* 5 type steaming and frying pan grassroots re-designed models. The machine with bottom reducer. The machine is my factory of stereo-types products, through continuous improvement and improved, the technical indicators have reached the design requirements, is large and medium-sized oil refinery for the given ideal equipment for processing of oil.



型号参数 size	YZCL150 x 5	YZCL180 x 5	YZCL200 x 5	YZCL220 x 5	YZCL250 x 5	YZCL300 x 5
生产能力 capacity	1.0-1.3t/h	1.5-2.0t/h	2.5-3.0t/h	3.0-3.5t/h	4.0-5.0t/h	5.0-6.5t/h
锅体内径 Inner diameter of pot body	φ 1500mm	φ 1800mm	φ 2000mm	φ 2200mm	φ 2500mm	φ 3000mm
主轴转速 Spindle speed	33r/min	33r/min	33r/min	30.5r/min	24r/min	24/min
配备工率 Work rate	15kw	18.5kw	22kw	30kw	37kw	45kw
加热面积 Heating area	14.6 m ²	19.7 m ²	23.6 m ²	27.6 m ²	35 m ²	48 m ²
最高蒸汽表压 The highest steam gauge	0.7MPa	0.7MPa	0.7MPa	0.7MPa	0.7MPa	0.7MPa
锅体全高 Body full height	4710mm	4710mm	4710mm	4150mm	4850mm	4850mm
机器重量 Machine weight	6000kg	7000kg	7300kg	10000kg	13000kg	17000kg

油料预处理设备
Oilseed Pretreatment Machine

Crusher Machine 破碎机

Oilseed crusher is a crusher equipment which uses double teeth roll to crush granular materials twice in a row in order to meet the technological requirements. It is suitable for soybean, peanut, soybean meal and so on. Crusher can make oil seeds better squeezed out of oil. 油籽预处理破碎机是为满足工艺要求, 采用双齿辊对颗粒状物料进行连续两次破碎加工的破碎机设备, 适用于大豆、花生、豆粕等。破碎机能使油籽更好的压榨出油。



Model	Capacity (T/24H)	Power (KW)	Crushing Size (Section)	Powder Degree (%)	Dimension (cm)	Weight (KG)
YS25x100	160-200	11*2+0.55	1/4 - 1/8	≤4	190x78x191	3000
YS25x125	220-260	15*2+0.55	1/4 - 1/8	≤4	220x78x191	3500
YS30x100	260-280	15*2+0.55	1/4 - 1/8	≤4	195x90x213	4300
YS30x125	300-320	18.5*2+0.55	1/4 - 1/8	≤4	223x90x213	4800
YS35x150	450-500	55+0.75	1/4 - 1/8	≤4	260x133x211	8000
YS35x190	980-1000	90+1.1	1/4 - 1/8	≤4	300x133x211	10000
YS40x100	280-300	15*2+0.75	1/4 - 1/8	≤4	205x120x231	6000
YS40x125	320-350	18.5*2+0.75	1/4 - 1/8	≤4	230x120x231	7000
YS40x150	400-500	22*2+0.75	1/4 - 1/8	≤4	255x120x231	8000


Flaking Machine 压胚机

Oil processing equipment - Flaking machine is an automatic embryo rolling machine. It is mainly used for the embryo rolling of vegetable oil, so as to maximize the consistency of embryos, so as to achieve a better oil extraction state of oil seeds.

油加工设备-剥皮机是自动滚胚机，它主要用于植物油滚胚，使生胚的稠度达到最大，以使油籽达到更好的出油状态。

Main Technical Parameters

Model	Capacity (T/24H)	Thickness of Embryo (mm)	Power (KW)	Dimension (cm)	Weight (T)
YYPT2 x 40 x 80	30-40	0.25-0.35	(6-11)*2 KW	--	3000
YYPY2 x 60 x 80	50-60	0.25-0.35	18.5x2+0.37+1.1	180x130x200	4000
YYPY2 x 60 x 100	70-80	0.25-0.35	22x2+0.37+1.1	200x130x200	5000
YYPYFP2 x 80 x 100	120-150	0.25-0.35	30x2+0.55+1.5	225x223x210	10000
YYPYFP2 x 80 x 125	180-200	0.25-0.35	37x2+0.55+1.5	250x223x210	13000
YYPYFP2 x 80 x 150(D)	280-300	0.25-0.35	55x2(90)+0.75x2+2.2	276x223x215	15000
YYPYFP2 x 81 x 220D	450-500	0.25-0.35	160+1.1+1.1+3.0	358x242x236	20000

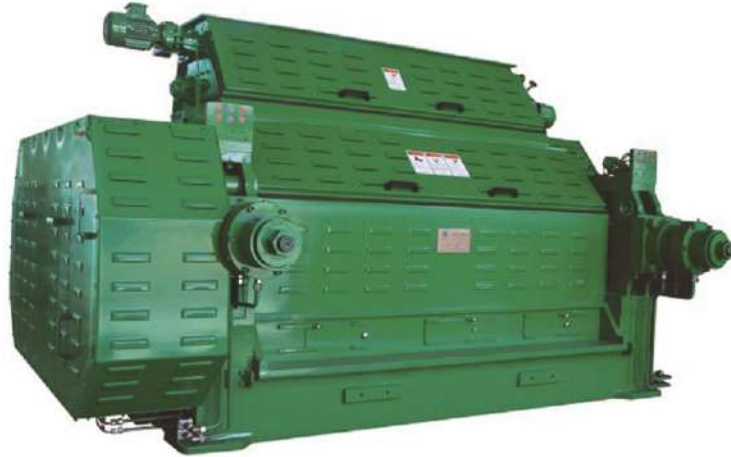

板框过滤机-Press Filter

Press Filter equipment is a simple machine which separates the solid contained in a watery mixture from the oil or the water, in order to recover the water itself and reuse it in any production cycle. The Filter press equipment produces also dry cakes easy to be disposed. The simplicity of the machine guarantees high-efficiency and reliability. There are two kinds of filter plates: cast iron and polypropylene. Simple in operation, safe and labor saving, the whole filter press system are auto controlled by the electrical panel. All devices including feed pump, hydraulic power pack, plate shifting device, valves and conveyors are guided by the logic in PLC, and make them work more efficiently.



Specification is as below 规格如下

Model	Filtration area (m2)	Plate size (mm)	Cake thickness	Filter chamber volume(L)	Plate No. (pcs)	Pressure (MPa)	Motor power(kw)	Weight (kg)	Dimension (mm)
X ^A _m Y4/450-30U	4	500*500	30 (mm)	60	9	≥0.6	2.2	860	1950*700*900
X ^A _m Y6/450-30U	6			91	14			910	2200*700*900
X ^A _m Y8/450-30U	8			121	19			960	2450*700*900
X ^A _m Y10/450-30U	10			151	24			1010	2700*700*900
X ^A _m Y12/450-30U	12			182	29			1060	2950*700*900
X ^A _m Y15/450-30U	15			225	36			1130	3300*700*900
X ^A _m Y16/450-30U	16			243	39			1160	3450*700*900
X ^A _m Y15/630-30U	15			226	18			1725	2640*900*1000
X ^A _m Y20/630-30U	20			297	24			1993	2940*900*1000
X ^A _m Y30/630-30U	30			452	37			2360	3590*900*1000
X ^A _m Y40/630-30U	40	595	49	2788	4300*900*1000				
X ^A _m Y30/800-30U	30	700*700	30 (mm)	460	28	≥0.6	2.2	2170	3700*1200*1200
X ^A _m Y40/800-30U	40			595	38			2450	4300*1200*1200
X ^A _m Y50/800-30U	50			749	47			2700	4840*1200*1200
X ^A _m Y60/800-30U	60			902	57			2980	5440*1200*1200
X ^A _m Y70/800-30U	70			1056	67			3250	6040*1200*1200
X ^A _m Y30/800-30U	30			460	23			2580	3330*1400*1300
X ^A _m Y40/800-30U	40			595	30			2925	3420*1400*1300
X ^A _m Y50/800-30U	50			748	38			3318	4260*1400*1300
X ^A _m Y60/800-30U	60			902	46			3712	4700*1400*1300
X ^A _m Y70/800-30U	70			1056	54			4106	5140*1400*1300
X ^A _m Y80/800-30U	80	1210	62	4561	5580*1400*1300				

Horizontal Oil Filter 卧式过滤机

Horizontal vibration filter is a kind of high efficiency, energy saving, automatic airtight filtration precision clarification equipment. It is widely used in chemical, petroleum, food, pharmaceutical and other industries.

卧式震动过滤机是一种高效、节能、自动密闭过滤的精密澄清设备。它广泛应用于化工、石油、食品、制药等行业。

Usage 应用

- 1) the recovery of dry filter cake, semi dry filter cake and clarification filtrate, Oil Filtration
- 2) chemical industry: sulfur, aluminum sulfate, compound compounds, plastics, dye intermediates, bleaching fluids, lubricating oil additives, polyethylene.
- 3) the food industry: juice, oil, dewaxing and degreasing, decoloration.
 - 1) 干滤饼、半干滤饼及澄清滤液的回收，油脂的过滤
 - 2) 化工：硫磺、硫酸铝、复合物、塑料、染料中间本、漂液、润滑油添加剂、聚乙烯。
 - 3) 食品工业：糖汁、油脂、脱蜡、脱色、脱脂。



Technical parameter 技术参数

Area series 面积系列 (m ²)	Cylinder diameter series 筒体直径系列(mm)	Pressure 压力	working temperature 工作温度 (°C)	Processing capacity about处理能力约 (T/h.m ²)	
25,30,35,40, 45,50,60,70, 80,90,100, 120,140,160, 180,200	1200,1400,1500, 1600,1700,1800, 2000	0.4	150	oil油脂	0.2
				Drinks饮料	0.8

Vertical blade vibration filter 立式叶片振动过滤机

The filter is an efficient, energy-saving and automatic filter equipment. There are three types of oil filters: vertical blade vibration oil filter, press filter and horizontal oil filter. The machine is an ideal filtration equipment for solid-liquid separation in the production process of oil, chemical, light industry, food and medicine.

过滤机是一种高效、节能、自动过滤的过滤设备，过滤机一般分为立式叶片震动过滤机，板框过滤机和卧式过滤机三种，该机是油脂、化工、轻工、食品、医药等行业生产过程中进行固液分离的理想过滤设备。



	NYB-12	NYB-15	NYB-20	NYB-25	NYB-30	NYB-36	NYB-45	NYB-52	NYB-60	NYB-80
过滤面积 M2 Filtration area	12	15	20	25	30	36	45	52	60	80
油脂处理能力 参考 Capacity (T/H)	2-4	3-5	4-6	5-7	6-8	7-9	8-11	9-13	10-15	12-19
最大工作压力 Maximum working pressure (Mpa) 0.45										
设计压力 Design pressure (Mpa) 0.50										
工作温度 °C working temperature ≤150										
振动器和蝶阀机构空气压力 The vibrator and the valve mechanism of air pressure 0.40 ~ 0.60										
滤渣含油 (吹干后) The residue oil (After dried) ≤20%										
油中含杂质 Impurity in oil ≤0.01%(3) ~ 0.0005%										
外形尺寸 长X宽X 高 MM Appearance size length * width * high	1610 ×1250	1710 ×1350	1710 ×1350	1810 ×1430	2030 ×1550	2030 ×1550	2130 ×1560	2230 ×1650	2310 ×1750	3210 ×2100
重量 weight (Kg)	1100	1300	1700	2000	2500	3000	3500	4000	4500	5500

植物油压榨线
Food Oil Pressing Line

Vegetable Oil Physical Pressing Production Line
植物油物理压榨生产线

Our company has developed various types of oil press and physical crushing of vegetable oil with foreign advanced technology, which not only ensures the processing accuracy and efficiency of oil press, but also ensures the quality of oil press and oil production line. Our factory can undertake 1 ton to 1000 tons per 24 hours sunflower seed oil, peanut oil, rapeseed oil, soybean oil, cottonseed oil, corn germ oil, coconut oil, safflower seed oil, palm oil, cashew nut shell oil, animal oil and other oil physical pressing production lines. 我公司采用国外先进技术研发出了多种型号榨油机。植物油物理压榨等全套生产技术，不仅确保榨油机的加工精度和效率，同时也确保了榨油机及油脂生产线等产品的质量。我厂可以承揽1吨到1000吨的葵花籽油，花生油，菜籽油，大豆油，棉籽油，玉米胚芽油，椰子油，红花籽油，棕榈油，腰果壳油，动物油等油脂物理压榨生产线。



植物油压榨线
Food Oil Pressing Line



Vegetable Oil Solvent Extraction Line 植物油溶剂浸出生产线

Solvent leaching production line has the advantages of large capacity and high oil yield, which is suitable for medium and large oil plants.

Our factory can undertake 1 to 1000 tons of sunflower seed oil, peanut oil, rapeseed oil, soybean oil, cottonseed oil, corn germ oil, coconut oil, safflower seed oil, palm oil, cashew shell oil, rice bran oil and other oil crops solvent immersion production line.

我厂可以承揽1吨到1000吨的葵花籽油、花生油、菜籽油、大豆油、棉籽油、玉米胚芽油、椰子油、红花籽油、棕榈油、腰果壳油、米糠油等油料作物的溶剂浸出生产线。溶剂浸出生产线具有处理量大、出油率高的优点，适合中大型厂使用。



Disc Centrifuge 蝶式离心机

Disc oil separator provides personalized solutions for various oil characteristics, so as to realize the optimization of oil products and maximize production capacity.

Successful applications:

Vegetable oils: rapeseed oil, cottonseed oil, corn oil, palm oil, soybean oil, peanut oil, sunflower oil, rice bran oil, sesame oil, safflower oil, etc.

Animal oil: fish oil and fat

purification of various animals.

蝶式油脂分离机针对各种油脂特性提供个性化的解决方案，从而实现油品的最优化，产能的最大化。

成功应用领域:

植物油类: 菜籽油、棉籽油、玉米油、棕榈油、大豆油、花生油、葵花油、米糠油、芝麻油、红花油等。

动物油类: 鱼油、及各种动物的脂肪净化。



Model 机型	Capacity 处理量(L/H)	Import pressure 进口压力(MPa)	出口压力 (MPa)	电机功率 (KW)	重量 (KG)	外形尺寸 长*宽*高 (mm)
DHZ 360	1200-2500	0.05	0.1-0.25	7.5	1280	1500*1150*1500
DHZ 470	2500-7000	0.05	0.1-0.25	15	1880	1800*1200*1800
DHZ 550A	5000-10000	0.05	0.1-0.25	18.5	2200	1850*1550*2050
HPDF 550E	6000-15000	0.05	0.1-0.25	22	2200	1850*1550*2050
HPDF 700	15000-3000	0.1	0.2	30	3300	2100*1650*2300
HPDF 360	1200-2500	0.05	0.1-0.25	5.5	750	1250*1050*1500
HPDF400A	2000-6000	0.05	0.1-0.3	7.5	1150	1300*900*1450
HPDF 400E	4000-7500	0.05	0.1-0.3	7.5	1300	1300*900*1500
HPDF 550	6000-18000	0.05	0.1-0.3	22	2200	1620*1300*2200


Vegetable Oil Refining Line
植物油精炼生产线

Vegetable Oil Refining Line 植物油精炼生产线

Complete refining equipment has the advantages of reasonable design, excellent performance, simple operation, low power consumption, light weight and small occupied area. Compared with other refining equipment, it has the advantages of less investment, quick effect, no need for workshop, no need to lay foundation, and can be used indoors and outdoors.

成套精炼设备具有设计合理,性能优良操作简单,耗电省,重量轻,占地面积小等优点,与其他精炼设备相比,具有投资少,见效快,不需厂房,不需打地基,室内上均可使用。

Process Flow

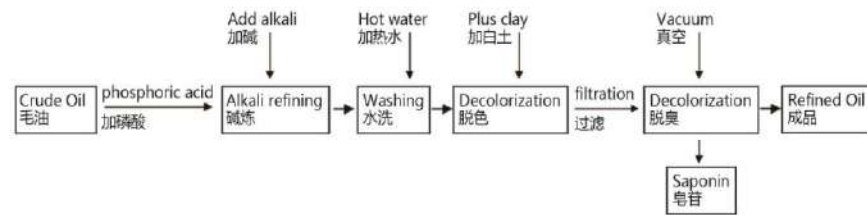

Vegetable Oil Refining Line
植物油精炼生产线



Silo

装配式钢板仓

Grain & Oilseed Silo 装配式筒仓

Assembled steel silo is simply referred to as assembly silo. It is a kind of steel silo assembled by mechanically rolling and moulding corrugated sheet metal, and then using electric torque wrench to connect and assemble it with high-strength bolts. The wall of the assembly warehouse is corrugated. The plate is generally galvanized. The thickness is usually 0.8 to 4.2 mm. At present, the thickness of the warehouse wall can reach 8.4 mm. Most of the corrugated wall panels adopt the rolling process, which is produced in batches by mechanical molding production lines. The production lines can fully produce corrugated panels of various specifications. The advantage of the roll pressing method is that the wave shape is sequentially formed, the internal stress is eliminated, the resilience is small, and the quality of the produced plate is good. Even thicker steel plates can be formed at one time on the assembly line in order. In addition, the forming unit and supporting equipment such as uncoiler, leveler, conveyor roller and hydraulic fixed-size flying shear can directly process the coils into corrugated steel products with required specifications.

装配式钢板仓简称装配仓，它是将机械辊压和横压成波纹型的板材冲孔后，用电动扭矩扳手通过高强度螺栓连接装配而成的一种钢板筒仓。装配仓的壁板成波纹状，板材一般采用镀锌板，其厚度通常为0.8~4.2mm，目前仓壁厚度可以达到8.4 mm。波纹型的壁板大多采用辊压法工艺流程，由机械成型生产线成批生产，生产线可以全自动制作各种规格的波纹板。

辊压法的优点是波型逐次成型，内部应力得以消除，回弹性小，生产的板型质量较好，即使较厚一点的钢板也可以在成型机组流水线上按顺序一次成型。另外成型机组与开卷机、校平机、输送辊道及液压定尺飞剪等配套设备可以直接把卷板加工成需要规格的波纹型钢板制品。

装配式筒仓优点：

- 1.重量轻
是同容量混凝土仓重量的1/4-1/5。
- 2.模具化生产
在工厂按照同一标准模具化生产，标准化程度高。
- 3.互换性好
仓体全部由高强度螺栓装配而成，可以实现互换功能。
- 4.容量范围大
可以制作从5t-16000t单仓容量类型钢板仓。



Silo 装配式钢板仓

