



PVC

HEAVY DUTY RED LAYFLAT

Suitable for mines, construction and light duty tow irrigation.

CONSTRUCTION

3 Ply polyester yarns.

Both tube and cover are extruded simultaneously to obtain maximum bonding.

Flame resistant available on request.

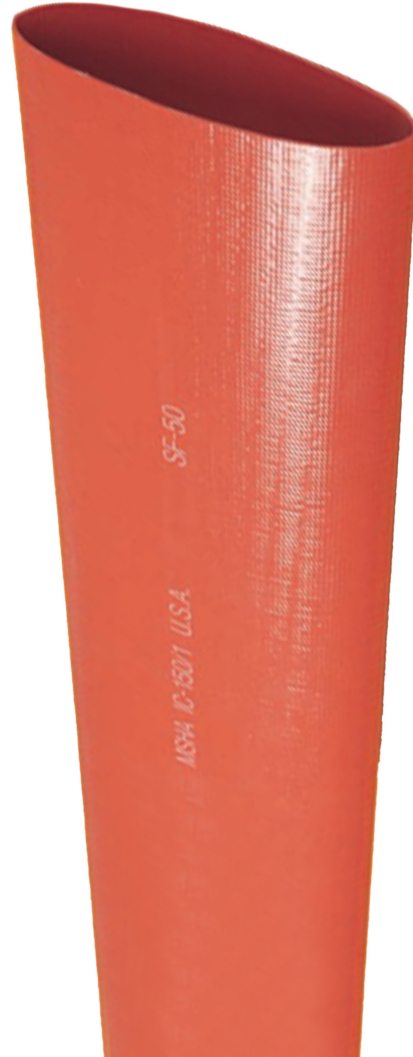
USMSHA IC-150/1, (sizes 1-1/2", 2", 2-1/2").




TEMP RANGE

-20°C to + 76°C.

STANDARD LENGTH

91.46 metres.



| Part Number |  ID mm |  Std Length m/coil |  WP PSI @20°C |
|-------------|--|--|---|
| 10.038SF50 | 38 | 91.46 | 150 |
| 10.050SF50 | 50 | 91.46 | 150 |
| 10.063SF50 | 63 | 91.46 | 150 |
| 10.075SF50 | 75 | 91.46 | 150 |
| 10.100SF50 | 100 | 91.46 | 150 |
| 10.150SF50 | 150 | 91.46 | 150 |
| 10.200SF50 | 200 | 91.46 | 115 |