

AWG	#16	#18	#20	#22	#24	#26
D	<1.8	<1.8	<1.5	<1.2	<1.0	<1.0

TWISTED
 TWISTED & HALF TIN DIPPED
 TWISTED & FULL TIN DIPPED

MODEL 520/620GM Tolerance
 CUSTOMER -0 /+30 mm

所有編織網都改為3股編織的黑色編織網, WLRT2S140DW除外

24-4p Housing: 只能用 WST P24-I42002K8 BLACK


Pin#

12	4	670	UL1007	AWG18	ORANGE
11	4	610	UL1007	AWG18	YELLOW
10	4	610	UL1007	AWG18	YELLOW
9	4	680	UL1007	AWG18	PURPLE
8	4	690	UL1007	AWG20	GRAY
7	4	680	UL1007	AWG18	BLACK
6	4	650	UL1007	AWG18	RED
5	4	640	UL1007	AWG18	BLACK
4	4	650	UL1007	AWG18	RED
3	4	640	UL1007	AWG20	BLACK
2	4	670	UL1007	AWG20	ORANGE
1	4	670	UL1007	AWG18	ORANGE

2	4	710	UL1007	AWG26	ORANGE
---	---	-----	--------	-------	--------

24	4	640	UL1007	AWG18	BLACK
23	4	650	UL1007	AWG18	RED
22	4	650	UL1007	AWG18	RED
21	4	650	UL1007	AWG18	RED


19	4	640	UL1007	AWG18	BLACK
18	4	640	UL1007	AWG18	BLACK
17	4	640	UL1007	AWG18	BLACK
16	4	675	UL1007	AWG20	GREEN
15	4	640	UL1007	AWG18	BLACK
14	4	680	UL1007	AWG20	BLUE
13	4	670	UL1007	AWG18	ORANGE

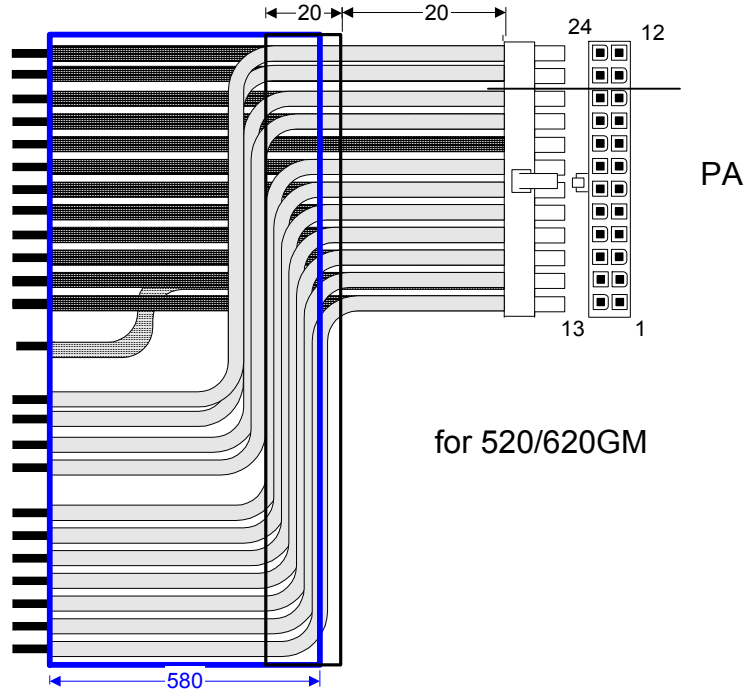

for 520/620GM

[B] [A]

4	630	UL1007	AWG18	BLACK
4	630	UL1007	AWG18	BLACK
4	630	UL1007	AWG18	BLACK
4	630	UL1007	AWG18	BLACK
4	600	UL1007	AWG18	YELLOW
4	600	UL1007	AWG18	YELLOW
4	600	UL1007	AWG18	YELLOW
4	600	UL1007	AWG18	YELLOW

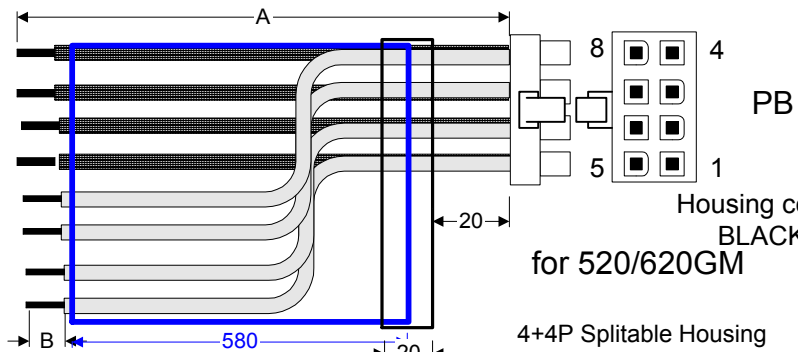


Housing color: BLACK
for 520/620GM

4+4P Splittable Housing
WST P4-I42002K3B+P4-I42002K4B
or Equivalent

[B] [A]

4	630	UL1007	AWG18	BLACK
4	630	UL1007	AWG18	BLACK
4	630	UL1007	AWG18	BLACK
4	630	UL1007	AWG18	BLACK
4	600	UL1007	AWG18	YELLOW
4	600	UL1007	AWG18	YELLOW
4	600	UL1007	AWG18	YELLOW
4	600	UL1007	AWG18	YELLOW

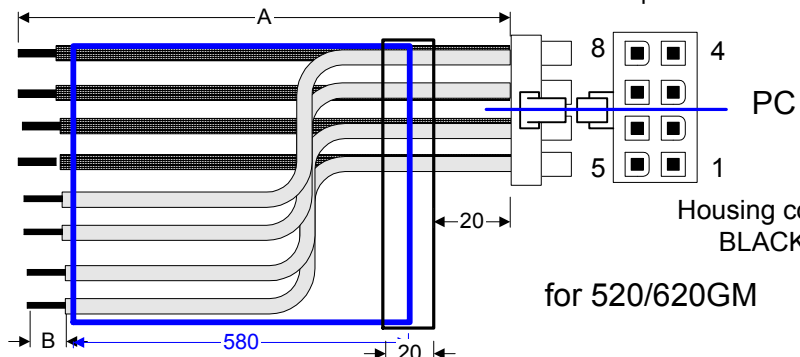


Housing color: BLACK
for 520/620GM

PA黃色線1條與PB黃色線4條,共5條打一個Hook
 PA黃色線1條與PC黃色線4條,共5條打一個Hook
 PA紅色線五條打一個Hook
 PA橘色線四條打一個Hook
 PA,PB,PC 15條黑色線打3個個Hook, PA Pin7不打與Pin9(紫色)絞線
 除了AWG26之外,其餘單線打單鉤Hook
 PA,PB,PC 三條線合為一個料號:WEX248GB4CW

2010.2.23

紫色線Hook的PVC段,增加熱縮套管,輸出線料號改C版

Housing: Black
JS-1149S-5
or Equivalent

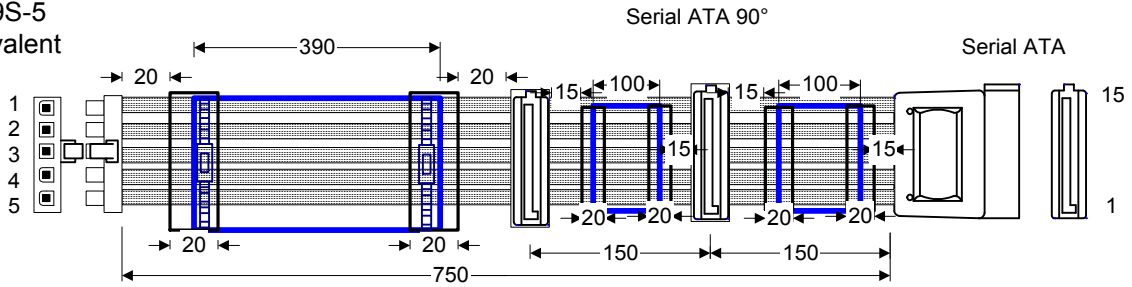


1	UL1007	AWG18	YELLOW
2	UL1007	AWG18	RED
3	UL1007	AWG18	ORANGE
4	UL1007	AWG18	BLACK
5	UL1007	AWG18	BLACK

13,14,15
7,8,9
1,2,3
4,5,6
10,11,12

180度SATA用端子式Housing
WGM13T750AW
for 520GM for 620GM
Q'ty : 2 pcs Q'ty : 3 pcs

Molex part # 4555590002 or equivalent

Housing Color : Black

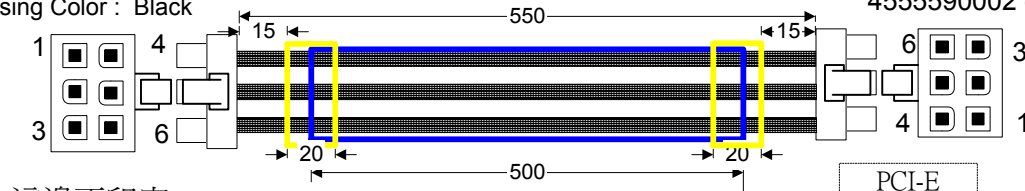

這邊不印字

1	UL1007	AWG18	YELLOW
2	UL1007	AWG18	YELLOW
3	UL1007	AWG18	YELLOW
4	UL1007	AWG18	BLACK
5	UL1007	AWG18	BLACK
6	UL1007	AWG18	BLACK

3
2
1
6
5
4

Molex part #:
4555590002 or equivalent

Housing Color :
Black

PCI-E

Print on housing.

for 520/620GM
Q'TY: 1 pcs


WPM11P55YCW

印刷 範例



Molex part # 4555590002 or equivalent

Housing Color : Black

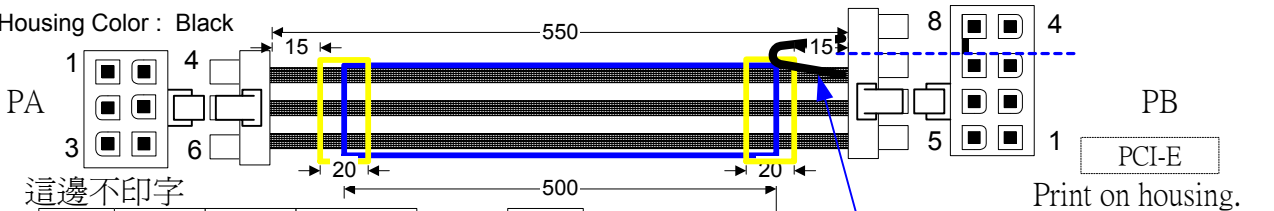

這邊不印字

PA-1	UL1007	AWG18	YELLOW
PA-2	UL1007	AWG18	YELLOW
PA-3	UL1007	AWG18	YELLOW
PA-4	UL1007	AWG18	BLACK
PA-5	UL1007	AWG18	BLACK
PA-6	UL1007	AWG18	BLACK

PB-3
PB-2
PB-1
PB-7
PB-6
PB-5

connected

UL1007	AWG18	BLACK
UL1007	AWG18	BLACK

PB-8
PB-4

for 520/620GM
Q'TY: 1 pcs

P/N:WPM11P55YGW

連接黑線的長度,以最短可作業長度為準

6+2P的6P膠殼改為 WST P6-I4200K21
6+2P輸出線料號改WPM11P55YGW 2008.6.3 變更

WIRING HARNESS

DOC No	FB-EX-GM5	REV	B1
Date	2010.2.23	UNIT	mm
P/N			

MODEL	520/620GM	Tolerance	-0 /+30 mm
CUSTOMER			

