

**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOE AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE AND MUST BE RETURNED TO BOE UPON ITS REQUEST

TITLE : NE140FHM-N61 V8.0

Product Specification

Rev. P1

BOE Optoelectronics Technology Co., Ltd

SPEC. NUMBER	PRODUCT GROUP	Rev.	ISSUE DATE	PAGE
B82018060	TFT-LCD	P1	2018.08.17	1 OF 34

B2014-Q011-O (1/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

REVISION HISTORY

(√) Preliminary Specification

Revision No.	Page	Description of Changes	Date	Prepared
P0		Initial Release	2018.05.04	Yang Jun
P1	5,8,10	Update Power/Current/ Luminance	2018.08.17	Tan Sen

REVIEWED

Designer	Manager
Fu Pengcheng(Array)	Wang Rui
Huang Daolong(Cell)	Hu Jingyong
Zeng Ya(CF)	Li Min
Zeng Fanjian(EE)	Lu Xu
Tan Sen(MO)	Gao Liang
Cui Chaoyang(QE)	Huang Yuan
Sun He(PI)	Wang Zhihui

APPROVED

Wang Yang(PM)

SPEC. NUMBER	SPEC. TITLE	PAGE
B82018060	NE140FHM-N61 V8.0 Product Specification Rev. P1	2 OF 34

B2014-Q011-O (2/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

Contents

No.	Items	Page
1.0	General Description	4
2.0	Absolute Maximum Ratings	6
3.0	Electrical Specifications	7
4.0	Optical Specifications	10
5.0	Interface Connection	15
6.0	Signal Timing Specification	19
7.0	Input Signals, Display Colors & Gray Scale of Colors	21
8.0	Power Sequence	22
9.0	Connector Description	23
10.0	Mechanical Characteristics	24
11.0	Reliability Test	25
12.0	Handling & Cautions	25
13.0	Label	26
14.0	Packing Information	28
15.0	Mechanical Outline Dimension	29
16.0	EDID Table	31

SPEC. NUMBER

SPEC. TITLE

PAGE

B82018060

NE140FHM-N61 V8.0 Product Specification Rev. P1

3 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

1.0 GENERAL DESCRIPTION

1.1 Introduction

NE140FHM-N61 V8.0 is a color active matrix TFT LCD module using IGZO TFT's (Thin Film Transistors) as an active switching devices. This module has a 14.0 inch diagonally measured active area with Full-HD resolutions (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.2M(6bit+FRC) colors and color gamut 72%. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED driver for back-light driving is built in this model.

All input signals are eDP1.4 interface compatible.

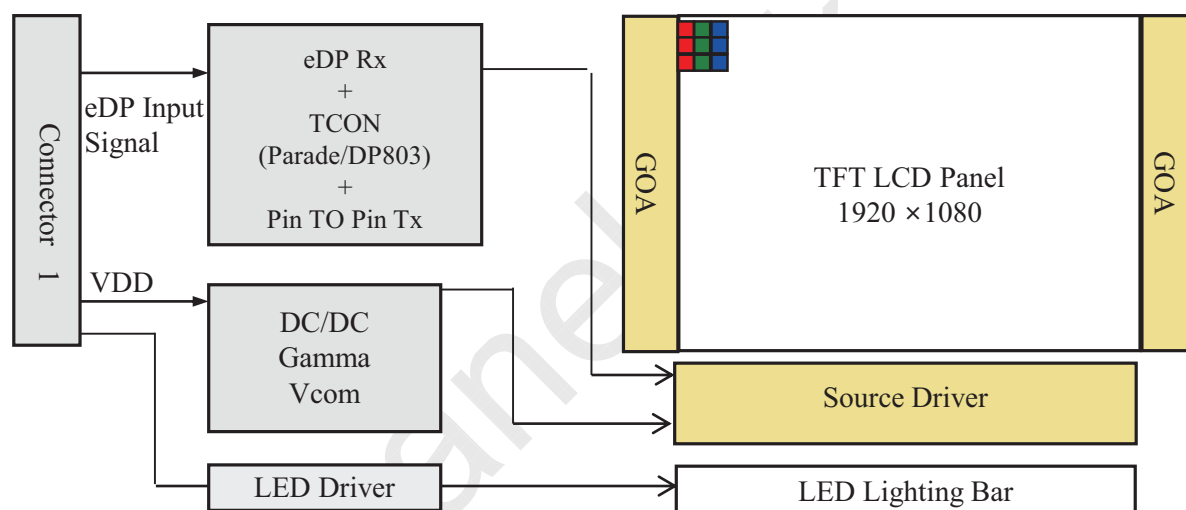


Figure 1. Drive Architecture

1.2 Features

- 2 lane eDP interface with 2.7Gbps link rates
- Thin and light weight
- 16.2M(6bit+FRC) color depth, color gamut 72%
- Single LED lighting bar (Bottom side/Horizontal Direction)
- Data enable signal mode
- Side mounting frame
- Green product (RoHS & Halogen free product)
- On board LED driving circuit
- Low driving voltage and low power consumption
- On board EDID chip

SPEC. NUMBER

B82018060

SPEC. TITLE

NE140FHM-N61 V8.0 Product Specification Rev. P1

PAGE

4 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

1.3 Application

- Notebook PC (Wide type)

1.4 General Specification

The followings are general specifications at the model NE140FHM-N61 V8.0. (listed in Table 1)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	309.312(H) × 173.988(V)	mm	
Number of pixels	1920 (H) × 1080 (V)	pixels	
Pixel pitch	161.1(H) × 161.1(V)	um	
Pixel arrangement	RGB Vertical stripe		
Display colors	16.2M(6bit+FRC)		
Color gamut	72%		
Display mode	Normally Black		
Dimensional outline	315.312 (H)×196.1(V)×2.4 (max)	mm	
Weight	215(max)	g	
Surface treatment	Anti-Glare		
Surface hardness	3H		
Back-light	Bottom edge side, 1-LED lighting bar type		Note 1
Power consumption	P _D : 0.7	W	@Mosaic
	P _{BL} : 2.2	W	@max
	P _{Total} : 2.9	W	@Mosaic

Notes : 1. LED Lighting Bar (60*LED Array)

SPEC. NUMBER

SPEC. TITLE

PAGE

B82018060

NE140FHM-N61 V8.0 Product Specification Rev. P1

5 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings >

Ta=25+/-2°C

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	-0.3	4.0	V	Note 1
Logic Supply Voltage	V _{IN}	V _{SS} -0.3	V _{DD} +0.3	V	
Operating Temperature	T _{OP}	0	+50	°C	Note 2
Storage Temperature	T _{ST}	-20	+60	°C	

Notes :

1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.

2. Temperature and relative humidity range are shown in the figure below.

95 % RH Max. (40 °C ≥ Ta) Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

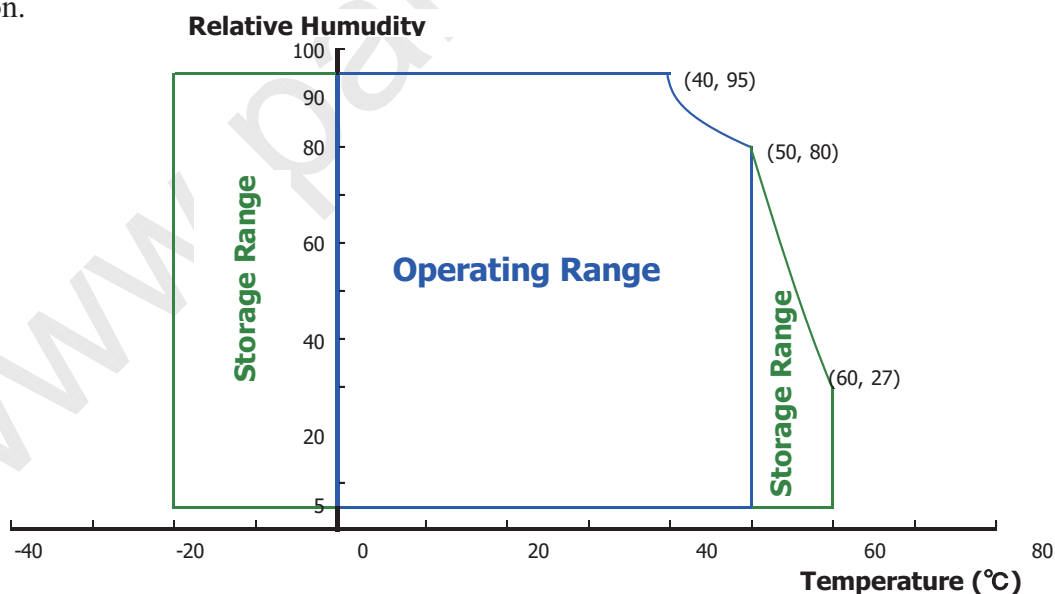


Figure 2. Temperature and Relative Humidity Range

SPEC. NUMBER

SPEC. TITLE

PAGE

B82018060

NE140FHM-N61 V8.0 Product Specification Rev. P1

6 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 3. Electrical Specifications >

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V _{RF}	-	-	100	mV	@ V _{DD} = 3.3V
BIST Control Level	High Level	2	-	3.6	V	
	Low Level	0	-	0.6	V	
Power Supply Current	I _{DD}	-	212	334	mA	Note 1
Power Supply Inrush Current	Inrush	-	-	1.5	A	Note3
Power Consumption	P _D	-	0.7	1.1	W	Note 1
	P _{BL}	-	-	1.7	W	Note 2
	P _{total}	-	2.4	2.8	W	Note 1

Notes :

- The supply voltage is measured and specified at the interface connector of LCM.
The current draw and power consumption specified is for 3.3V at 25 °C.

a) Typ : Mosaic pattern 8*8

b) Max : R/G/B patterns



(a)

(b)

Figure 3. Power Measure Patterns

- Calculated value for reference (V_{LED} × I_{LED})
- Measure condition (Figure 4)

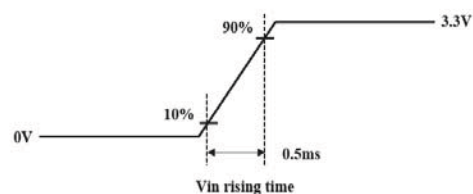


Figure 4. Inrush Measure Condition

SPEC. NUMBER

B82018060

SPEC. TITLE

NE140FHM-N61 V8.0 Product Specification Rev. P1

PAGE

7 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

3.2 Backlight Unit

< Table 4. LED Driving Guideline Specifications >

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
LED Forward Voltage	V_F	-	-	2.85	V	
LED Forward Current	I_F	-	11.2	-	mA	
LED Power Consumption	P_{LED}	-	-	2.2	W	Note 1
LED Life-Time	N/A	15,000	-	-	Hour	$I_F = 20mA$
Power Supply Voltage for LED Driver	V_{LED}	5	12	21	V	
Power Supply Voltage for LED Driver Inrush	I_{led} inrush	-	-	1.5	A	Note 4
EN Control Level	Backlight On	2.5	-	5.0	V	
	Backlight Off	0	-	0.6	V	
PWM Control Level	High Level	2.5	-	5.0	V	
	Low Level	0	-	0.6	V	
PWM Control Frequency	F_{PWM}	200	-	10,000	Hz	
Duty Ratio		1	-	100	%	Note 3

Notes :

1. Power supply voltage 12V for LED driver.

Calculator value for reference $I_F \times V_F \times 60 / \text{driver efficiency} = P_{LED}$

2. The LED life-time define as the estimated time to 50% degradation of initial luminous.

3. 1% duty cycle is achievable with a dimming frequency less than 2KHz.

4. Measure condition (Figure 5)

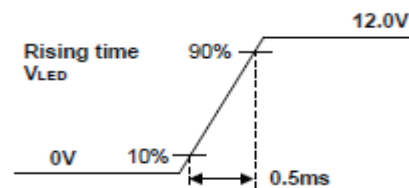


Figure 5. Inrush Measure Condition

SPEC. NUMBER

SPEC. TITLE

PAGE

B82018060

NE140FHM-N61 V8.0 Product Specification Rev. P1

8 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)



BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

3.3 LED Structure

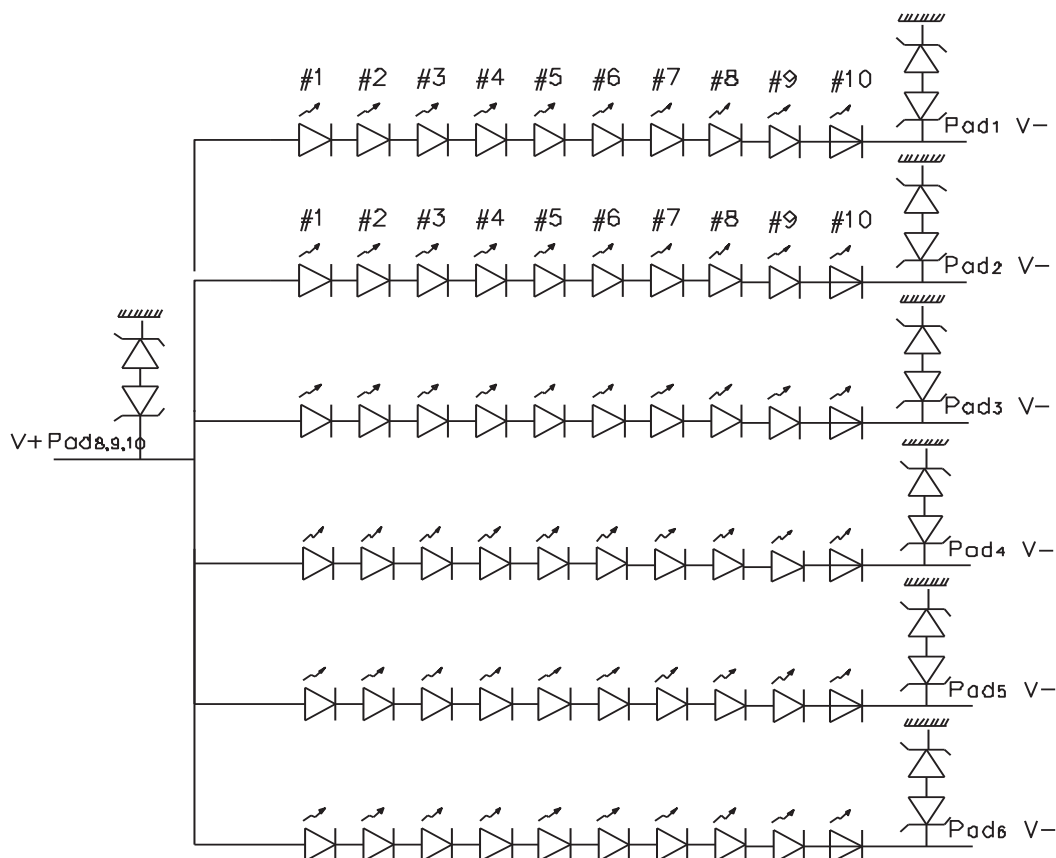


Figure 6. LED Structure

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 9 OF 34
---------------------------	--	-----------------

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of luminance meter system (PR730&PR810) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta=0$ ($=\theta_3$) as the 3 o'clock direction (the "right"), $\theta=90$ ($=\theta_{12}$) as the 12 o'clock direction ("upward"), $\theta=180$ ($=\theta_9$) as the 9 o'clock direction ("left") and $\theta=270$ ($=\theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or Φ , the center of the measuring spot on the display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be $3.3 \pm 0.3\text{V}$ at 25°C . Optimum viewing angle direction is 6 o'clock.

4.2 Optical Specifications

<Table 5. Optical Specifications>

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle Range	Horizontal	θ_3	CR > 10	80	85	-	Deg.	Note 1
		θ_9		80	85	-	Deg.	
	Vertical	θ_{12}		80	85	-	Deg.	
		θ_6		80	85	-	Deg.	
Luminance Contrast Ratio		CR	$\theta = 0^\circ$	1000	1500	-		Note 2
Luminance of White	5 Points	Y_w	$\theta = 0^\circ$ $I_{LED} = 11.2\text{mA}$	340	400	-	cd/m ²	Note 3
White Luminance Uniformity	5 Points	ΔY_5		80	-	-		Note 4
	13 Points	ΔY_{13}		60	-	-		
White Chromaticity		W_x	$\theta = 0^\circ$	0.283	0.313	0.343		Note 5
		W_y		0.299	0.329	0.359		
Reproduction of Color	Red	R_x	$\theta = 0^\circ$	-0.03	0.650	+0.03		
		R_y			0.343			
	Green	G_x			0.320			
		G_y			0.623			
	Blue	B_x			0.154			
		B_y			0.072			
Color Gamut				-	72	-	%	
Response Time (Rising + Falling)		T_{RT}	$T_a = 25^\circ\text{C}$ $\theta = 0^\circ$	-	35	40	ms	Note 6
Cross Talk		CT	$\theta = 0^\circ$	-	-	2.0	%	Note 7

SPEC. NUMBER

SPEC. TITLE

PAGE

B82018060

NE140FHM-N61 V8.0 Product Specification Rev. P1

10 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

Notes :

- Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see Figure 7).
- Contrast measurements shall be made at viewing angle of $\Theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state . (see Figure 7) Luminance Contrast Ratio (CR) is defined mathematically.


$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

- Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in Figure 8 for a total of the measurements per display.
- The White luminance uniformity on LCD surface is then expressed as : $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points.}$ (see Figure 8 and Figure 9).
- The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
- The electro-optical response time measurements shall be made as Figure 10 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_r , and 90% to 10% is T_r .
- Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark. (See Figure 11).

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 11 OF 34
---------------------------	--	------------------

	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

4.3 Optical Measurements

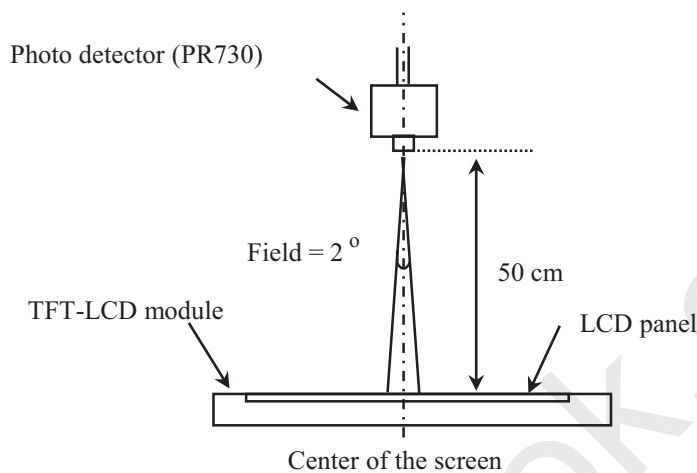

Optical characteristics measurement setup

Figure 7. Measurement Set Up

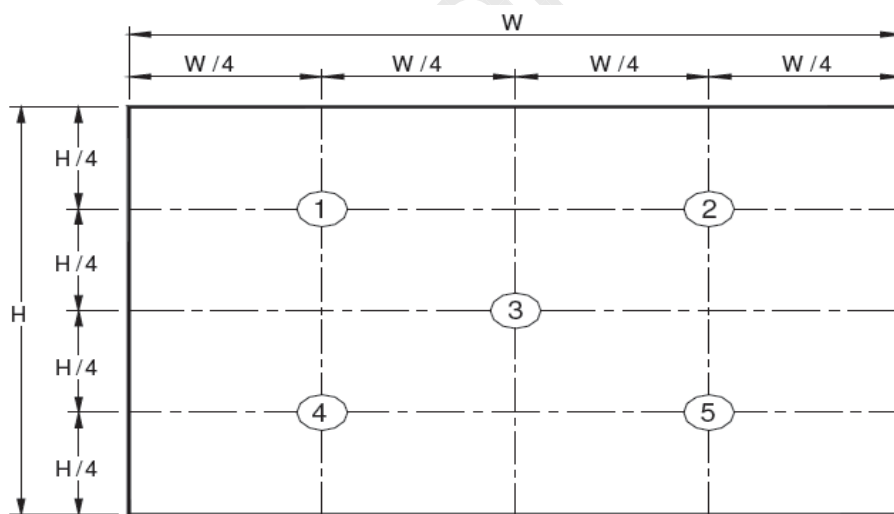


Figure 8. White Luminance and Uniformity Measurement Locations (5 points)

Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in Figure 7 for a total of the measurements per display.

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 12 OF 34
---------------------------	--	------------------

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

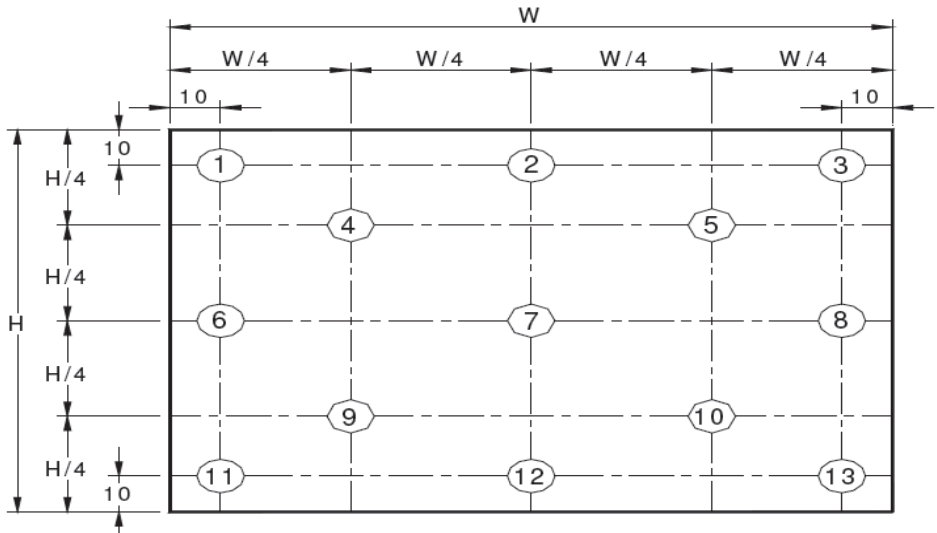


Figure 9. Uniformity Measurement Locations (13 points)

The White luminance uniformity on LCD surface is then expressed as : $\Delta Y5$ = Minimum Luminance of five points / Maximum Luminance of five points (see Figure 8) , $\Delta Y13$ = Minimum Luminance of 13 points /Maximum Luminance of 13 points (see Figure 9).

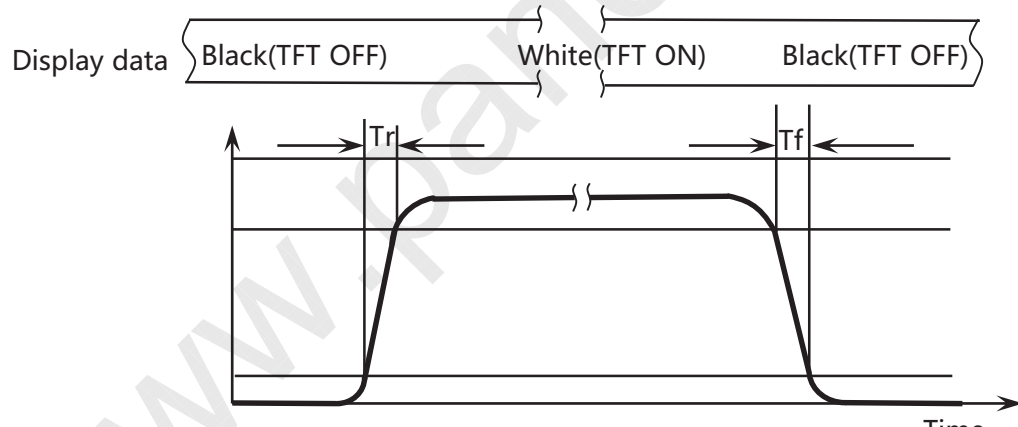



Figure 10. Response Time Testing

The electro-optical response time measurements shall be made as shown in Figure 10 by switching the “data” input signal ON and OFF. Tr: The luminance to change from 90% to 10% ,Tf: The luminance to change from 10% to 90% .

The test system : PR810

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 13 OF 34
---------------------------	--	------------------

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

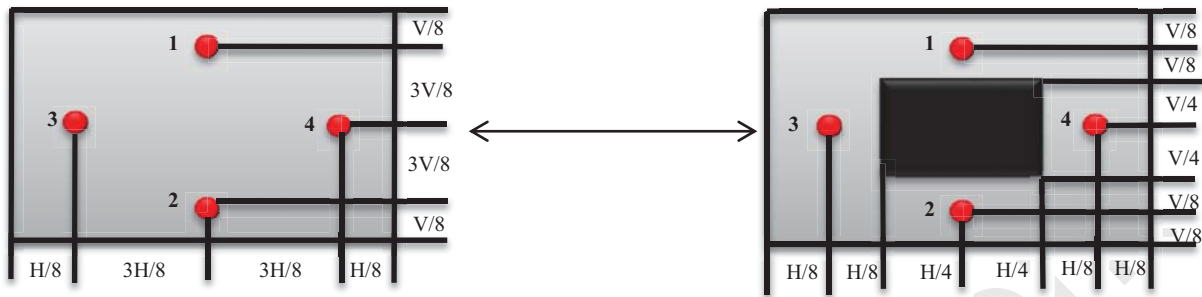

$$\text{Cross Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Figure 11. Cross Talk Modulation Test Description

Where:

Y_A = Initial luminance of measured area (cd/m²)

Y_B = Subsequent luminance of measured area (cd/m²)

The location 1/2/3/4 measured will be exactly the same in both patterns. The test background gray is from L64 to L192. Take the largest data as the result.

Cross Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark. (Refer to Figure 11)

The test system: PR730

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 14 OF 34
---------------------------	--	------------------

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

5.0 INTERFACE CONNECTION**5.1 Electrical Interface Connection**

The electronics interface connector is IPEX 20455-030E-66.

The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>

Terminal	Symbol	Functions
Pin No.	Symbol	Description
1	NC	NC
2	H_GND	Ground
3	LANE1_N	eDP RX Channel 1 Negative
4	LANE1_P	eDP RX Channel 1 Positive
5	H_GND	Ground
6	LANE0_N	eDP RX Channel 0 Negative
7	LANE0_P	eDP RX Channel 0 Positive
8	H_GND	Ground
9	AUX_CH_P	eDP AUX CH Positive
10	AUX_CH_N	eDP AUX CH Negative
11	H_GND	Ground
12	LCD_VCC	Power Supply, 3.3V (typ.)
13	LCD_VCC	Power Supply, 3.3V (typ.)
14	BIST	Panel Self Test Enable
15	H_GND	Ground
16	H_GND	Ground
17	HPD	Hot Plug Detect Output
18	BL_GND	LED Ground
19	BL_GND	LED Ground
20	BL_GND	LED Ground
21	BL_GND	LED Ground
22	BL_ENABLE	LED Enable Pin(+3.3V Input)
23	BL_PWM	System PWM Signal Input
24	H_sync	Line synchronization
25	NC	No Connection
26	BL_POWER	LED Power Supply 5V-21V
27	BL_POWER	LED Power Supply 5V-21V
28	BL_POWER	LED Power Supply 5V-21V
29	BL_POWER	LED Power Supply 5V-21V
30	NC	No Connection

SPEC. NUMBER

SPEC. TITLE

PAGE

B82018060

NE140FHM-N61 V8.0 Product Specification Rev. P1

15 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)



BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

5.2 eDP Interface

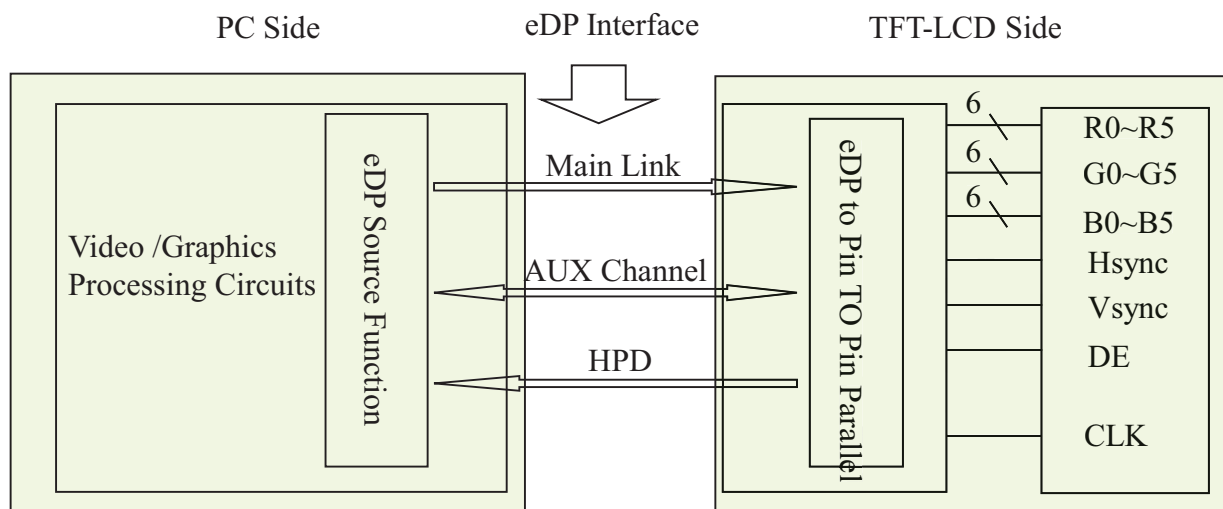


Figure 12. eDP Interface Architecture

Note:

Transmitter : Parade DP501 or equivalent.
 Transmitter is not contained in module.

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 16 OF 34
---------------------------	--	------------------

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

5.3 Data Input Format

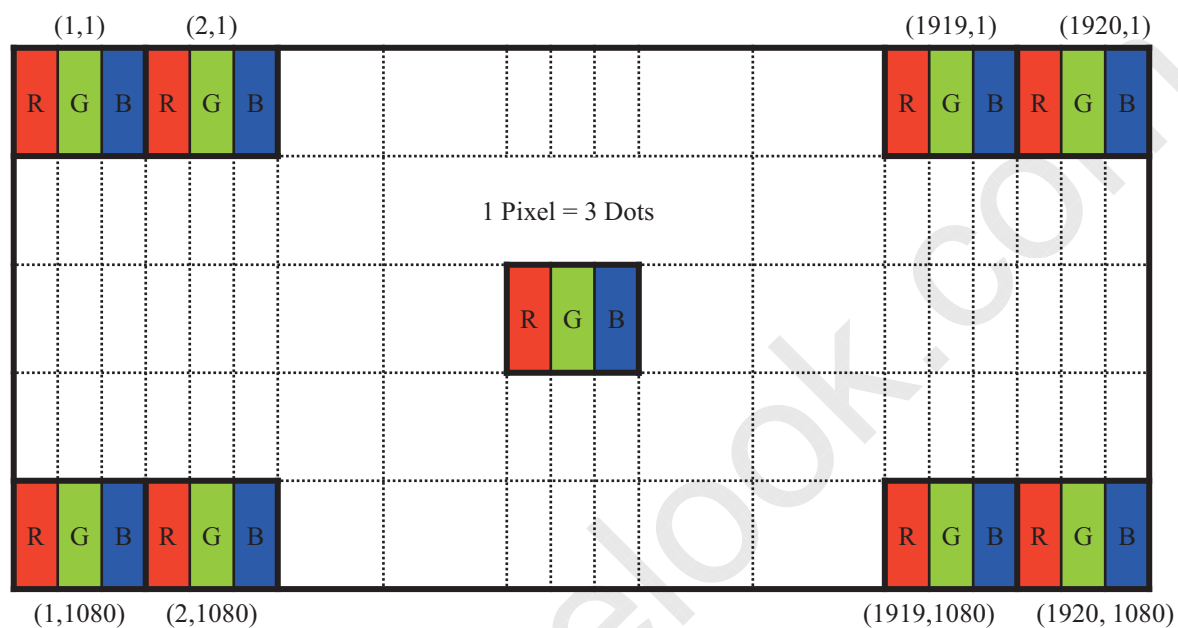


Figure 13. Display Position of Input Data (V-H)

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 17 OF 34
---------------------------	--	------------------

B2014-Q011-O (3/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

5.5 Back-light & LCM Interface Connection

BLU Interface Connector: STM MSK24022P10D.

<Table 7. Pin Assignments for the BLU Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	LED	LED cathode connection	6	LED	LED cathode connection
2	LED	LED cathode connection	7	NC	No Connection
3	LED	LED cathode connection	8	Vout	LED anode connection
4	LED	LED cathode connection	9	Vout	LED anode connection
5	LED	LED cathode connection	10	Vout	LED anode connection

SPEC. NUMBER

B82018060

SPEC. TITLE

NE140FHM-N61 V8.0 Product Specification Rev. P1

PAGE

18 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

6.0 SIGNAL TIMING SPECIFICATION**6.1 The NE140FHM-N61 V8.0 Is Operated By The DE Only**

< Table 8. Signal Timing Specification >

Item		Symbols	Min	Typ	Max	Unit
Clock	Frequency	1/Tc	142.7	143.9	145.1	MHz
Frame Period		Tv	1115	1120	1125	lines
			-	60	-	Hz
			-	16.67	-	ms
Vertical Display Period		Tvd	-	1080	-	lines
One line Scanning Period		Th	2134	2142	2150	clocks
Horizontal Display Period		Thd	-	1920	-	clocks

Note : The above is as optimized setting.

SPEC. NUMBER

B82018060

SPEC. TITLE

NE140FHM-N61 V8.0 Product Specification Rev. P1

PAGE

19 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

6.2 eDP Rx Interface Timing Parameter

The specification of the eDP Rx interface timing parameter is shown in Table 9.

<Table 9. eDP Main-Link RX TP4 Package Pin Parameters>

Item	Symbol	Min	Typ	Max	Unit	Remark
Spread spectrum clock (Link clock down-spreading)	ssc	-	0.5	-	%	
Differential peak-to-peak input voltage at package pins	VRX-DIFFp-p	100	-	1320	mV	
Rx input DC common mode voltage	VRX_DC_CM	-	GND	-	V	
Differential termination resistance	RRX-DIFF	80	100	120	Ω	
Single-ended termination resistance	RRX-SE	40	-	60	Ω	
Rx short circuit current limit	IRX_SHORT	-	-	20	mA	
Intra-pair skew at Rx package pins (HBR) RX intra-pair skew tolerance at HBR	LRX_SKEW_ INTRA_PAIR	-	-	150	ps	

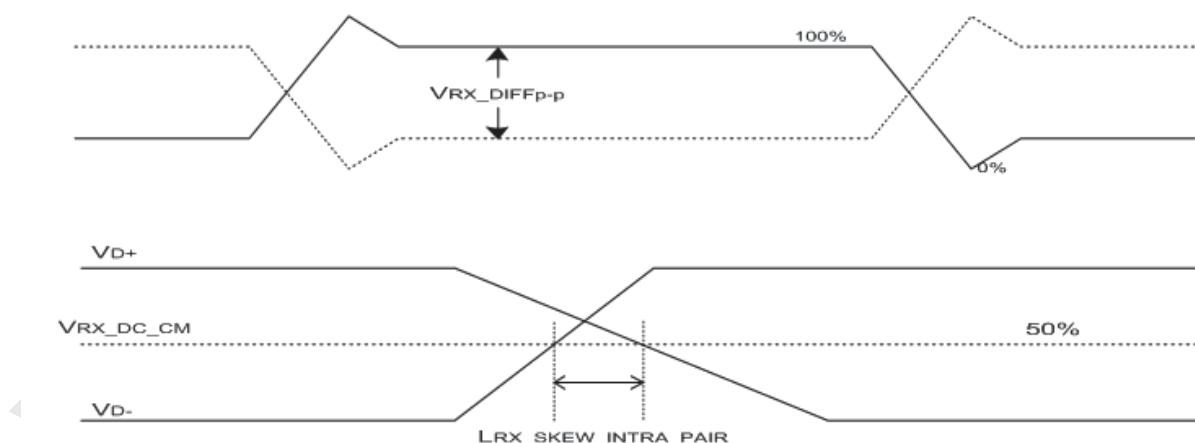


Figure 14. VRX-DIFFp-p & LRX_SKEW_INTRA_PAIR

SPEC. NUMBER

B82018060

SPEC. TITLE

NE140FHM-N61 V8.0 Product Specification Rev. P1

PAGE

20 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)



BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

<Table 10. Input Signal & Basic Display Colors & Gray Scale of Colors >

	Colors & Gray scale	Data signal																							
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Light Blue	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Purple	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△					↑								↑										↑	
	▽					↓								↓										↓	
	Brighter	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
▽	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Gray scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△					↑								↑										↑	
	▽					↓								↓										↓	
	Brighter	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0
▽	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	
Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	
Gray scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	△					↑								↓										↑	
	▽					↓								↓										↓	
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1
▽	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	
Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	
Gray scale of White & Black	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	△					↑								↑										↑	
	▽					↓								↓										↓	
	Brighter	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1
▽	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	
White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 21 OF 34
---------------------------	--	------------------



BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below.

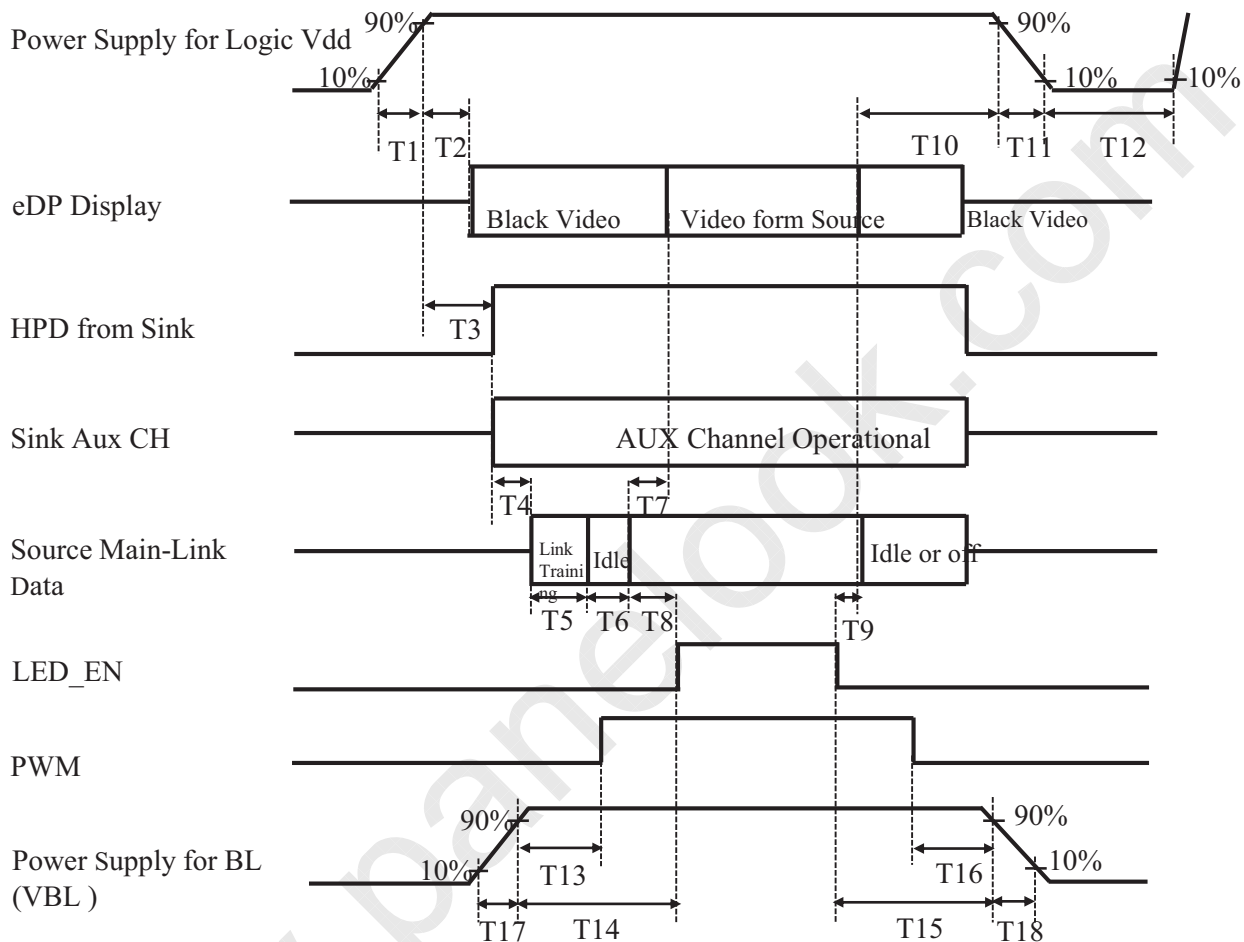


Figure 15. Power Sequence

- 0.5ms ≤ T1 ≤ 10 ms
- 0ms < T2 ≤ 200 ms
- 0ms < T3 ≤ 200 ms
- T3+T4+T5+T6+T8>200ms
- 0ms < T7 ≤ 50ms
- T7 < T8
- 0ms < T9
- 0ms < T10 < 500 ms
- 0.5ms ≤ T11 ≤ 10 ms
- (Figure 16)
- 500ms ≤ T12
- 0ms < T13
- 0ms < T14
- 0ms < T15
- 0ms < T16
- 0.5ms ≤ T17
- 0.5ms ≤ T18

Notes:

1. When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
2. Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 22 OF 34
---------------------------	--	------------------

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

Power Supply for Logic Vdd

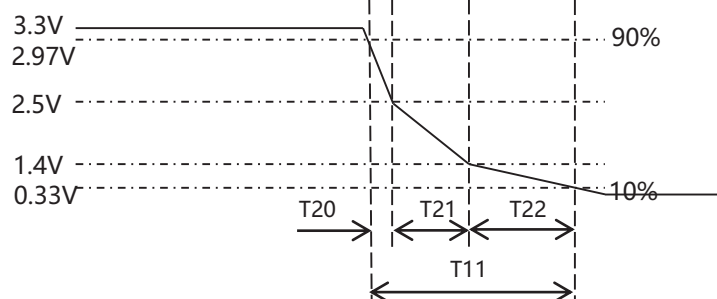


Figure 16. T11 timing requirements

- $0.5\text{ms} \leq T11 \leq 10\text{ms}$
- $0.225\text{ms} \leq T21$
- $T11 = T20 + T21 + T22$

9.0 Connector Description

Physical interface is described as for the connector on LCM.

These connectors are capable of accommodating the following signals and will be following components.

9.1 TFT LCD Module

< Table 11. Signal Connector >

Connector Name /Description	For Signal Connector
Manufacturer	IPEX
Type/ Part Number	20455-030E-66
Mating Housing/ Part Number	I-PEX 20454-030T

SPEC. NUMBER

B82018060

SPEC. TITLE

NE140FHM-N61 V8.0 Product Specification Rev. P1

PAGE

23 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

10.0 MECHANICAL CHARACTERISTICS**10.1 Dimensional Requirements**

Figure 21 shows mechanical outlines for the model NE140FHM-N61 V8.0.
Other parameters are shown in Table 12.

<Table 12. Dimensional Parameters>

Parameter	Specification	Unit
Active Area	309.312 (H) × 173.988 (V)	mm
Number of pixels	1920 (H) × 1080 (V) (1 pixel = R + G + B dots)	pixels
Pixel pitch	161.1 (H) × 161.1(V)	um
Pixel arrangement	RGB Vertical stripe	
Display colors	16.2M(6bit+FRC)	
Display mode	Normally Black	
Dimensional outline	315.312((H)*196.1(V) *2.4(Max) (W/PCB) 315.312((H)*186.14(V) *2.4(Max) (W/O PCB)	mm
Weight	215 (max)	g

10.2 Mounting

See Figure 21.

10.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an Anti-Glare coating to minimize reflection and a coating to reduce scratching.

10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 250lux.

SPEC. NUMBER

SPEC. TITLE

PAGE

B82018060

NE140FHM-N61 V8.0 Product Specification Rev. P1

24 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P1

2018.08.17

11.0 RELIABILITY TEST

The reliability test items and its conditions are shown in below.

<Table 13. Reliability Test>

No	Test Items	Conditions
1	High temperature storage test	Ta = 60°C , 60%RH, 240 hrs
2	Low temperature storage test	Ta = -20°C , 240 hrs
3	High temperature & high humidity operation test	Ta = 50°C , 80%RH, 240 hrs
4	High temperature operation test	Ta = 50°C , 60%RH, 240 hrs
5	Low temperature operation test	Ta = 0°C , 240 hrs
6	Thermal shock	Ta = -20 °C ↔ 60 °C (0.5 hr), 60%±3%RH, 100 cycle
7	Vibration test (non-operating)	Ta = 25°C , 60%RH, 1.5G, 10~500Hz, Half Sine X,Y,Z / Sweep rate : 1 hour
8	Shock test (non-operating)	Ta = 25°C , 60%RH, 220G, Half Sine Wave 2msec±X,±Y,±Z Once for each direction
9	Electro-static discharge test (non-operating)	Air : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV Ta = 25°C , 60%RH,

12.0 HANDLING & CAUTIONS

(1) Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

(2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

(3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

SPEC. NUMBER

SPEC. TITLE

PAGE

B82018060

NE140FHM-N61 V8.0 Product Specification Rev. P1

25 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

(4) Cautions for the atmosphere

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

(5) Cautions for the module characteristics

- Do not apply fixed pattern data signal to the LCD module at product aging.
- Applying fixed pattern for a long time may cause image sticking.

(6) Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc. Please pack the module not to be broken. We recommend to use the original shipping packages.

13.0 LABEL

(1) Product Label

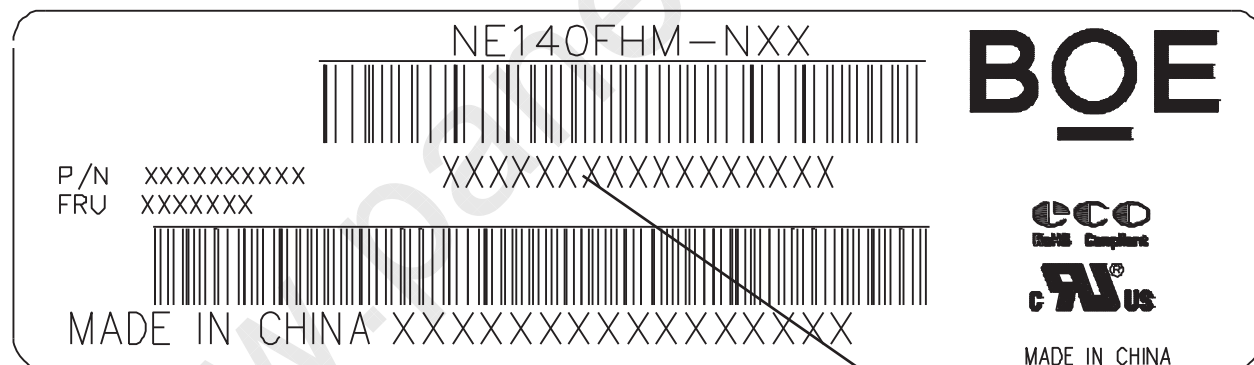


Figure 17. Product Label

Module ID Naming Rule:

<Table 14. Module ID Naming Rule>

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Code	B	9	A	F	1	7	8	8	D	3	8	0	0	0	0	6	8
Description	Product Name		Product Grade	B8	Year	Month	Model Extension Code (Last 4 Digits of FG CODE)				Serial No. 00001-ZZZZZZ						

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 26 OF 34
---------------------------	--	------------------

B2014-Q011-O (3/3)

A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

(2) High voltage caution label

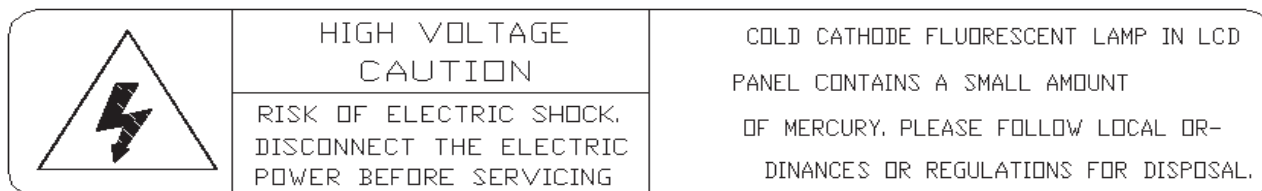


Figure 18. High Voltage Caution Label

(3) Box Label

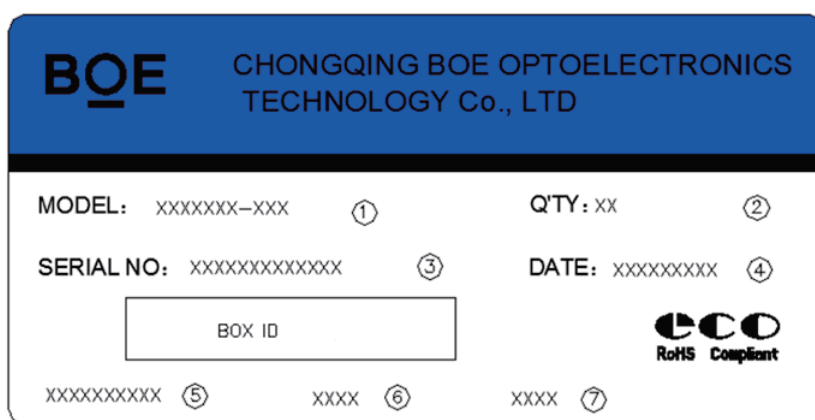


Figure 19. Box Label

Serial number marked part needs to print, show as follows:

1. FG-CODE(Before 12 bit)
2. Product quantity
3. Box ID
4. Date
5. The client section material number(The client)---
6. FG-Code After four ---DRA0
7. The supplier code ---

Total Size:100×50mm

<Table 15. Box Label Naming Rule >

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	B	9	A	F	1	7	8	N	0	0	3	2	7
Description	Product Name		Product Grade	B8	Year		Month	Revision	BOX Serial Number				


SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 27 OF 34
---------------------------	--	------------------



	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

14.0 PACKING INFORMATION

14.1 Packing Order

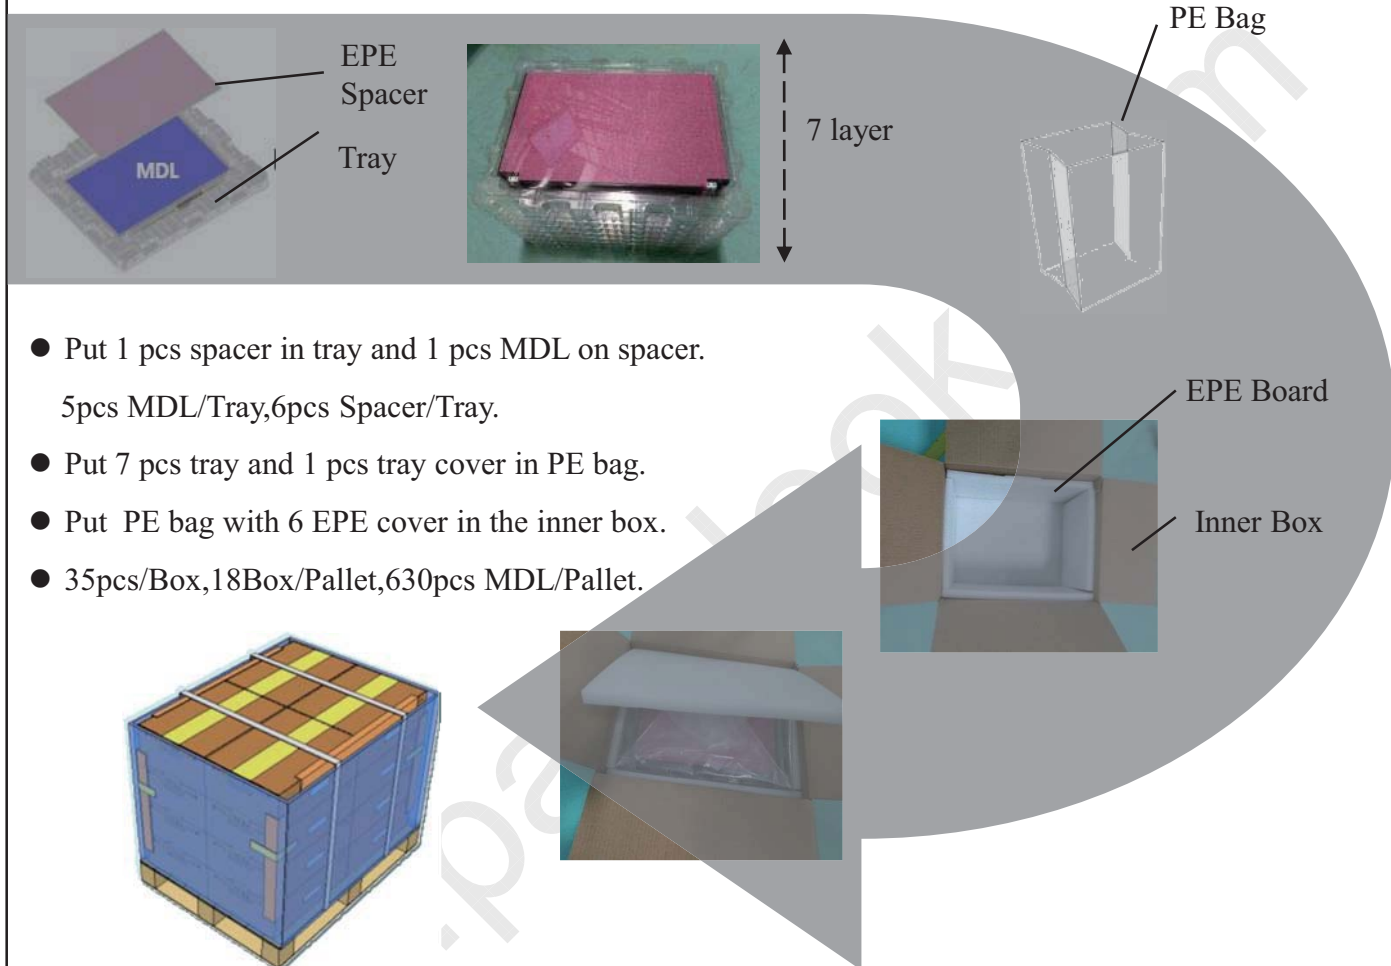

- Put 1 pcs spacer in tray and 1 pcs MDL on spacer.
5pcs MDL/Tray,6pcs Spacer/Tray.
- Put 7 pcs tray and 1 pcs tray cover in PE bag.
- Put PE bag with 6 EPE cover in the inner box.
- 35pcs/Box,18Box/Pallet,630pcs MDL/Pallet.

Figure 20. Packing Order

14.2 Note

- Box dimension: 480mm*350mm*285mm
- Package quantity in one box: 35pcs
- Total weight: TBD kg/Box

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 28 OF 34
---------------------------	--	------------------

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

15.0 MECHANICAL OUTLINE DIMENSION

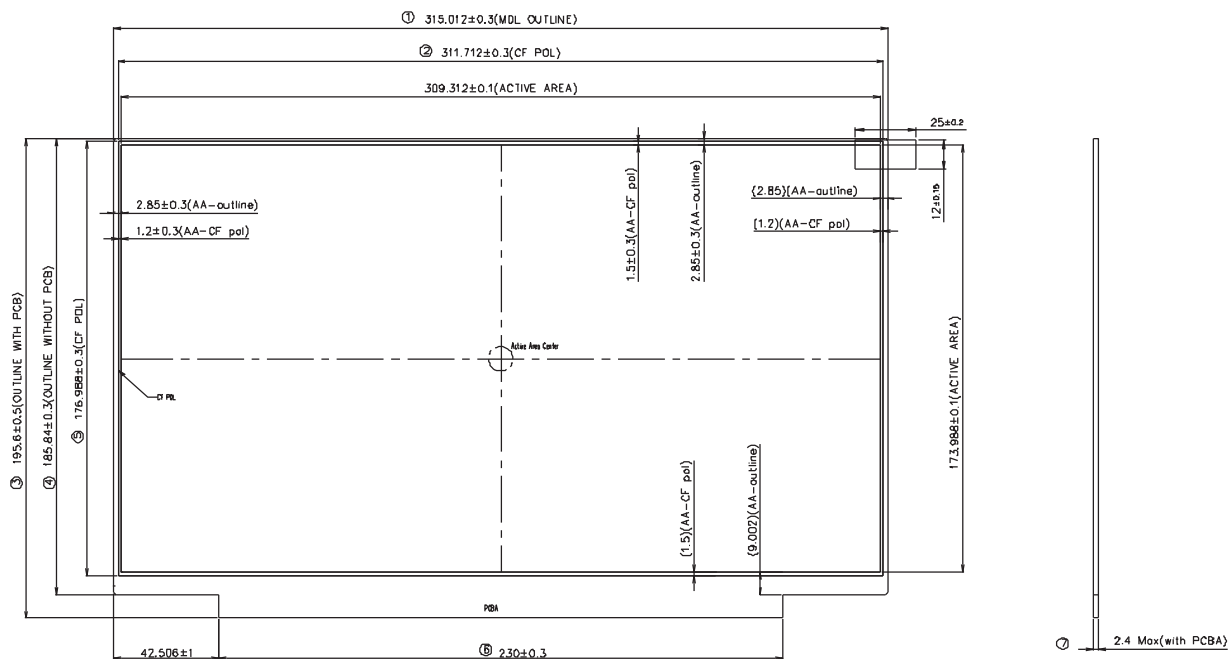


Figure 21. TFT-LCD Module Outline Dimension (Front View)

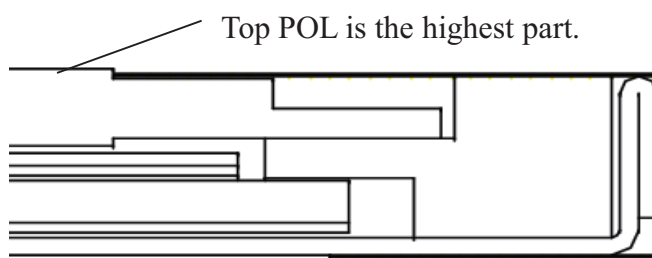


Figure 22. Highest Point Position

Note:

1. Warps And Deformation spec 0.5mm Max.
2. EDP connector is mearued at PIN 1 and MATING LINE.
3. Unspecified tolerances refer to Grade "2".
4. Key dimensions: ① - ⑨
5. Top polarizer is the highest position of LCD, and any other componet is below the top polarizer.
6. The MDL border tolerance measure tool is a Vernier Caliper.

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 29 OF 34
---------------------------	--	------------------

	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

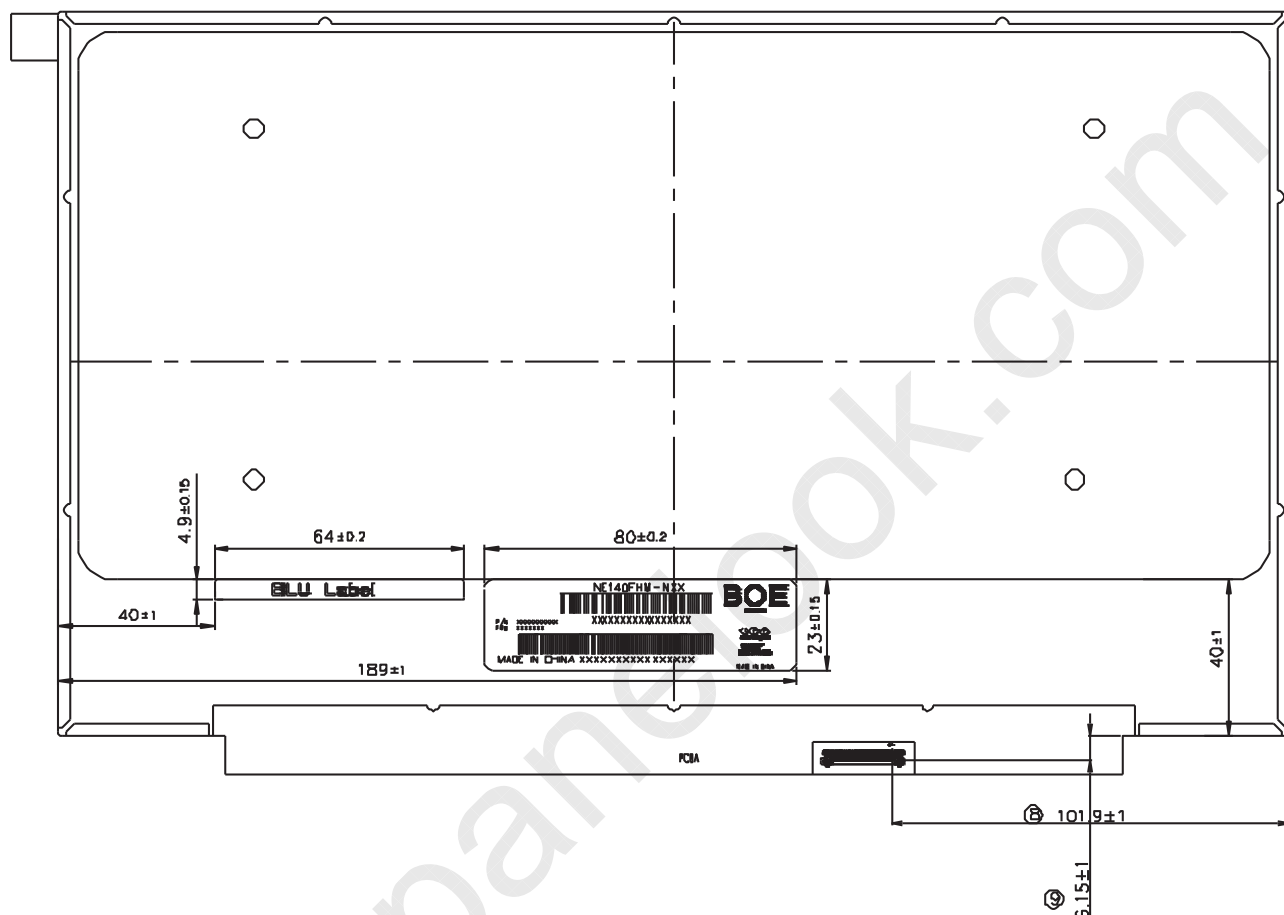


Figure 23. TFT-LCD Module Outline Dimensions (Rear view)

Note:

1. Warps And Deformation spec 0.5mm Max.
2. EDP connector is mearued at PIN 1 and MATING LINE.
3. Unspecified tolerances refer to Grade "2".
4. Key dimensions: ① - ⑨
5. Top polarizer is the highest position of LCD, and any other componet is below the top polarizer.
6. The MDL border tolerance measure tool is a Vernier Caliper.

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 30 OF 34
---------------------------	--	------------------

B2014-Q011-O (3/3)

A4(210 X 297)



BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

16.0 EDID Table

00	Header	00	0		0	EDID Header
01		FF	255		255	
02		FF	255		255	
03		FF	255		255	
04		FF	255		255	
05		FF	255		255	
06		FF	255		255	
07		00	0		0	
08	ID Manufacturer Name	09	9		BOE	ID = BOE
09		E5	229			
0A	ID Product Code	DB	219		2011	ID = 2011
0B		07	7			
0C	32-bit serial No.	00	0		0	
0D		00	0		0	
0E		00	0		0	
0F		00	0		0	
10	Week of manufacture	01	1		1	
11	Year of Manufacture	1C	28		2018	Manufactured in 2018
12	EDID Structure Ver.	01	1		1	EDID Ver 1.0
13	EDID revision #	04	4		4	EDID Rev. 0.4
14	Video input definition	A5	165		-	Refer to right table
15	Max H image size	1F	31		31	31 cm (Approx)
16	Max V image size	11	17		17	17.4 cm (Approx)
17	Display Gamma	78	120		2.2	Gamma curve = 2.2
18	Feature support	02	2		-	Refer to right table
19	Red/Green low bits	7D	125		-	Red / Green Low Bits
1A	Blue/White low bits	50	80		-	Blue / White Low Bits
1B	Red x high bits	A6	166	665	0.650	Red (x) = 10100110 (0.65)
1C	Red y high bits	57	87	351	0.343	Red (y) = 01010111 (0.343)
1D	Green x high bits	52	82	327	0.320	Green (x) = 01010010 (0.32)
1E	Green y high bits	9F	159	637	0.623	Green (y) = 10011111 (0.623)
1F	Blue x high bits	27	39	157	0.154	Blue (x) = 00100111 (0.154)
20	BLUE y high bits	12	18	73	0.072	Blue (y) = 00010010 (0.072)
21	White x high bits	50	80	320	0.313	White (x) = 01010000 (0.313)
22	White y high bits	54	84	336	0.329	White (y) = 01010100 (0.329)

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 31 OF 34
---------------------------	--	------------------

B2014-Q011-O (3/3)

A4(210 X 297)



BOE	PRODUCT GROUP				REV	ISSUE DATE
	Customer Spec				Rev. P1	2018.08.17

23	Established timing 1	00	0		-	Refer to right table
24	Established timing 2	00	0		-	
25	Established timing 3	00	0		-	
26	Standard timing #1	01	1			Not Used
27		01	1			
28	Standard timing #2	01	1			Not Used
29		01	1			
2A	Standard timing #3	01	1			Not Used
2B		01	1			
2C	Standard timing #4	01	1			Not Used
2D		01	1			
2E	Standard timing #5	01	1			Not Used
2F		01	1			
30	Standard timing #6	01	1			Not Used
31		01	1			
32	Standard timing #7	01	1			Not Used
33		01	1			
34	Standard timing #8	01	1			Not Used
35		01	1			
36	Detailed timing/monitor descriptor #1	3A	58		143.9	143.9424MHz Main clock
37		38	56			
38		80	128		1920	Hor Active = 1920
39		DE	222		222	Hor Blanking = 222
3A		70	112		-	4 bits of Hor. Active + 4 bits of Hor. Blanking
3B		38	56		1080	Ver Active = 1080
3C		28	40		40	Ver Blanking = 40
3D		40	64		-	4 bits of Ver. Active + 4 bits of Ver. Blanking
3E		30	48		48	Hor Sync Offset = 48
3F		20	32		32	H Sync Pulse Width = 32
40		36	54		3	V sync Offset = 3 line
41		00	0		6	V Sync Pulse width : 6 line
42		36	54		310	Horizontal Image Size = 310 mm (Low 8 bits)
43		AE	174		174	Vertical Image Size = 174 mm (Low 8 bits)
44		10	16		-	4 bits of Hor Image Size + 4 bits of Ver Image Size
45		00	0		0	Hor Border (pixels)
46	00	0		0	Vertical Border (Lines)	
47	1A	26		-	Refer to right table	

SPEC. NUMBER B82018060	SPEC. TITLE NE140FHM-N61 V8.0 Product Specification Rev. P1	PAGE 32 OF 34
---------------------------	--	------------------

B2014-Q011-O (3/3)

A4(210 X 297)



BOE		PRODUCT GROUP				REV	ISSUE DATE
		Customer Spec				Rev. P1	2018.08.17
48	Detailed timing/monitor descriptor #2	FB	251		115	115.15392MHz Main clock	
49		2C	44				
4A		80	128		1920	Hor Active = 1920	
4B		DE	222		222	Hor Blanking = 222	
4C		70	112		-	4 bits of Hor. Active + 4 bits of Hor. Blanking	
4D		38	56		1080	Ver Active = 1080	
4E		28	40		40	Ver Blanking = 40	
4F		40	64		-	4 bits of Ver. Active + 4 bits of Ver. Blanking	
50		30	48		48	Hor Sync Offset = 48	
51		20	32		32	H Sync Pulse Width = 32	
52		36	54		3	V sync Offset = 3 line	
53		00	0		6	V Sync Pulse width : 6 line	
54		36	54		310	Horizontal Image Size = 310 mm (Low 8 bits)	
55		AE	174		174	Vertical Image Size = 174 mm (Low 8 bits)	
56		10	16		-	4 bits of Hor Image Size + 4 bits of Ver Image Size	
57		00	0		0	Hor Border (pixels)	
58		00	0		0	Vertical Border (Lines)	
59		1A	26		-	Refer to right above table	
5A		Detailed timing/monitor descriptor #3	00	0			Indicates descriptor #3 is a display Descriptor
5B	00		0				
5C	00		0			Reserved	
5D	FE		254			Tag : ASCII String	
5E	00		0			Reserved	
5F	42		66		B	Manufacture name : BOECQ	
60	4F		79		O		
61	45		69		E		
62	20		32				
63	43		67		C		
64	51		81		Q		
65	0A		10				
66	20		32				
67	20		32				
68	20	32					
69	20	32					
6A	20	32					
6B	20	32					
SPEC. NUMBER		SPEC. TITLE				PAGE	
B82018060		NE140FHM-N61 V8.0 Product Specification Rev. P1				33 OF 34	

B2014-Q011-O (3/3)

A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2018.08.17

6C	Detailed timing/monitor descriptor #4	00	0			Indicates descriptor #4 is a display Descriptor
6D		00	0			
6E		00	0			Reserved
6F		FE	254			Tag : ASCII String
70		00	0			Reserved
71		4E	78		N	Model name : NE140FHM-N61
72		45	69		E	
73		31	49		1	
74		34	52		4	
75		30	48		0	
76		46	70		F	
77		48	72		H	
78		4D	77		M	
79		2D	45		-	
7A		4E	78		N	
7B		36	54		6	
7C	31	49		1		
7D	0A	10				
7E	Extension flag	00	0		1	Extension flag
7F	Checksum	41	65	65	-	

SPEC. NUMBER

B82018060

SPEC. TITLE

NE140FHM-N61 V8.0 Product Specification Rev. P1

PAGE

34 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)